




Quality Through Innovation™

# FEEDBACK SUPPRESSOR SYSTEM

## KR-7100 FSS

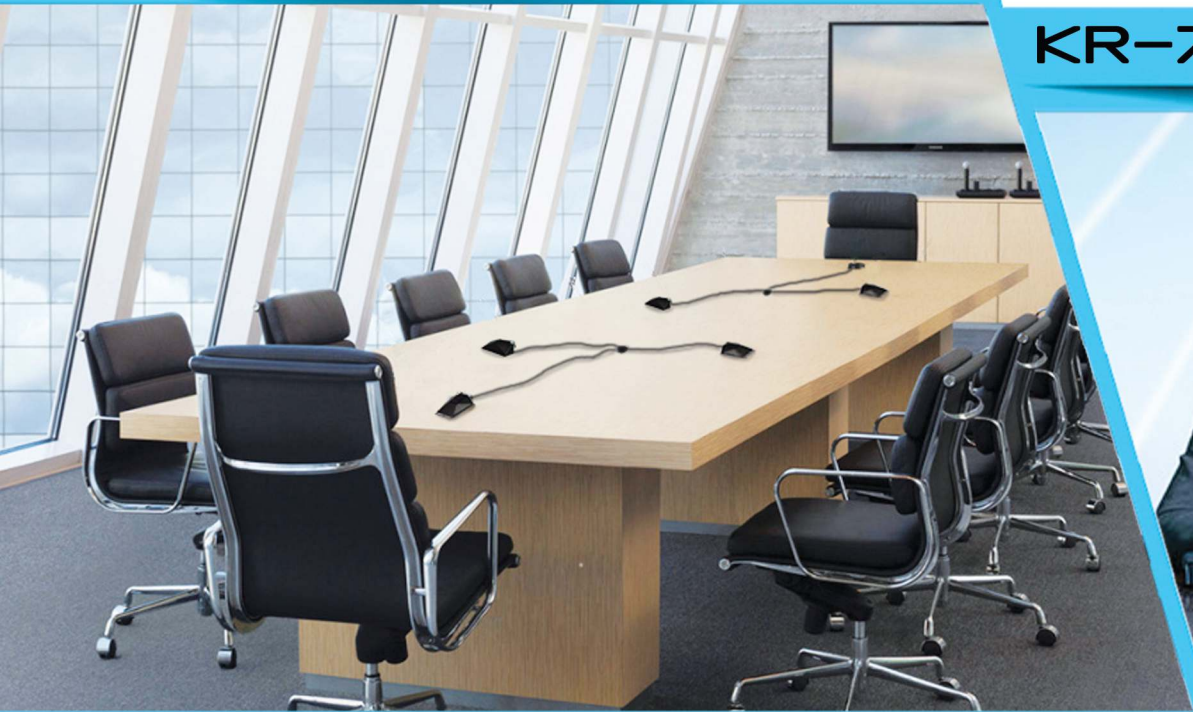

### Specification :

- 6 CH phantom microphone input
- Power supply : AC220~230V,50/60hz
- Frequency shift : 5Hz±1Hz
- Input impedance : ≥5KΩ
- Output Impedance : ≤600Ω
- Microphone gain : 5~14dB
- Frequency response :
  - \*20Hz-20KHz in frequency non-shift state
  - \*150Hz-15KHz in frequency shift state

**1 YEAR WARRANTY**  
\*Conditions Apply



\*Front



\*Back

KREZT.CO.ID

NOTE : features and specifications are subject to change without notice. All images and illustrations are provided for information purpose only.