

**Makita**<sup>®</sup>

# 2022

PRODUCT CATALOGUE



## Daftar Isi

40Vmax line up	6
18Vx2 line up	37
18V line up	48
12V line up	69
Cordless tools	5
Drilling / fastening	89
Impact drilling / demolition	92
Cutting	95
Grinding / sanding	97
Sawing	102
Planing / routing	105
<b>1</b>	
1805N	106
1911B	106
<b>2</b>	
2012NB	106
2414NB	96
2416S	96
2703	103
2712	103
<b>3</b>	
3501N	106
3601B	106
3709	106
<b>4</b>	
4107R	96
4112HS	96
4327M	104
4329	104
<b>5</b>	
5008MG	103
5800NB	103
<b>6</b>	
6412	90
6906	91
6922NB	91
6924N	91
<b>9</b>	
9031	101
9032	101
9046	101
9237C	100
9404	101
9553B	99
9558HNG	99
9920	101
<b>A</b>	
AS001GZ	29
<b>B</b>	
BO3710	101
BO3711	101
BO4556	101
BO5041	101
BO6050J	101
<b>C</b>	
CA5000X	96
CC301D	72
CE001G	23
CF002G / DCF301	84
CG100D	73
CL001G / CL002G / CL003G	77
CL104D	83
CL107FD	83
CL114FD	83
CL121D	82
CP100D	72
CS002G	23
CW001G	84
<b>D</b>	
DA001G	18
DA3010F	90
DA333D	70
DBO180	59
DBO381	59
DBO480	59
DBO481 / DBO482	59
DBS180	59
DCC500	55
DCE090	38
DCG180	61
DCL182	81
<b>D</b>	
DCL184	82
DCL280	81
DCL281 / DCL282	81
DCL501Z	81
DCO181	60
DCS550	57
DCS552	57
DCS553	57
DDA351	54
DDA450	53
DDF481	51
DDF484	50
DDF485	50
DDF486	50
DDF487	51
DDG460	46
DF001G	18
DF002G	18
DF012D	71
DF332D	70
DF333D	70
DF488D	51
DFJ212A	86
DFJ213A	86
DFJ214A	87
DFJ216A	87
DFJ312A	87
DFJ416A	87
DFN350	61
DFR452	54
DFR551	54
DFV210A	86
DFV214A	86
DFV215A	86
DG001G	34
DGA404	55
DGA417	55
DGA419 / DGA519	56
DGA511	55
DGA517	54
DGD800	55
DGP180	62
DHG181	63
DHP453	51
DHP458	51
DHP484	50
DHP485	50
DHP486	50
DHP487	51
DHR165	54
DHR242	54
DHS660	58
DHS710	39
DHS782	39
DHS901	39
DJR183	58
DJR187	58
DJR188	58
DJV181	58
DKP180Z	58
DKT360	84
DLM230	68
DLM330	68
DLM382 / DLM432	46
DLM462	45
DLM480 / DLM481	45
DLM530 / DLM532	45
DLM533	45
DLM538 / DLM539	45
DLS111	38
DLS211	38
DLW140	38
DMP180	63
DMP181	63
DMR108N	84
DMR110N	84
DMR116	84
DP3003	90
DP4003	90
DPB180	57
<b>D</b>	
DPB183	57
DPB184	57
DPO500	59
DPO600	58
DPP200	60
DPT353	61
DPV300	59
DRT50Z	58
DRV150	60
DRV250	60
DS4011	90
DSC102	55
DSC251	55
DSL801	60
DSP600	39
DST121	61
DST421	61
DTC300	63
DTD149	52
DTD154	52
DTD157	52
DTD171	52
DTD172	52
DTL063	54
DTM51	60
DTM52	60
DTR180	61
DTR181	61
DTW1001 / DTW1002	52
DTW180	53
DTW181Z	53
DTW190	53
DTW300	53
DTW302	53
DTW450	53
DTW700 / DTW701	52
DUA300	42
DUA301	42
DUB184	64
DUB185	64
DUB186	64
DUB361	40
DUB362	40
DUB363	40
DUC252	43
DUC254	66
DUC353	43
DUH483 / DUH523	67
DUH601 / DUH751	66
DUH604S / DUH754S	67
DUH651	41
DUM111Z	67
DUN461W	66
DUN500W	66
DUN600L	66
DUP361 / DUP362	46
DUR181	64
DUR189	65
DUR190L / DUR191L	65
DUR190U / DUR191U	65
DUR192L	65
DUR193	65
DUR365U	41
DUR369A	41
DUS054	68
DUS108	68
DUS158	68
DUX18	36
DUX60	35
DVC155L	79
DVC156L	79
DVC157L	79
DVC261	76
DVC350	81
DVC560	78
DVC660	76
DVC750L	80
DVC860L	80
DVC865L	79
DVC866L	80
<b>D</b>	
DVC867L	79
DVP180	63
DVP181	63
DWR180	54
DWT310	38
<b>F</b>	
FN001G	28
FS6300	90
<b>G</b>	
GA003G	22
GA005G	22
GA011G	22
GA013G	22
GA021G	22
GA022G	22
GA023G	22
GA024G	22
GA025G	22
GA026G	22
GA027G	22
GA028G	22
GA029G	22
GA030G	22
GA031G	22
GA032G	22
GA035G / GA036G	21
GA037G / GA038G	21
GA4030	99
GA4034	99
GA4040	99
GA4041C	99
GA5020	98
GA5080R	98
GA6020	98
GA7020	98
GA7050R01	98
GA7071	98
GA7082	98
GA9020	98
GA9071	98
GA9082	98
GB602	101
GB801	100
GD0600	100
GD0601	100
GD0603	100
GS5000	100
GV7000	100
HG6030	107
HG6530VK	107
HK1820	94
HM001G	15
HM002G	17
HM0810A	94
HM0871C	94
HM1201	94
HM1213C	94
HM1306	94
HM1317C	94
HM1501X1	94
HM1511X1	94
HM1810	94
HM1812	94
HP001G	16
HP002G	17
HP1630	93
HP2050	93
HP332D	70
HP333D	70
HP488D	51
HR001G	13
HR003G	14
HR005G	12
HR006G	12
HR007G	13
HR008G	13
HR009G	13
HR140D	71
HR166D	71
HR2230X5	93

H	
HR2460X5	93
HR2470X5	93
HR2631FX5	93
HR2810X5	93
HR3001CJ	93
HR3011FCJ	93
HR3541FC	93
HR4013C	93
HR5212C	93
HS003G / HS004G	26
HS009G / HS010G	26
HS011G	26
HS301D	72
J	
JN1601	96
JN3201J	96
JR001G	27
JR002G	27
JR103D	73
JR3051TK	104
JR3070CT	104
JS1602	96
JS3201J	96
JV101D	72
K	
KP0800XK	106
L	
LB1200F	104
LC1230	96
LD050P	74
LD080PI	74
LF1000	103
LM001C	47
LS002G	24
LS003G	24
LS004G	24
LS1019L	103
LS1040	103
LS1440	103
M	
MP001G	28
MP100D	74
MR002G	84
MR004G	84
N	
N3701	106
N5900B	103
N9500N	100
P	
PB002G	23
PC5001C	100
PJ7000	106
PT001G	28
PV001G	28
PV301D	72
PV7000C	100
R	
RP2302FC	106
RS001G	25
RS002G	25
RT001G	27
RT0702C	106
S	
SJ401	104
SK10GD	74
SK20GD	74
SK40GD	74
SK700D / SK700GD	74
SP001G	26
SP6000	103
T	
TD001G	17
TD0101	90
TD022D	72
TD111D	70
TW001G	19
TW004G	20
TW007G / TW008G	20
TW0350	91
TW1000	91

T	
TW140D	71
TW141D	71
TW160D	71
TW161D	71
U	
UA002G	31
UB001C	47
UB001G	28
UB100D	73
UB1103	107
UC002G / UC003G / UC004G	32
UC006G	31
UC4041A	107
UH004G / UH005G	33
UH006G / UH007G	33
UH008G / UH009G	33
UH013G / UH014G	34
UM110D	67
UN460WD	73
UR002G / UR003G	31
UR006G / UR007G / UR008G	31
UR012G	30
UR100D	73
UR101C	47
UR201C	47
US053D	73
UT2204	90
UX01G	35
V	
VC001GL	76
VC005GL	76
VC008G	76
W	
WR100D	72



## Tindakan Pengamanan

Saat menggunakan peralatan listrik, tindakan pencegahan keselamatan dasar harus selalu diikuti untuk mengurangi risiko kebakaran, sengatan listrik, dan cedera diri, termasuk yang berikut ini.

### /// JAGA KEBERSIHAN AREA KERJA.

Area dan bangku yang berantakan mengundang cedera.

### /// PERTIMBANGKAN LINGKUNGAN AREA KERJA.

Jangan gunakan alat-alat listrik di lokasi yang lembap atau basah. Jaga agar area kerja tetap bersih. Jangan biarkan alat-alat listrik terkena hujan. Jangan gunakan alat-alat listrik di dekat cairan atau gas yang mudah terbakar.

### /// JAUHKAN ANAK-ANAK.

Semua pengunjung harus dijauhkan dari area kerja. Jangan biarkan pengunjung menyentuh alat atau kabel ekstensi.

### /// SIMPAN ALAT YANG TIDAK DIGUNAKAN.

Saat tidak digunakan, alat harus disimpan di tempat yang kering dan terkunci, jauh dari jangkauan anak-anak.

### /// JANGAN PAKSA ALAT.

Ini akan membuat pekerjaan menjadi lebih baik dan lebih aman pada tingkat yang dimaksudkan.

### /// GUNAKAN ALAT YANG TEPAT.

Jangan paksa alat yang kecil atau alat tambahan untuk melakukan pekerjaan berat. Jangan gunakan alat untuk tujuan yang tidak dimaksudkan.

### /// BERPAKAIAN YANG BENAR.

Jangan memakai pakaian atau perhiasan yang longgar karena dapat tersangkut di bagian yang bergerak. Sarung tangan karet dan alas kaki anti selip direkomendasikan saat bekerja di luar ruangan. Kenakan penutup rambut pelindung untuk menahan rambut panjang.

### /// GUNAKAN KACAMATA KESELAMATAN.

Juga gunakan masker wajah atau debu jika operasi pemotongan berdebu.

### /// JANGAN MENYALAHGUNAKAN KABEL.

Jangan pernah membawa alat dengan kabelnya atau menariknya untuk melepaskannya dari soket. Jauhkan kabel dari panas, minyak, dan ujung yang tajam.

### /// KERJA AMAN.

Gunakan klem atau catok untuk menahan pekerjaan. Ini lebih aman daripada menggunakan tangan dan membebaskan kedua tangan untuk mengoperasikan alat.

### /// JANGAN MELAMPAUI BATAS YANG DITENTUKAN.

Jaga pijakan dan keseimbangan yang tepat setiap saat.

### /// MENJAGA ALAT DENGAN HATI-HATI.

Jaga agar alat pemotong tetap tajam dan bersih untuk kinerja yang lebih baik dan lebih aman. Ikuti petunjuk untuk pelumasan dan penggantian aksesoris. Periksa kabel alat secara berkala dan jika rusak perbaiki di fasilitas servis resmi. Periksa kabel ekstensi secara berkala dan ganti jika rusak. Jaga agar pegangan tetap kering, bersih dan bebas dari minyak/lemak.

### /// MELEPASKAN ALAT.

Saat tidak digunakan, sebelum diservis, dan saat mengganti aksesoris seperti mata pisau, mata bor, dan pemotong.

### /// HAPUS PENYESUAIAN TOMBOL DAN KUNCI PAS.

Bentuk kebiasaan memeriksa untuk melihat bahwa tombol dan penyesuaian kunci pas dihapus dari alat sebelum menyala.

### /// HINDARI MEMULAI YANG TIDAK DISENGAJA.

Jangan membawa alat yang terpasang dengan jari pada sakelar. Pastikan sakelar mati saat mencolokkan.

### /// GUNAKAN KABEL EKSTENSI LUAR RUANGAN.

Ketika alat digunakan di luar ruangan, gunakan hanya kabel ekstensi yang ditujukan untuk penggunaan di luar ruangan.

### /// TETAP WASPADA.

Perhatikan apa yang Anda lakukan. Gunakan akal sehat. Jangan mengoperasikan alat saat Anda lelah.

### /// PERIKSA BAGIAN YANG RUSAK.

Sebelum menggunakan alat lebih lanjut, pelindung atau bagian lain yang rusak harus diperiksa dengan cermat untuk menentukan bahwa alat itu akan beroperasi dengan benar dan melakukan fungsi yang dimaksudkan. Periksa keselarasan bagian yang bergerak, bagian yang bergerak bebas, kerusakan suku cadang, pemasangan dan kondisi lain yang dapat mempengaruhi operasinya. Pelindung atau bagian lain yang rusak harus diperbaiki atau diganti dengan benar oleh pusat layanan resmi kecuali dinyatakan lain dalam buku petunjuk ini. Ganti sakelar yang rusak oleh fasilitas servis resmi. Jangan gunakan alat jika sakelar tidak menyala dan mati.

### /// MENJAGA TERHADAP SENGATAN LISTRIK.

Hindari kontak tubuh dengan permukaan tanah atau ground (misal; pipa, radiator, rentang, lemari es).

### /// PENGANTIAN BAGIAN.

Saat menservis alat, gunakan hanya suku cadang pengganti yang ditentukan.

### /// PERINGATAN TEGANGAN.

Sebelum menghubungkan alat ke sumber daya (wadah, outlet, dll.) pastikan tegangan yang diberikan sama dengan yang ditentukan pada papan nama alat. Sumber daya dengan tegangan lebih besar dari yang ditentukan untuk alat dapat mengakibatkan CEDERA SERIUS pada pengguna V serta kerusakan pada alat. Jika ragu, JANGAN COLOKKAN ALATNYA. Menggunakan sumber daya dengan tegangan kurang dari peringkat papan nama berbahaya bagi motor.

## Catatan

- Makita berhak mengubah spesifikasi suku cadang dan aksesoris tanpa pemberitahuan.
- Item perlengkapan dan spesifikasi standar dapat berbeda di setiap negara atau wilayah.
- Berat bersih dan dimensi mungkin berbeda menurut jenis baterai.
- Warna standar ekspor untuk perumahan motor adalah Makita industri hijau (biru).
- Harap sebutkan tegangan yang diperlukan saat memesan. Penawaran ini tergantung ketersediaan di setiap negara. Warna produk yang sebenarnya mungkin sedikit berbeda dari warna yang direproduksi di sini.
- Beratnya mungkin berbeda tergantung pada lampiran, termasuk kartrid baterai. Kombinasi paling ringan dan terberat, menurut EPTA-Prosedur 01/2014.

## Garansi

Setiap alat Makita diperiksa dan diuji secara menyeluruh sebelum meninggalkan pabrik. Dijamin terhadap pengerjaan dan bahan yang rusak. Jika ada masalah yang berkembang, kembalikan alat lengkap prabayar ke Makita atau tempat pembelian. Jika pemeriksaan menunjukkan masalah yang disebabkan oleh pengerjaan material yang cacat, semua perbaikan akan dilakukan tanpa biaya. Garansi tidak berlaku di mana perbaikan telah dilakukan atau dicoba oleh orang lain; perbaikan disebabkan keausan normal; alat telah disalahgunakan atau dalam kecelakaan; penyalahgunaan terbukti - disebabkan oleh kelebihan alat di luar kapasitasnya, penggunaan alat setelah kegagalan sebagian atau penggunaan dengan aksesoris yang tidak tepat.

# PRODUCTS

## ▣ CORDLESS TOOLS





# 40V Li-ion max

LED Worklight  
ML002G / ML003G



Job Site Radio  
MR001G / MR002G /  
MR003G / MR004G

Flashlight  
ML001G



**Kekuatan tinggi**

**Daya tahan**

**Komunikasi digital**


Brad Nailer  
FN001G



Fan  
CF001G / CF002G



Hedge Trimmer  
UH004G / UH005G / UH006G /  
UH007G / UH008G / UH009G




Blower  
UB001G



Earth Auger  
DG001G



Grass Trimmer  
UR002G / UR003G / UR006G /  
UR007G / UR008G

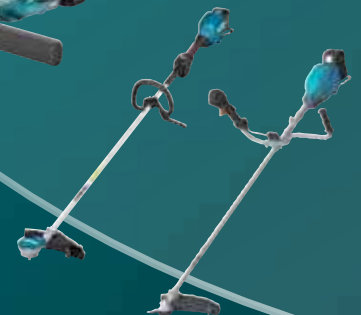

Rotary Hammer  
HR006G



Demolition Hammer  
HM002G



## Battery

BL4020 ( 2.0Ah )    BL4025 ( 2.5Ah )





**Impact Driver**  
TD001G



**Driver Drill**  
DF001G / DF002G



**Hammer Driver Drill**  
HP001G / HP002G



**Rotary Hammer**  
HR005G



**Impact Wrench**  
TW001G / TW004G / TW005G /  
TW007G / TW008G



**Angle Drill**  
DA001G / DA002G



**Demolition Hammer**  
HM001G



**Combination Hammer**  
HR001G / HR002G /  
HR003G / HR004G



**Angle Grinder**  
GA003G / GA004G / GA005G / GA006G / GA007G / GA008G / GA011G /  
GA012G / GA013G / GA014G / GA015G / GA016G / GA021G / GA022G /  
GA023G / GA024G / GA025G / GA026G / GA027G / GA028G / GA029G /  
GA030G / GA031G / GA032G / GA035G / GA036G / GA037G / GA038G

**Circular Saw**  
HS003G / HS004G

**Recipro Saw**  
JR001G



**Multi Function Power Head**  
UX01G



**Cleaner**  
CL001G



**Rear Handle Saw**  
RS001G / RS002G



**Slide Compound Miter Saw**  
LS002G / LS003G



### Charger

BL4040 ( 4.0Ah )



BL4050F ( 5.0Ah )



DC40RA



DC40RB



DC40RC



ADP10  
Adapter for LXT Battery



Alat ◀▶ Baterai ◀▶ Charger Baterai  
**Komunikasi digital**

XGT adalah sistem baru yang mencakup alat, baterai, dan charger itu sendiri. Paduan dari desain alat yang inovatif serta baterai dengan output lebih tinggi memberikan solusi tepat untuk kebutuhan industri dengan pemakaian beban tinggi.

## Sistem Daya Listrik dan Sistem Pengisian yang Optimal

Rangkaian alat dan baterai XGT dilengkapi dengan program bawaan, yang menyediakan komunikasi digital antara baterai dan alat. Memungkinkan tidak hanya baterai yang dapat berkomunikasi dengan alat tetapi alat juga dapat berkomunikasi dengan baterai. Teknologi baterai dan perancangan motor ini bekerja sama untuk memberikan kinerja optimal.




### Sistem pengisian optimal

Sistem perawatan otomatis dengan dua kipas pendingin untuk memberikan pengisian cepat yang lebih optimal.

## Konstruksi Tangguh


Spesifikasi berdaya tahan tinggi yang khusus didesain untuk baterai 40Vmax Li-ion

Indikator isi baterai dengan 4 LED

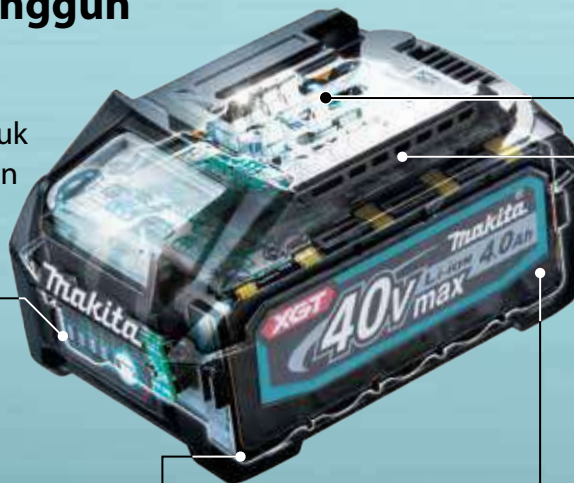


**Dinding**

**Struktur pencegah arus pendek di terminal**  
Dinding pelindung di antara terminal untuk melindungi dari air dan debu.

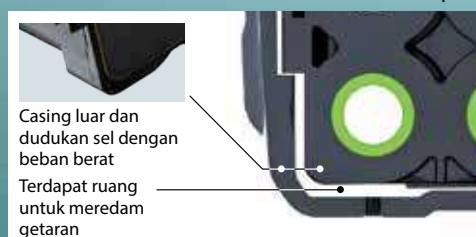

Casing luar danudukan sel dengan beban berat  
Terdapat ruang untuk meredam getaran

**Struktur peredam guncangan**

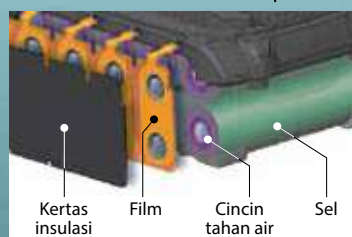

Kertas insulasi Film Cincin tahan air Sel

**Struktur Tahan Air Tiga Lapis**

Mencegah kerusakan sel akibat air dan debu.



Rel baterai

**Rel Baterai yang Kokoh**

Rel baterai yang tahan lama mampu menggerakkan baterai dan alat dengan kuat dan aman untuk bertahan dari penggunaan alat berdaya tinggi

**Film mekanisme 40Vmax**

Pengambilan film ini dilakukan di Jepang. Model dan spesifikasi dapat bervariasi per negara.




**Sistem Pengisian Cepat Optimal**

Diperlukan pendinginan sebelum mulai mengisi daya saat suhu baterai tinggi.

Kipas internal mensirkulasikan udara melalui baterai sebelum memulai pengisian dan selama proses pengisian untuk mendinginkan baterai untuk waktu pengisian yang lebih cepat.

**Sistem pengisian yang optimal**

Pendinginan udara buatan



Pengisian cepat



**Metode pengisian umum**


Pelepasan panas secara alami




Waktu tunggu untuk pengisian daya




Pengisi Daya Optimal Cepat Makita berkomunikasi dengan chip internal baterai selama proses pengisian daya untuk mengoptimalkan masa pakai baterai dengan mengontrol arus, tegangan, dan suhu secara aktif.

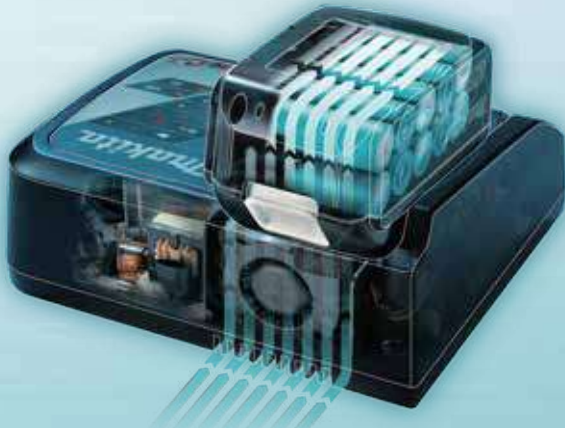


**Sistem pengisian yang optimal**



**Metode pengisian umum**

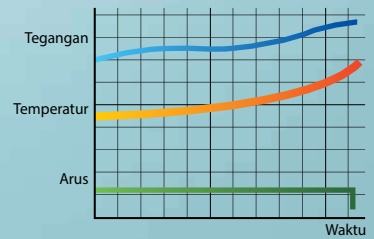

**Fungsi Perlindungan Baterai**

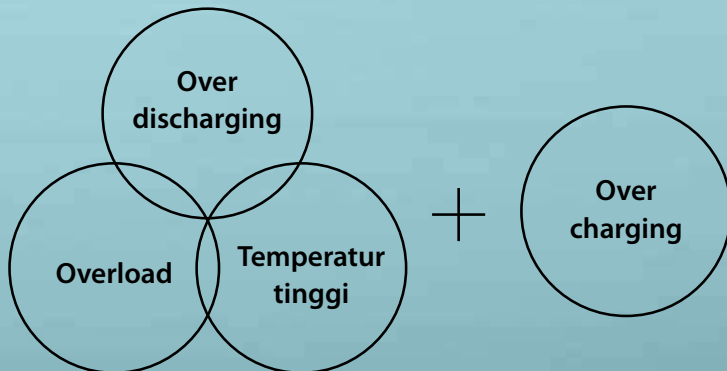

Fungsi ini adalah teknologi komunikasi yang memungkinkan tool dan baterai memantau kondisi dan saling bertukar data secara real time untuk melindungi dari Overload, Over-Discharge, dan Overheating.

**Dapat di-charge kapan pun**

Tanpa Memory Effect  
Tidak perlu discharging




**Peredam Guncangan Heavy Duty Pack**



**Genggaman Kuat**

Terminal multi-kontak mengurangi hambatan listrik dan meningkatkan stabilitas koneksi dalam melindungi dari getaran, sehingga memastikan suplai arus yang stabil ke alat.

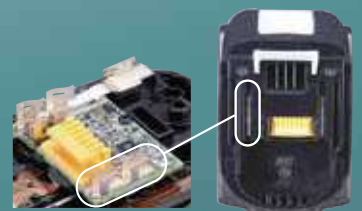

# Baterai Li-ion & Referensi Waktu Pengisian, Bagan Kompatibilitas


















































40Vmax		18V	Fast Charging DC40RA DC40RB*	DC40RC	Fast Charging DC40RA + ADP10 Kompatibel dengan baterai Li-Ion LXT	DC40RC + ADP10 Kompatibel dengan baterai Li-Ion LXT	Fast Charging DC18RC DC18RD* DC18RE**	DC18SF Except BL1430A	DC18SD DC18SH* DC18SE (Otomotif)
<b>XGT</b>  40Vmax Lithium-ion	5.0Ah BL4050F	50menit	85menit	-	-	-	-	-	
	4.0Ah BL4040	45menit	67menit	-	-	-	-	-	
	2.5Ah BL4025	28menit	38menit	-	-	-	-	-	
	2.0Ah BL4020	22menit	30menit	-	-	-	-	-	
<b>LXT</b>  18V Lithium-ion	6.0Ah BL1860B	-	-	40menit	85menit	55menit	1-2 baterai 130menit	3-4 baterai 260menit	130menit
	5.0Ah BL1850B	-	-	35menit	70menit	45menit	110menit	220menit	110menit
	4.0Ah BL1840B	-	-	29menit	58menit	36menit	90menit	180menit	90menit
	3.0Ah BL1830B	-	-	22menit	42menit	22menit	60menit	120menit	60menit
	2.0Ah BL1820B	-	-	24menit	33menit	24menit	45menit	90menit	45menit
	1.5Ah BL1815N	-	-	15menit	22menit	15menit	30menit	60menit	30menit

12Vmax Lithium-ion		Fast Charging DC10SB DC18RE**	DC10WD	PDC1200	DC4001	PDC01	Didukung oleh hingga empat Baterai LXT 18V
4.0Ah BL1041B	60menit	130menit		40Vmax Lithium-ion	360menit	18V x2 Lithium-ion	
2.0Ah BL1021B	30menit	70menit		18V x2 Lithium-ion		18V Lithium-ion	
1.5Ah BL1016	22menit	50menit					

10.8V Lithium-ion	7.2V Lithium-ion	DC10WA	18V Lithium-ion	14.4V Lithium-ion	DC18WA
1.3Ah BL1013	50menit		1.5Ah BL1415G BL1815G	70menit	
1.5Ah BL0715	35menit				

\*DC40RB / DC18RD / DC18SH: Pengisi Daya Cepat Dua Port  
\*\*DC18RE: Pengisi Daya Cepat Port Ganda CXT & LXT

# Aturan penamaan untuk model Charger dan Baterai (Baterai Li-ion Makita)

				 <p>Hanya Unit</p>		 <p>Unit + 2 Baterai + 1 Charger (DC40RA)</p>			
 <p>2.0Ah BL4020</p>				***GZ					
 <p>2.5Ah BL4025</p>						***GD201			
 <p>4.0Ah BL4040</p>						***GM201			
				 <p>Hanya Unit</p>		 <p>Unit + 1 Baterai + 1 Charger (DC18SD)</p>		 <p>Fast Charging Unit + 1 Baterai + 1 Charger (DC18RC)</p>	
								 <p>Fast Charging Unit + 2 Baterai + 1 Charger (DC18RC)</p>	
								 <p>Fast Charging Unit + 2 Baterai + 1 Charger (DC18RC) + MAKPAK (BOX)</p>	
								 <p>Fast Charging Unit + 2 Baterai + 1 Charger (DC18RC)</p>	
								 <p>Fast Charging Unit + 2 Baterai + 1 Charger (DC18RD)</p>	
 <p>3.0Ah BL1830 BL1830B</p>				D***Z		D***SF			
 <p>4.0Ah BL1840 BL1840B</p>								D***RME	
 <p>5.0Ah BL1850 BL1850B</p>						D***RT		D***RTE	
								D***RTJ	
								D***RT2	
								D***PT2	
				 <p>Hanya Unit</p>		 <p>Unit + 1 Baterai + 1 Charger (DC18SD)</p>		 <p>Fast Charging Unit + 1 Baterai + 1 Charger (DC18RC)</p>	
								 <p>Fast Charging Unit + 2 Baterai + 1 Charger (DC18RC)</p>	
								 <p>Fast Charging Unit + 2 Baterai + 1 Charger (DC18RC) + MAKPAK (BOX)</p>	
								 <p>Fast Charging Unit + 2 Baterai + 1 Charger (DC18RC)</p>	
								 <p>Fast Charging Unit + 2 Baterai + 1 Charger (DC18RD)</p>	
 <p>3.0Ah BL1430 BL1430B</p>				D***Z		D***SF			
 <p>4.0Ah BL1440</p>								D***RME	
 <p>5.0Ah BL1450</p>						D***RT		D***RTE	
								D***RTJ	
								D***RT2	
								D***PT2	
				 <p>Unit + 2 Baterai + 1 Charger (DC10WA atau DC10WD)</p>		 <p>Unit + 2 Baterai + 1 Charger (DC10SB)</p>			
 <p>1.5Ah BL1016</p>				***DWYE		***DSYE			
 <p>2.0Ah BL1021B</p>				***DWAE		***DSAE			
				(Charger DC10WD)		(Charger DC10SB)			
									
 <p>1.5Ah BL0715</p>				***DWYE		***DSYE			
 <p>2.0Ah</p>				***DWAE		***DSAE			
				(Charger DC10WD)		(Charger DC10SB)			

## Cordless Rotary Hammer

HR006G / HR005G

## Kekuatan pengeboran/penghancuran yang luar biasa



### HR006G

40Vmax X2 (80Vmax) XGT BL AFT AWS AVT SOFT NO LOAD Cordless 52 mm (2-1/16") 21,4 J Rotary Hammer, SDS-MAX Bits

Cordless Rotary Hammer

- Motor BL tangguh memberikan energi tumbukan 20 J untuk menangani pemakaian yang paling berat
- Active Feedback sensing Technology (AFT) mematikan motor jika putaran mata bor tiba-tiba terpaksa berhenti
- Anti-Vibration Technology (AVT) adalah sistem tiga komponen tersinkronisasi yang mengurangi getaran dengan lebih efektif
- Auto-Start Wireless System (AWS) dapat terhubung dengan Vacuum Cleaner kompatibel via Bluetooth



XGT BL AFT AWS AVT SOFT NO LOAD

XPT



Side Handle, Side Grip, Depth Gauge, Bit Grease, Cloth, Wireless Unit (country-specific), Wireless Unit Adapter (country-specific), Battery, Charger

Impact Energy	EPTA-Procedure 05/2009: 21,4 J
Capacity	Concrete (w/ TCT Bit): 52 mm (2-1/16")
Blows Per Minute	1.100 - 2.250 BPM
No Load Speed	150 - 310 RPM
Dimensions (L x W x H)	w/ BL4040: 610 x 140 x 337 mm
Net weight	12,9 - 14,3 kg

### HR005G

40Vmax XGT BL AFT AWS AVT SOFT NO LOAD Cordless 40 mm (1-9/16") Rotary Hammer, SDS-Max Bits, Twin LED Lights

Cordless Rotary Hammer

- Energi tumbukan 8,0 J memberikan kinerja tinggi setara HR4013C
- Motor BL memberikan daya tinggi dan kinerja luar biasa setara dengan corded tools model HR4013C
- Active Feedback sensing Technology (AFT) mematikan motor jika putaran mata bor tiba-tiba terpaksa berhenti
- Auto-Start Wireless System (AWS) dapat terhubung dengan Vacuum Cleaner kompatibel via Bluetooth
- Getaran rendah berkat Anti-Vibration Technology (AVT) & SOFT NO LOAD (menurunkan kecepatan motor saat tanpa beban)



XGT BL AFT AWS AVT SOFT NO LOAD

XPT



Side Handle, Side Grip, Depth Gauge, Bit Grease, Cloth, Wireless Unit (country-specific), Wireless Unit Adapter (country-specific), Battery, Charger

Impact Energy	EPTA-Procedure 05/2009: 8 J
Capacity	Concrete (w/ TCT Bit): 40 mm (1-9/16")
Blows Per Minute	1.450 - 2.900 BPM
No Load Speed	250 - 500 RPM
Dimensions (L x W x H)	w/ BL4020 / BL4025: 484 x 115 x 286 mm w/ BL4040: 500 x 115 x 286 mm w/ BL4050F: 520 x 115 x 305 mm
Net weight	7,4 - 8,2 kg

## HR009G Cordless Combination Hammer

40Vmax XGT BL AFT AWS AVT Cordless 30 mm (1-3/16")  
Combination Hammer, SDS-PLUS Bits, Quick Change Drill Chuck



**new**

Impact Energy	EPTA-Procedure: 3,9 J
Capacity	Concrete / Steel / Wood / Core Bit / Diamond Core Bit (Dry Type): 30 / 13 / 32 / 80 / 80 mm (1-3/16 / 1/2 / 1-1/4 / 3-1/8 / 3-1/8")
Blows Per Minute	0 - 4.500 BPM
No Load Speed	0 - 840 RPM
Chuck Capacity	1,5 - 13 mm (1/16 - 1/2")
Dimensions (L x W x H)	w/ BL4040: 438 x 103 x 242 mm
Net weight	5,2 - 6,1 kg

**XGT BL AFT AWS AVT XPT**



Quick change drill chuck

Quick Change Drill Chuck, Side Grip, Depth Gauge, Battery, Charger

## HR008G Cordless Combination Hammer

40Vmax XGT BL AFT AWS AVT Cordless 30 mm (1-3/16")  
Combination Hammer, SDS-PLUS Bits



**new**

Impact Energy	EPTA-Procedure: 3,9 J
Capacity	Concrete / Steel / Wood / Core Bit / Diamond Core Bit (Dry Type): 30 / 13 / 32 / 80 / 80 mm (1-3/16 / 1/2 / 1-1/4 / 3-1/8 / 3-1/8")
Blows Per Minute	0 - 4.500 BPM
No Load Speed	0 - 840 RPM
Chuck Capacity	1,5 - 13 mm (1/16 - 1/2")
Dimensions (L x W x H)	w/ BL4040: 422 x 103 x 242 mm
Net weight	5,2 - 6,2 kg

**XGT BL AFT AWS AVT XPT**



Side Grip, Depth Gauge, Battery, Charger



## HR007G 40Vmax XGT BL AFT AWS AVT Cordless 28 mm (1-1/8") Combination Hammer, SDS-PLUS Bits

Cordless Combination Hammer



**new**

- Efisiensi kerja HR007G setara atau lebih tinggi dari HR001G
- Kompatibel dengan sistem pengumpulan debu yang sama seperti yang digunakan untuk seri HR2663
- Motor BL memberikan daya tinggi dan kinerja luar biasa
- Auto-start Wireless System (AWS) terhubung ke penyedot debu yang kompatibel dengan Bluetooth



**XGT BL AFT AWS AVT XPT**



Side Grip, Depth Gauge, Battery, Charger, Cloth, Grease Vessel

Impact Energy	EPTA-Procedure 05/2009: 3,0 J
Capacity	Masonry: 28 mm (1-1/8")
Blows Per Minute	0 - 5.000 BPM
No Load Speed	0 - 980 RPM
Dimensions (L x W x H)	w/ BL4020 / BL4025: 458 x 101 x 234 mm w/ BL4040: 473 x 101 x 240 mm
Net weight	3,8 - 4,8 kg

## HR001G 40Vmax XGT BL AFT AWS AVT SOFT NO LOAD Cordless 28 mm (1-1/8") Combination Hammer, SDS-PLUS Bits

Cordless Combination Hammer



- Keseimbangan yang unggul, sehingga memudahkan penanganan dan pengendalian
- Anti-Vibration Technology (AVT) untuk tingkat getaran yang sangat rendah
- Daya tinggi setara dengan seri DHR282
- Auto-Start Wireless System (AWS) dapat terhubung dengan Vacuum Cleaner kompatibel via Bluetooth
- Active Feedback sensing Technology (AFT) mematikan motor jika putaran mata bor tiba-tiba terparka berhenti



**XGT BL AFT AWS AVT SOFT NOLOAD XPT**



Side Grip, Depth Gauge, Battery, Charger, Wireless Unit (country-specific), Dust Cup (country-specific), Cleaning cloth (country-specific), Bit Grease (country-specific)

Impact Energy	EPTA-Procedure 05/2009: 2,8 J
Capacity	Concrete / Steel / Wood / Core Bit / Diamond Core Bit (Dry Type): 28 / 13 / 32 / 54 / 65 mm (1-1/8 / 1/2 / 1-1/4 / 2-1/8 / 2-9/16")
Blows Per Minute	0 - 5.000 BPM
No Load Speed	0 - 980 RPM
Chuck Capacity	1,5 - 13 mm (1/16 - 1/2")
Dimensions (L x W x H)	w/ BL4020 / BL4025: 358 x 102 x 232 mm w/ BL4040: 373 x 102 x 238 mm
Net weight	3,9 - 4,6 kg

## Cordless Combination Hammer

### HR003G

# Daya dan efisiensi tinggi untuk pekerjaan profesional



Ringan

**3.9 kg**

Baterai: BL4025



Tingkat Getaran  
**7.0 m/s<sup>2</sup>**

### Sistem Ekstraksi Debu

**DX12**



**HEPA filter**

Mekanisme pembersihan filter

Motor DC bawaan untuk pengumpulan debu

**HR003G**

Cordless Combination Hammer

40Vmax XGT BL AVT Cordless 28 mm (1-1/8") Combination Hammer, SDS-PLUS Bits



- Keseimbangan yang unggul sehingga memudahkan penanganan dan pengendalian
- Dilengkapi dengan Anti-Vibration Technology (AVT) untuk tingkat getaran yang sangat rendah
- Daya tinggi setara dengan seri DHR282
- Memiliki 3 mode pengoperasian: "Rotation Only"; "Hammering with Rotation", atau "Hammering Only"
- Chuck geser sekali sentuh memungkinkan penggantian mata bor dengan cepat dan mudah



**XGT MOTOR BL AVT XPT**



Side Grip, Depth Gauge, Battery, Charger, Wireless Unit (country-specific), Dust Cup (country-specific), Cleaning cloth (country-specific), Bit Grease (country-specific)

Impact Energy Capacity	EPTA-Procedure 05/2009: 2.8 J Concrete / Steel / Wood / Core Bit / Diamond Core Bit (Dry Type): 28 / 13 / 32 / 54 / 65 mm (1-1/8" / 1/2" / 1-1/4" / 2-1/8" / 2-9/16") Masonry: 28 mm (1-1/8") Wood (Self-Feed Bit): 32 mm (1-1/4")
Blows Per Minute	0 - 5.000 BPM
No Load Speed	0 - 980 RPM
Chuck Capacity	1,5 - 13 mm (1/16 - 1/2")
Dimensions (L x W x H)	w/ BL4020 / BL4025: 358 x 121 x 232 mm w/ BL4040: 373 x 102 x 238 mm
Net weight	3,9 - 4,6 kg


## Cordless Demolition Hammer

HM001G

### **AWS** Auto-start Wireless System

dapat terhubung dengan Vacuum Cleaner kompatibel via Bluetooth. Vacuum Cleaner otomatis bekerja saat tombol dalam posisi menyala.

### **XPT** eXtreme Protection Technology

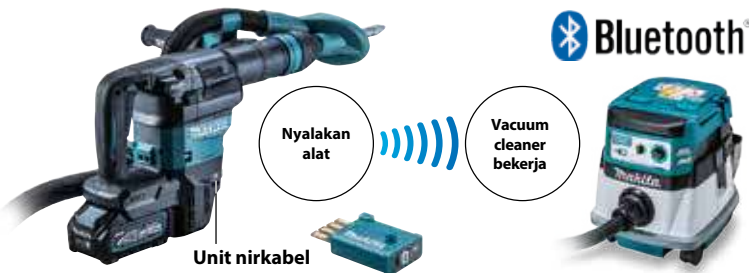

**BL**  
**MOTOR**

#### HM001G 40Vmax XGT BL AWS AVT SOFT NO LOAD 9,4 J Cordless Demolition Hammer, SDS-MAX Bits

Cordless Demolition Hammer

- Daya tinggi dan desain ringkas
- Pegangan peredam getaran memungkinkan pemakaian yang nyaman
- Anti-Vibration Technology (AVT) memastikan tingkat getaran yang sangat rendah
- Auto-Start Wireless System (AWS) dapat terhubung dengan Vacuum Cleaner kompatibel via Bluetooth
- Fungsi Soft No Load memastikan tingkat getaran rendah



**XGT** **BL** **AWS** **AVT** **SOFT NO LOAD** **XPT**



Bull Point, Grease for bit, Side Handle, Wireless Unit (country-specific), Wireless Unit Adapter (country-specific), Battery, Charger

Impact Energy	EPTA-Procedure 05/2009: 9,4 J
Blows Per Minute	0 - 2.650 BPM
Shank Diameter	18 mm (11/16")
Dimensions (L x W x H)	w/ BL4020 / BL4025: 481 x 113 x 258 mm
	w/ BL4040: 496 x 113 x 258 mm
	w/ BL4050F: 516 x 113 x 280 mm
Net weight	6,3 - 7,1 kg


## Cordless Hammer Driver Drill HP001G

### Menghasilkan Torsi Maksimal 140 N·m



#### 41 pengaturan kopling elektronik

Berbagai aplikasi berat yang lebih luas dicapai dengan meningkatkan pengaturan kopling




#### Active Feedback sensing Technology

mematikan motor jika kecepatan putar tiba-tiba melambat atau roda terpaksa berhenti

Lubang bor melalui SPF setebal 38 mm dengan 65 mm (2 - 9/16") bit self-feeding

HP001G	135	
Model Pendahulu 18V	100	
Rendah	Kecepatan pengeboran	Tinggi



Panjang keseluruhan yang ringkas untuk penanganan dan kontrol yang mudah

#### HP001G

Cordless Hammer Driver Drill



#### 40V<sup>max</sup> XGT BL AFT Cordless 13 mm (1/2") 125 N·m (1.100 in.lbs.) Hammer Driver Drill

- Kecepatan pengeboran luar biasa; Peningkatan kecepatan 20% atau lebih dibandingkan model sebelumnya
- Kecepatan maksimal lebih tinggi (0-2.600 RPM) pada mode tinggi untuk kecepatan pengeboran lebih tinggi dalam pemakaian light duty
- Transmisi 2 kecepatan variabel (0-650 & 0-2.600 RPM) untuk berbagai macam pemakaian pengeboran, pengencangan, dan hammer drilling
- Ukuran keseluruhan alat yang ringkas untuk memudahkan penanganan dan pengendalian



XGT MOTOR AFT XPT



Depth Gauge, Side Grip, Belt Clip, (+)(-) Bit, Bit Holder, Battery, Charger

Capacity	Steel: 20 mm (13/16") Wood (Auger-Bit): 50 mm (2") Wood (Self-Feed Bit): 76 mm (3") Siding Board: 220 mm (8-5/8")
Chuck Capacity	1,5 - 13 mm (1/16 - 1/2")
Impacts Per Minute	High / Low: 0 - 39,000 / 0 - 9,750 IPM
No Load Speed	High / Low: 0 - 2,600 / 0 - 650 RPM
Max Fastening Torque	Hard / Soft: 140 / 68 N·m (1.240 / 600 in.lbs.)
Max Lock Torque	125 N·m (1.100 in.lbs.)
Dimensions (L x W x H)	w/ BL4020 / BL4025: 182 x 86 x 275 mm w/ BL4040: 182 x 86 x 282 mm
Net weight	2,7 - 3,0 kg

## HP002G

### 40Vmax XGT BL Brushless Cordless 13 mm (1/2") 65 N-m (580 in.lbs.) Hammer Driver Drill

Cordless Hammer Driver Drill



- Kecepatan pengeboran palu yang lebih tinggi dibandingkan DHP484
- Desain ringkas dan ergonomis dengan panjang hanya 180 mm (7-1/8")
- Aluminum gear housing menambah kesan kokoh
- 2 pilihan kecepatan (0-600 & 0-2.200 RPM) untuk berbagai macam pemakaian pengeboran, pengencangan, dan pengeboran palu
- 0-33.000 IPM untuk pengeboran palu yang cepat pada bahan batu



XGT BL MOTOR XPT



Belt Clip, (+/-) Bit, Battery, Charger

Capacity	Steel / Wood (Auger Bit) / Wood (Self-Feed Bit) / Wood (Hole Saw) / Masonry: 13 / 38 / 38 / 51 / 13 mm (1/2 / 1-1/2 / 1-1/2 / 2 / 1/2")
Chuck Capacity	1,5 - 13 mm (1/16 - 1/2")
Impacts Per Minute	High / Low: 0 - 33.000 / 0 - 9.000 IPM
No Load Speed	High / Low: 0 - 2.200 / 0 - 600 RPM
Max Fastening Torque	Hard / Soft: 64 / 30 N-m (570 / 270 in.lbs.)
Max Lock Torque	65 N-m (580 in.lbs.)
Dimensions (L x W x H)	w/ BL4020 / BL4025: 174 x 86 x 265 mm (6-7/8 x 3-3/8 x 10-3/8") w/ BL4040: 174 x 86 x 272 mm (6-7/8 x 3-3/8 x 10-3/4") w/ BL4050F: 174 x 86 x 294 mm (6-7/8 x 3-3/8 x 11-5/8")
Net weight	2,0 - 2,6 kg (4,4 - 5,7 lbs.)



## HM002G

### 40Vmax X2 (80Vmax) XGT BL AWS AVT SOFT NO LOAD 20,9 J Demolition Hammer, SDS-MAX Bits

Cordless Demolition Hammer



- 40Vmax X2 & motor BL memberikan daya tinggi 20.0 J
- Pegangan peredam getaran memungkinkan pemakaian yang nyaman
- Anti-Vibration Technology (AVT) memastikan tingkat getaran yang sangat rendah
- Auto-Start Wireless System (AWS) dapat terhubung dengan Vacuum Cleaner kompatibel via Bluetooth
- Fungsi Soft No Load memastikan tingkat getaran rendah



XGT BL MOTOR AWS AVT SOFT NO LOAD XPT



Bull Point, Grease for bit, Side Handle, Wireless Unit (country-specific), Wireless Unit Adapter (country-specific), Battery, Charger

Impact Energy	EPTA-Procedure 05/2009: 20,9 J
Blows Per Minute	950 - 1.900 BPM
Shank Diameter	18 mm (11/16")
Dimensions (L x W x H)	w/ BL4020 / BL4025: 574 x 146 x 324 mm w/ BL4040: 574 x 146 x 324 mm w/ BL4050F: 574 x 156 x 344 mm
Net weight	12,0 - 13,3 kg

## TD001G

### 40Vmax XGT BL Brushless Cordless Wood/Bolt/T-Mode 220 N-m Impact Driver

Cordless Impact Driver



- Daya tinggi: 220 N-m
- Solusi tepat untuk kebutuhan industri dengan pemakaian tinggi
- Kemampuan luar biasa untuk pengencangan dalam tugas berat secara terus-menerus; Mampu menguasai tugas berat seperti baut atau baut kayu secara terus-menerus
- Kecepatan kerja hingga 50% lebih tinggi dibandingkan DTD171
- Pilihan mode operasi untuk berbagai pemakaian; 4 pilihan kecepatan plus 6 Assist Mode (2 T-Mode, 1 Wood Mode, 3 Bolt Mode)



XGT BL MOTOR XPT



Phillips Bit, Belt Clip, Hand Strap, Battery, Charger

Capacity	Machine Screw: M4 - M8 (5/32 - 5/16") Standard Bolt: M5 - M16 (3/16 - 5/8") High Strength Bolt: M5 - M14 (3/16 - 9/16") Coarse thread (in length): 22 - 125 mm (7/8 - 4-7/8")
Hex Shank	6,35 mm (1/4")
No Load Speed	Max / Hard / Mid / Soft / Wood / Bolt (1) / Bolt (2) / Bolt (3) / T (1) / T (2) mode: 0 - 3.700 / 3.200 / 2.100 / 1.100 / 1.800 / 2.500 / 3.700 / 3.700 / 2.400 / 3.700 RPM
Impacts Per Minute	Max / Hard / Mid / Soft / Wood / Bolt (1) / Bolt (2) / Bolt (3) / T (2) mode: 0 - 4.400 / 3.600 / 2.600 / 1.100 / 4.400 / N/A / 4.400 / 4.400 / 2.600 IPM
Max Fastening Torque	220 N-m (1.950 in.lbs.)
Fastening Torque	Hard / Mid / Soft: 170 / 50 / 20 N-m
Dimensions (L x W x H)	w/ BL4020 / BL4025: 120 x 86 x 245 mm
Net weight	1,7 - 2,0 kg

## DF002G

### 40Vmax XGT BL Brushless Cordless 13 mm (1/2") 65 N-m (580 in.lbs.) Hammer Driver Drill

#### Cordless Driver Drill



- Kecepatan pengeboran, driving, dan pengencangan yang lebih tinggi dibandingkan DDF484
- Desain ringkas dan ergonomis dengan panjang hanya 170 mm (7-1/8")
- Aluminum gear housing menambah kesan kokoh dan mewah
- 2 pilihan kecepatan (0-600 & 0-2.200 RPM) untuk berbagai macam pemakaian pengeboran dan pengencangan
- Dua lampu LED built-in dengan fungsi pre-glow dan afterglow untuk menyoroti area kerja



**XGT BL MOTOR XPT**



(+/-) Bit, Belt Clip, Battery, Charger

Capacity	Steel / Wood (Auger Bit) / Wood (Self-Feed Bit) / Wood (Hole Saw): 13 / 38 / 38 / 51 mm (1/2" / 1-1/2" / 1-1/2" / 2")
Chuck Capacity	1,5 - 13 mm (1/16 - 1/2")
No Load Speed	High / Low: 0 - 2.200 / 0 - 600 RPM
Max Fastening Torque	Hard / Soft: 64 / 30 N-m (570 / 270 in.lbs.)
Max Lock Torque	65 N-m (580 in.lbs.)
Dimensions (L x W x H)	w/ BL4020 / BL4025: 164 x 86 x 265 mm w/ BL4040: 164 x 86 x 272 mm w/ BL4050F: 164 x 86 x 294 mm
Net weight	1,9 - 2,5 kg

## DF001G

### 40Vmax XGT BL AFT Cordless 13 mm (1/2") 125 N-m (1.100 in.lbs.) Driver Drill

#### Cordless Driver Drill



- Kecepatan pengeboran luar biasa; Peningkatan kecepatan 20% atau lebih dibandingkan model sebelumnya
- Kecepatan maksimal lebih tinggi (0-2.600 RPM) pada mode tinggi untuk kecepatan pengeboran lebih tinggi dalam pemakaian light duty
- Transmisi 2 kecepatan variabel (0-650 & 0-2.600 RPM) untuk berbagai macam pemakaian pengeboran dan pengencangan
- Ukuran keseluruhan alat yang ringkas untuk memudahkan penanganan dan pengendalian



**XGT BL MOTOR AFT XPT**



Side Grip, Belt Clip, (+/-) Bit, Bit Holder, Battery, Charger

Capacity	Steel: 20 mm (13/16") Wood (Auger-Bit): 50 mm (2") Wood (Self-Feed Bit): 76 mm (3") Siding Board: 220 mm (8-5/8")
Chuck Capacity	1,5 - 13 mm (1/16 - 1/2")
No Load Speed	High / Low: 0 - 2.600 / 0 - 650 RPM
Max Fastening Torque	Hard / Soft: 140 / 68 N-m (1.240 / 600 in.lbs.)
Max Lock Torque	125 N-m (1.100 in.lbs.)
Dimensions (L x W x H)	w/ BL4020 / BL4025: 181 x 86 x 275 mm w/ BL4040: 181 x 86 x 282 mm
Net weight	2,7 - 3,0 kg

## DA001G

### 40Vmax XGT BL ADT Cordless 13 mm (1/2") Angle Drill with Keyed Chuck

#### Cordless Angle Drill



- Bobot ringan untuk mengurangi kelelahan operator
- Desain pegangan mencegah alat terlepas, juga berfungsi sebagai kaitan
- Daya tinggi yang luar biasa
- Pengeboran kecepatan tinggi mengalahkan tools motor AC
- Pengeboran tangguh bahkan untuk lubang berdiameter besar



**XGT BL MOTOR ADT XPT**



Chuck Key, Chuck Key Holder, Hex Wrench, Side Grip, Hook, Battery, Charger

Capacity	Steel: 13 mm (1/2") Wood (Self-Feed Bit) Hi: 65 mm (2-9/16") Wood (Self-Feed Bit) Lo: 118 mm (4-5/8") Wood (Hole Saw) Hi: 105 mm (4-1/8") Wood (Hole Saw) Lo: 159 mm (6-1/4") Wood (Auger-Bit): 50 mm (2")
Chuck Capacity	2 - 13 mm (1/16 - 1/2")
No Load Speed	High / Low: 0 - 1.500 / 0 - 400 RPM
Max Fastening Torque	High: 55 N-m (487 in.lbs.) Low: 136 N-m (1.210 in.lbs.)
Dimensions (L x W x H)	w/ BL4020 / BL4025: 539 x 128 x 199 mm w/ BL4040: 545 x 128 x 199 mm w/ BL4050F: 566 x 128 x 199 mm
Net weight	5,3 - 6,2 kg



# Cordless Impact Wrench

TW001G



Tersedia 3 mode waktu reaksi untuk penghentian otomatis, baik dalam mode rotasi maju dan mundur.



Sakelar pemilihan daya 4 kecepatan untuk berbagai aplikasi.



Motor buatan Makita menghasilkan torsi maksimal 1.800 N-m.

**TW001G**

**40Vmax XGT BL Cordless 3/4" (19 mm) 1.800 N-m (1.330 ft.lbs.) Impact Wrench, Reverse Rotation Auto Stop Mode**

**Cordless Impact Wrench**



- Torsi lebih tinggi dan lebih ringkas dibandingkan DTW1001
- Torsi tinggi dengan desain ringkas untuk memudahkan penanganan dan pengendalian
- Pemilih impact power elektronik 4 tingkat untuk berbagai pemakaian
- 3 mode waktu reaksi untuk penghentian otomatis, baik untuk pengencangan maupun pelonggaran
- Sakelar pemicu dengan mode kecepatan penuh mengurangi kelelahan pada tangan dan jari



Belt Clip, Battery, Charger

Fastening Capacities	Standard Bolt: M12 - M36 (1/2 - 1-7/16") High Strength Bolt: M10 - M27 (3/8 - 1-1/16")
Square Drive	19 mm (3/4")
Impacts Per Minute	Max / Hard / Mid / Soft: 0 - 2.500 / 2.400 / 2.200 / 1.900 IPM
No Load Speed	Max / Hard / Mid / Soft: 0 - 1.800 / 1.400 / 1.150 / 950 RPM
Max Fastening Torque	1.800 N-m (1.330 ft.lbs.)
Dimensions (L x W x H)	w/ BL4020 / BL4025: 217 x 94 x 297 mm w/ BL4040: 217 x 94 x 303 mm
Net weight	3,9 - 4,2 kg


## Cordless Impact Wrench

TW007G / TW008G



TW007G

C ring



TW008G

Pin detent



## TW007G / TW008G

Cordless Impact Wrench

40Vmax XGT BL Cordless 1/2" (12.7 mm) 730 N-m (540 ft.lbs.) Impact Wrench, Forward/Reverse Rotation Auto Stop Mode



- Torsi lebih tinggi: 730 N-m
- Torsi pemutar mur lebih tinggi: 1.100 NM
- 3 mode waktu reaksi untuk penghentian otomatis, baik untuk pengencangan maupun pelonggaran
- Sakelar pemicu dengan mode kecepatan penuh mengurangi kelelahan pada tangan dan jari
- Desain ringkas dengan panjang hanya 170 mm



XGT BL MOTOR XPT



Belt Clip, Battery, Charger

Fastening Capacities	Standard Bolt: M10 - M24 (3/8 - 1")
	High Strength Bolt (Grade 10.9): M10 - M16 (3/8 - 5/8")
Square Drive	High Strength Bolt (Grade F10T): M12, M16 (7/16, 5/8")
	12,7 mm (1/2")
Impacts Per Minute	Max / Hard / Mid / Soft:
	0 - 2.900 / 2.700 / 1.900 / 1.200 IPM
No Load Speed	Max / Hard / Mid / Soft:
	0 - 2.300 / 1.900 / 1.200 / 600 RPM
Max Fastening Torque	760 N-m (560 ft.lbs.)
	w/ BL4020 / BL4025: 170 x 86 x 285 mm
Dimensions (L x W x H)	w/ BL4040: 170 x 86 x 291 mm
	w/ BL4050F: 170 x 86 x 312 mm
Net weight	2,7 - 3,3 kg

## TW004G

Cordless Impact Wrench

40Vmax XGT BL Cordless 1/2" (12,7 mm) 350 N-m (260 ft.lbs.) Impact Wrench, Forward/Reverse Rotation Auto Stop Mode



- Kecepatan motor lebih tinggi pada putaran dengan beban sehingga memberikan torsi lebih tinggi dibandingkan DTW300 dan DTW301
- Pemilih impact power elektronik 4 tingkat untuk berbagai pemakaian
- 3 mode waktu reaksi untuk penghentian otomatis, baik untuk pengencangan maupun pelonggaran
- Sakelar pemicu dengan mode kecepatan penuh mengurangi kelelahan pada tangan dan jari
- Desain ringkas dengan panjang hanya 144 mm



XGT BL MOTOR XPT



Belt Clip, Battery, Charger

Fastening Capacities	Standard Bolt: M10 - M20 (3/8 - 3/4")
	High Strength Bolt: M10 - M16 (3/8 - 5/8")
Square Drive	High Strength Bolt (Grade F10T): M12, M16 (7/16, 5/8")
	12,7 mm (1/2")
Impacts Per Minute	Max / Hard / Mid / Soft:
	0 - 4.000 / 3.400 / 2.600 / 1.800 IPM
No Load Speed	Max / Hard / Mid / Soft:
	0 - 3.200 / 2.600 / 1.800 / 1.000 RPM
Max Fastening Torque	350 N-m (260 ft.lbs.)
	w/ BL4020 / BL4025:
Dimensions (L x W x H)	144 x 86 x 248 mm
	w/ BL4040: 144 x 86 x 253 mm
Net weight	1,9 - 2,2 kg


# Cordless Angle Grinder

GA037G / GA038G



### Keseimbangan gravitasi lebih baik

Sangat mudah bermanuver pada sudut apa pun karena titik pusat gravitasi dapat digenggam



### Active Feedback sensing Technology

Pembatas torsi akan membatasi motor jika alat tiba-tiba terkunci

### AWS Auto-start Wireless System

Fungsi aktivasi nirkabel memungkinkan operasi yang mulus dan nyaman. Dengan menghubungkan cleaner ke alat yang kompatibel, cleaner akan berjalan secara otomatis sesuai operasi tombol pada alat.



Unit nirkabel kompatibel dengan semua alat yang didukung



### Rem elektrik

Rem elektrik akan aktif setelah alat dimatikan.

## GA037G / GA038G

Cordless Angle Grinder

40Vmax XGT BL AWS AFT Cordless A Cordless Angle Grinder, Anti-Restart Function, Electric Brake, Large Trigger Switch



- Ringan sehingga semakin mudah dioperasikan
- Daya tinggi pada beban tinggi
- Auto-Start Wireless System (AWS) dapat terhubung dengan Vacuum Cleaner kompatibel via Bluetooth
- Active Feedback sensing Technology (AFT)
- Rem elektrik menghentikan roda gerinda dalam 4,5 detik atau kurang, untuk produktivitas maksimal dan tingkat keselamatan operator yang lebih tinggi



Toolless Wheel Cover, Side Grip, Lock Nut Wrench, Vibration Proof Grip (country-specific), Wireless Unit (country-specific), Interchangeable Adapter ADP10 (country-specific), Toolless Lock Nut (country-specific), Battery, Charger

Wheel Diameter	GA037G: 180 mm (7") GA038G: 230 mm (9")
Hole Diameter	22,23 mm (7/8")
No Load Speed	GA037G: 7.800 RPM GA038G: 6.600 RPM
Circumference of Grip Portion	154 mm (6-1/16")
Dimensions (L x W x H)	GA037G: w/ BL4025: 497 x 200 x 156 mm w/ BL4040: 509 x 200 x 164 mm w/ BL4050F: 535 x 200 x 180 mm GA038G: w/ BL4025: 497 x 250 x 156 mm w/ BL4040: 509 x 250 x 164 mm w/ BL4050F: 535 x 250 x 180 mm
Net weight	GA037G: 4,4 - 5,4 kg GA038G: 4,6 - 7,4 kg


## GA035G / GA036G

Cordless Angle Grinder

40Vmax XGT BL AFT Cordless Angle Grinder, Anti-Restart Function, Electric Brake, Slide Switch Lock-On

### GA035G

Slide switch



### GA036G

Paddle Switch



- Kinerja dan efisiensi luar biasa setara dengan gerinda listrik kelas 1.000 W
- Solusi tepat untuk kebutuhan industri dengan pemakaian tinggi
- Kemampuan luar biasa untuk pekerjaan beban berat secara terus-menerus
- Toolless wheel cover baru memungkinkan penyesuaian sudut dan pemasangan/pelepasan wheel cover dengan cepat dan mudah
- Active Feedback sensing Technology (AFT) membatasi motor jika kecepatan putar tiba-tiba melambat atau roda terpaksa berhenti



Grinding Wheel, Toolless Wheel Cover, Side Grip, Lock Nut Wrench, Battery, Charger

Wheel Diameter	150 mm (6")
Hole Diameter	22,23 mm (7/8")
No Load Speed	8.500 RPM
Circumference of Grip Portion	GA035G: 146 mm (5-3/4") GA036G: 151 mm (5-15/16")
Dimensions (L x W x H)	w/ BL4040: 410 x 171 x 168 mm w/ BL4020 / BL4025: 398 x 171 x 156 mm
Net weight	3,0 - 3,7 kg



## Slide Switch Type

XGT BL AFT (E) XPT

	GA003G	GA005G
Wheel Diameter	100 mm (4")	125 mm (5")
Hole Diameter	16 mm (5/8")	22.23 mm (7/8")
No Load Speed	8,500 RPM	8,500 rpm
Vibration Level Surface Grinding w/ Normal Side Grip:	5.0 m/s <sup>2</sup>	6.5 m/s <sup>2</sup>
Sound Pressure Level / Sound Power Level	81 dB(A) / 92 dB(A)	81 dB(A) / 92 dB(A)
Dimensions (L x W x H) with/ BL4025:	398 x 117 x 150 mm	398 x 140 x 156 mm
with/ BL4040:	410 x 117 x 162 mm	410 x 140 x 168 mm
Net weight	2.8 - 3.3 kg	2.9 - 3.6 kg

XGT BL AWS AFT (E) XPT (S)

	GA021G	GA022G	GA023G
Wheel Diameter	100 mm (4")	115 mm (4-1/2")	125 mm (5")
Hole Diameter	16 mm (5/8")	22.23 mm (7/8")	22.23 mm (7/8")
No Load Speed	3,000 - 8,500 RPM	3,000 - 8,500 RPM	3,000 - 8,500 RPM
Vibration Level Surface Grinding w/ Normal Side Grip:	5.0 m/s <sup>2</sup>	5.5 m/s <sup>2</sup>	6.5 m/s <sup>2</sup>
Sound Pressure Level / Sound Power Level	81 dB(A) / 92 dB(A)	81 dB(A) / 92 dB(A)	81 dB(A) / 92 dB(A)
Dimensions (L x W x H) with/ BL4025:	413x117x150 mm	413x130x156 mm	413x140x156 mm
with/ BL4040:	425x117x162 mm	425x130x168 mm	425x140x168 mm
Net weight	2.8 - 3.4 kg	3.0 - 3.6 kg	3.0 - 4.4 kg

XGT BL AWS AFT XPT (S)

	GA024G	GA025G	GA026G
Wheel Diameter	100 mm (4")	115 mm (4-1/2")	125 mm (5")
Hole Diameter	16 mm (5/8")	22.23 mm (7/8")	22.23 mm (7/8")
No Load Speed	3,000 - 8,500 RPM	3,000 - 8,500 RPM	3,000 - 8,500 RPM
Vibration Level Surface Grinding w/ Normal Side Grip:	5.0 m/s <sup>2</sup>	5.5 m/s <sup>2</sup>	6.5 m/s <sup>2</sup>
Sound Pressure Level / Sound Power Level	81 dB(A) / 92 dB(A)	81 dB(A) / 92 dB(A)	81 dB(A) / 92 dB(A)
Dimensions (L x W x H) with/ BL4025:	413x117x146 mm	413x130x152 mm	413x140x152 mm
with/ BL4040:	425x117x158 mm	425x130x165 mm	425x140x165 mm
Net weight	2.8 - 3.4 kg	2.9 - 3.5 kg	2.9 - 4.4 kg

Soft Start
 Dust Collection
 Carrying Case

Standard equipment : GA003G, GA005G : Grinding Wheel, Toolless Wheel Cover / Wheel Cover, Side Grip, Lock Nut Wrench, Battery, Charger

Standard equipment : GA021G, GA022G, GA023G, GA024G, GA025, GA026 : Grinding Wheel, Toolless Wheel Cover, Side Grip, Lock Nut Wrench, Battery, Charger



## Paddle Switch Type

XGT BL AFT (E) XPT

	GA011G	GA013G
Wheel Diameter	100 mm (4")	125 mm (5")
Hole Diameter	16 mm (5/8")	22.23 mm (7/8")
No Load Speed	8,500 RPM	8,500 RPM
Vibration Level Surface Grinding w/ Normal Side Grip:	4.5 m/s <sup>2</sup>	6.0 m/s <sup>2</sup>
Sound Pressure Level / Sound Power Level	81 dB(A) / 92 dB(A)	82 dB(A) / 93 dB(A)
Dimensions (L x W x H) with/ BL4025:	398 x 117 x 150 mm	398 x 140 x 156 mm
with/ BL4040:	410 x 117 x 162 mm	410 x 140 x 168 mm
Net weight	2.8 - 3.4 kg	3.0 - 3.6 kg

XGT BL AWS AFT (E) XPT (S)

	GA027G	GA028G	GA029G
Wheel Diameter	100 mm (4")	115 mm (4-1/2")	125 mm (5")
Hole Diameter	16 mm (5/8")	22.23 mm (7/8")	22.23 mm (7/8")
No Load Speed	3,000 - 8,500 RPM	3,000 - 8,500 RPM	3,000 - 8,500 RPM
Vibration Level Surface Grinding w/ Normal Side Grip:	4.5 m/s <sup>2</sup>	5.0 m/s <sup>2</sup>	6.0 m/s <sup>2</sup>
Sound Pressure Level / Sound Power Level	81 dB(A) / 92 dB(A)	81 dB(A) / 92 dB(A)	82 dB(A) / 93 dB(A)
Dimensions (L x W x H) with/ BL4025:	413x117x150 mm	413x130x156 mm	413x140x156 mm
with/ BL4040:	425x117x162 mm	425x130x168 mm	425x140x168 mm
Net weight	2.9 - 3.4 kg	3.0 - 3.6 kg	3.0 - 4.5 kg

XGT BL AWS AFT XPT (S)

	GA030G	GA031G	GA032G
Wheel Diameter	100 mm (4")	115 mm (4-1/2")	125 mm (5")
Hole Diameter	16 mm (5/8")	22.23 mm (7/8")	22.23 mm (7/8")
No Load Speed	3,000 - 8,500 RPM	3,000 - 8,500 RPM	3,000 - 8,500 RPM
Vibration Level Surface Grinding w/ Normal Side Grip:	4.5 m/s <sup>2</sup>	5.0 m/s <sup>2</sup>	6.0 m/s <sup>2</sup>
Sound Pressure Level / Sound Power Level	81 dB(A) / 92 dB(A)	81 dB(A) / 92 dB(A)	82 dB(A) / 93 dB(A)
Dimensions (L x W x H) with/ BL4025:	413x117x146 mm	413x130x152 mm	413x140x152 mm
with/ BL4040:	425x117x158 mm	425x130x165 mm	425x140x165 mm
Net weight	2.8 - 3.4 kg	2.9 - 3.6 kg	3.0 - 4.4 kg

Soft Start
 Dust Collection
 Carrying Case

Standard equipment : Grinding Wheel, Toolless Wheel Cover, Side Grip, Lock Nut Wrench, Battery, Charger

## Daftar Perbandingan Produk

Model No.			No load speed (RPM)	Switch	AWS	BL motor	AFT	Brake	XPT	Anti-restart function
100mm	115mm	125mm								
GA021G	GA022G	GA023G	3.000 - 8.500	Slide	●	●	●	●	●	●
GA024G	GA025G	GA026G	3.000 - 8.500	Slide	●	●	●		●	●
GA003G		GA005G	8.500	Slide		●	●	●	●	●
GA027G	GA028G	GA029G	3.000 - 8.500	Paddle	●	●	●	●	●	●
GA030G	GA031G	GA032G	3.000 - 8.500	Paddle	●	●	●		●	●
GA011G		GA013G	8.500	Paddle		●	●	●	●	●

### CS002G

Cordless Metal Cutter

40Vmax XGT BL Cordless 185 mm (7-1/4") Metal Cutter with Dust Box, Electric Brake, Twin LED Lights



Blade Diameter	185 mm (7-1/4")
Max Cutting Capacity	0": 67 mm (2-5/8")
No Load Speed	3.500 RPM
Dimensions (L x W x H)	350 x 232 x 270 mm (13-3/4 x 9-1/8 x 10-5/8")
Net weight	4,3 - 4,9 kg (9,5 - 10,8 lbs.)



new

TCT Saw Blade, Hex Wrench, Safety Goggles, Guide Rule (country-specific), Battery, Charger

### PB002G

Cordless Impact Wrench

40Vmax XGT BL Cordless Portable Band Saw



Capacity	Square: 127 x 127 mm (5 x 5")
Blade Speed	0 - 3,2 m/min (0 - 630 ft/min)
Blade Size	Length: 1.140 mm (45") Width: 13 mm (1/2") Thickness: 0,5 mm (0,02")
Dimensions (L x W x H)	510 x 218 x 314 mm (20 x 8-5/8 x 12-3/8")
Net weight	6,5 - 7,1 kg (14,3 - 15,7 lbs.)



new

Band Saw Blade, Hex Wrench, Battery, Charger

## Cordless Power Cutter

### CE001G

## Kekuatan memotong berbagai material



Baterai XGT 80Vmax (40V X2) dan motor Brushless untuk meningkatkan efisiensi pemotongan



Membuat potongan tunggal hingga 127 mm dalam berbagai bahan



Lampu LED untuk meningkatkan visibilitas dan Wet Guard: Performa tahan air yang luar biasa



Active Feedback-sensing Technology (AFT®) yang mematikan motor jika kecepatan putaran tiba-tiba melambat atau roda dipaksa berhenti

### CE001G

40Vmax X2 (80Vmax) XGT BL Cordless 355 mm Power Cutter, Electric Brake

Cordless Power Cutter

new

- Kinerja tahan air yang tinggi
- Dikombinasikan dengan desain tahan air (WET GUARD) yang dapat dioperasikan bahkan di dalam air, aman bahkan jika tidak sengaja terciprat air saat cuaca hujan tiba-tiba selama pekerjaan di luar ruangan atau pekerjaan basah
- Dengan memasang dua baterai berdaya tinggi di ujungnya, untuk pertama kalinya efisiensi kerja akan setara dengan mesin pemotong 75,6 mL
- Dilengkapi dengan rumah tahan getaran yang mengurangi getaran selama pemotongan



Wrench, Coupling Sleeve, Battery, Charger


Wheel Diameter	355 mm (14")
Max Cutting Capacity	127 mm (5")
No Load Speed	5.300 RPM
Dimensions (L x W x H)	786 x 272 x 433 mm
Net weight	12,3 - 12,9 kg

## Cordless Slide Compound Miter Saw

LS004G / LS003G / LS002G




Lampu LED memastikan garis potong yang tepat



Sudut kemiringan 48° ke kiri dan ke kanan



Desain rel ke depan memungkinkan alat ditempatkan sejajar dengan dinding



Meja tambahan dapat diperpanjang membantu menstabilkan pemotongan

### LS004G

Cordless Slide Compound Miter Saw

### 40Vmax XGT BL AWS Cordless 260 mm (10-1/4") Slide Compound Miter Saw, LED Light



new

- Tenaga tinggi dari motor 40Vmax BL memungkinkan pemotongan dengan cepat, setara dengan corded slide compound miter saw
- Tombol aktivasi vacuum cleaner untuk meningkatkan kenyamanan
- Lampu LED dengan fungsi penyesuaian garis potong
- Auto-Start Wireless System (AWS) dapat terhubung dengan Vacuum Cleaner kompatibel via Bluetooth
- Desain rel ke depan memungkinkan alat ditempatkan sejajar dinding untuk memaksimalkan ruang kerja



XGT BL AWS DXT



TCT Saw Blade, Dust Bag, Triangular Rule, Vertical Vise, Hex Wrench, Battery, Charger, Wireless Unit

Blade Diameter	260 mm (10-1/4")
Hole Diameter	25.4, 30 mm (1, 1-3/16")
Miter Angle	60° L 60° R
Bevel Angle	48° L 48° R
Max Cutting Capacity	0° Miter: 91 x 279 mm (3-5/8 x 11") 45° Miter, L/R: 91 x 197 mm (3-5/8 x 7-3/4")
No Load Speed	3.600 RPM
Dimensions (L x W x H)	805 x 644 x 660 mm
Net weight	26,6 - 27,2 kg

### LS003G

Cordless Slide Compound Miter Saw

### 40Vmax XGT BL AWS Cordless 305 mm (12") Slide Compound Miter Saw, LED Light



- Tenaga tinggi dari motor 40Vmax BL memungkinkan pemotongan dengan cepat, setara dengan corded slide compound miter saw
- Tombol aktivasi vacuum cleaner untuk meningkatkan kenyamanan
- Lampu LED dengan fungsi penyesuaian garis potong
- Auto-Start Wireless System (AWS) dapat terhubung dengan Vacuum Cleaner kompatibel via Bluetooth
- Desain rel ke depan memungkinkan alat ditempatkan sejajar dinding untuk memaksimalkan ruang kerja



XGT BL AWS DXT



TCT Saw Blade, Dust Bag, Triangular Rule, Vertical Vise, Hex Wrench, Battery, Charger, Wireless Unit

Blade Diameter	305 mm (12")
Hole Diameter	25.4, 30 mm (1, 1-3/16")
Miter Angle	60° L 60° R
Bevel Angle	48° L 48° R
Max Cutting Capacity	0° Miter: 107 x 363 mm (4-1/4 x 14-1/4") 45° Miter, L/R: 107 x 255 mm (4-1/4 x 10")
No Load Speed	3.600 RPM
Dimensions (L x W x H)	898 x 690 x 725 mm
Net weight	30,5 - 31,1 kg

### LS002G

Cordless Slide Compound Miter Saw

### 40Vmax XGT BL AWS Cordless 216 mm (8-1/2") Slide Compound Miter Saw, LED Light



- Pengumpulan debu lebih efisien
- Tombol aktivasi vacuum cleaner (via AWS) memudahkan pembersihan setelah bekerja
- Desain rel ke depan memungkinkan alat ditempatkan sejajar dinding untuk memaksimalkan ruang kerja
- Lampu LED memastikan garis potong yang tepat
- Meja tambahan dapat diperpanjang untuk membantu menstabilkan pemotongan bahan dengan ukuran yang panjang



XGT BL AWS DXT



TCT Saw Blade, Dust Bag, Triangular Rule, Vertical Vise, Hex Wrench, Battery, Charger

Blade Diameter	216 mm (8-1/2")
Hole Diameter	25.4, 30 mm (1, 1-3/16")
Miter Angle	60 / 60° L 60, 60° R
Bevel Angle	48 / 48° L 48, 48° R
Max Cutting Capacity	0° Miter: 70 x 312 mm (2-3/4 x 12-1/4") 45° Miter, L/R: 70 x 220 mm (2-3/4 x 8-5/8")
No Load Speed	4.800 RPM
Dimensions (L x W x H)	702 x 551 x 557 mm
Net weight	16,4 - 17,0 kg

## Cordless Rear Handle Saw

RS002G / RS001G

# Ringan sehingga semakin mudah dioperasikan



### Dapat dihubungkan ke penyedot debu

Hubungkan penyedot debu MAKITA ke alat Anda.



### Pengait yang lebar

- Kompatibel dengan lebar hingga 66 mm.
- Mesin dapat digantung, misalnya, 2x kayu atau balok-l (dengan lebar 64 mm), dll.

### RS002G

Cordless Slide Compound Miter Saw

### 40Vmax XGT BL AWS Cordless 260 mm (10-1/4") Magnesium Rear Handle Saw, Electric Brake, Soft Start



- Ringan sehingga semakin mudah dioperasikan
- Baterai 40Vmax XGT dan motor BL memberikan putaran 4.000 RPM untuk pemotongan dan pembelahan dengan cepat
- Memotong 4x bahan dalam sekali lintas; mata gergaji kiri
- Auto-Start Wireless System (AWS) dapat terhubung dengan Vacuum Cleaner kompatibel via Bluetooth
- Motor BL tidak memakai carbon brush, memungkinkan motor BL tidak cepat panas dan lebih efisien, sehingga usia pakai lebih lama

Blade Diameter	260 mm (10-1/4")
Hole Diameter	15.88, 25, 25.4, 30 mm (5/8, 1, 1, 1-3/16")
Max Cutting Capacity	0°: 95 mm (3-3/4") 45°: 70 mm (2-3/4") 56°: 54,5 mm (2-1/8")
No Load Speed	4.000 RPM
Dimensions (L x W x H)	489 x 193 x 309 mm
Net weight	5,7 - 6,3 kg



TCT Saw Blade, Grip, Offset Wrench, Battery, Charger

### RS001G

Cordless Rear Handle Saw

### 40Vmax XGT BL ADT Cordless 185 mm (7-1/4") Magnesium Rear Handle Saw, Electric Brake, Soft Start



- Ringan sehingga semakin mudah dioperasikan
- Baterai 40Vmax XGT dan motor BL memberikan putaran 6.400 RPM untuk pemotongan dan pembelahan dengan cepat
- Memotong 3X bahan dalam sekali lintas; mata gergaji kiri
- Motor BL tidak memakai carbon brush, memungkinkan motor BL tidak cepat panas dan lebih efisien, sehingga usia pakai lebih lama
- Kapasitas pemotongan besar (65 mm pada 90°) dan rentang sudut kemiringan luas (0° - 53°) dengan pemberhentian positif di 22,5° dan 45°

Blade Diameter	185 mm (7-1/4")
Hole Diameter	15.88, 19, 20, 30 mm (5/8, 3/4, 13/16, 1-3/16")
Max Cutting Capacity	0°: 65 mm (2-9/16") 45°: 45 mm (1-3/4") 53°: 38 mm (1-1/2")
No Load Speed	6.400 RPM
Dimensions (L x W x H)	446 x 196 x 270 mm
Net weight	5,0 - 5,6 kg



TCT Saw Blade, Offset Wrench, Guide Rule (country-specific), Battery, Charger

## HS011G

## 40Vmax XGT BL AWS Cordless 260 mm (10-1/4") / 270 mm (10-5/8") Magnesium Circular Saw, Electric Brake, Soft Start, Twin LED Light

## Cordless Circular Saw

new

- Kelas perlindungan tahan debu dan tahan air IP56. Aman bahkan jika tiba-tiba hujan selama pekerjaan di luar ruangan
- Kapasitas pemotongan besar 101 mm dalam satu lintasan
- Alat ini mendukung pemotongan sekali pakai untuk bahan tebal seperti kayu persegi 90 mm dengan kapasitas pemotongan hingga 97 mm (pada sudut kanan)
- HS011G merekomendasikan penggunaan baterai BL4050F dengan spesifikasi output yang tinggi



XGT BL MOTOR AWS (BRAKE) XPT



TCT Saw Blade, Sub Base, Hex Wrench, Battery, Charger

Blade Diameter	260 - 270 mm (10-1/4 - 10-5/8")
Max Cutting Capacity	0°: 97 - 101 mm (3-13/16 - 4") 45°: 68 - 71 mm (2-11/16 - 2-13/16")
No Load Speed	3.500 RPM
Dimensions (L x W x H)	453 x 196 x 336 mm
Net weight	5,5 - 6,1 kg

## HS009G / HS010G

## 40Vmax XGT BL AWS Cordless 235 mm (9-1/4") Magnesium Circular Saw, Electric Brake, Soft Start, Twin LED Light

## Cordless Circular Saw

new

- Ringan dan berdaya tinggi
- Kapasitas pemotongan besar (85 mm pada 90°) dan kapasitas kemiringan (-1° - 60°) dengan pemberhentian positif pada 45°
- Lampu kerja LED dengan fungsi pre-glow dan after glow
- Auto-Start Wireless System (AWS) - terhubung ke ekstraktor debu yang kompatibel dengan Bluetooth. Ekstraktor debu secara otomatis berjalan saat sakelar menyala
- Permulaan yang lembut dan kontrol kecepatan konstan



XGT BL MOTOR AWS (BRAKE) XPT



TCT Saw Blade, Sub Base, Hex Wrench, Wireless Unit (country-specific), Battery, Charger

Blade Diameter	235 mm (9-1/4")
Max Cutting Capacity	0°: 85 mm (3-3/8") 45°: 61 mm (2-3/8") 60°: 44 mm (1-3/4")
No Load Speed	4.000 RPM
Dimensions (L x W x H)	HS009G: 413 x 196 x 316 mm HS010G: 430 x 224 x 316 mm
Net weight	5,6 - 6,2 kg

## HS003G / HS004G

## 40Vmax XGT BL AWS ADT Cordless 190/185 mm (7-1/2" / 7-1/4") Magnesium Circular Saw, Electric Brake, Soft Start, Twin LED Light

## Cordless Circular Saw

new

- Ringan dan berdaya tinggi
- Baterai 40Vmax XGT Li-Ion dan motor BL memberikan keseimbangan yang tepat antara daya tinggi dan bobot ringan yang memudahkan bermanuver, setara dengan corded tools
- Motor BL memberikan putaran 6.000 RPM untuk pemotongan dengan cepat
- Motor BL tidak memakai carbon brush, memungkinkan motor BL tidak cepat panas dan lebih efisien, sehingga usia pakai lebih lama
- Kapasitas pemotongan besar (68,5 mm pada 90°)



XGT BL MOTOR AWS ADT (BRAKE) XPT



TCT Saw Blade, Dust Nozzle, Hex Wrench, Guide Rule (HS004G), Battery, Charger

Blade Diameter	190 / 185 mm (7-1/2" / 7-1/4")
Max Cutting Capacity	0°: 68,5 / 66 mm (2-11/16" / 2-5/8") 45°: 47,5 / 45,5 mm (1-7/8" / 1-13/16") 56°: 35,5 / 34 mm (1-3/8" / 1-5/16")
No Load Speed	6.000 RPM
Dimensions (L x W x H)	HS003G : w/ BL4020 / BL4025: 316 x 200 x 290 mm w/ BL4040: 331 x 200 x 290 mm HS004G : w/ BL4020 / BL4025: 322 x 210 x 290 mm w/ BL4040: 337 x 210 x 290 mm
Net weight	HS003G: 4,1 - 4,4 kg HS004G : 4,4 - 4,7 kg



Daya besar  
untuk memotong  
dengan cepat

## SP001G

## 40Vmax XGT BL Cordless 165 mm (6-1/2") Plunge Cut Saw

## Cordless Plunge Cut Saw

new

- Auto-start Wireless System (AWS) terhubung ke penyedot debu via Bluetooth
- BL Motor dikontrol secara elektronik untuk mengoptimalkan penggunaan energi baterai pada waktu pengoperasian yang lebih lama
- eXtreme Protection Technology (XPT) dirancang untuk meningkatkan ketahanan terhadap debu dan air untuk pengoperasian dalam kondisi yang keras
- Terdapat fitur elektronik soft start untuk permulaan yang mulus



XGT BL MOTOR AWS (BRAKE) XPT



TCT Saw Blade, Hex Wrench, Wireless Unit (country-specific), Battery, Charger

Wheel Diameter	165 mm (6-1/2")
Blade Diameter	165 mm (6-1/2")
Hole Diameter	20 mm (13/16")
Bevel Capacity	-1 - 48°
Max Cutting Capacity	0°: 56 mm (2-3/16") 45°: 40 mm (1-9/16") 48°: 38 mm (1-1/2")
No Load Speed	2.500 - 4.900 RPM
Dimensions (L x W x H)	347 x 221 x 271 mm
Net weight	4,4 - 5,0 kg



## JR001G 40Vmax XGT BL Brushless Cordless Recipro Saw

Cordless Recipro Saw

- Motor brushless berdaya tinggi dengan desain yang ringkas
- Daya tinggi dari motor BL yang dirancang khusus untuk baterai XGT
- Perlindungan dari debu dan hujan, kelas perlindungan tahan debu / tahan air IP56
- Kecepatan potong baja meningkat sekitar 70% dan kecepatan pemotongan kayu meningkat sekitar 40% (dibandingkan dengan mesin konvensional Makita)
- Penggantian pisau tanpa alat



**XGT BL MOTOR XPT**



Recipro Saw Blades, Charger, Battery

Length of Stroke	32 mm (1-1/4")
Strokes Per Minute	High / Low: 0 - 3.000 / 0 - 2.300 SPM
Capacity	Pipe / Wood: 130 / 255 mm (5-1/8" / 10")
Dimensions (L x W x H)	w/ BL4020 / BL4025: 457 x 88 x 233 mm w/ BL4040: 472 x 88 x 239 mm
Net weight	4,2 - 4,5 kg (9,3 - 9,9 lbs.)

## JR002G 40Vmax XGT BL AVT Cordless Recipro Saw

Cordless Recipro Saw

**new**

- Motor brushless berdaya tinggi mendukung pekerjaan dengan beban berat
- Perlindungan dari debu dan hujan, kelas perlindungan tahan debu / tahan air IP56
- Kecepatan potong besi meningkat sekitar 50% dan kecepatan potong kayu meningkat sekitar 25% (dibandingkan dengan mesin konvensional Makita)
- Dilengkapi dengan counterweight/penyeimbang untuk mengurangi nilai getaran hingga 50%
- Penggantian pisau tanpa alat



**XGT BL MOTOR AVT XPT**



Recipro Saw Blades, Charger, Battery

Length of Stroke	32 mm (1-1/4")
Strokes Per Minute	0 - 3.000 SPM
Capacity	Pipe / Wood: 130 / 255 mm (5-1/8" / 10")
Dimensions (L x W x H)	w/ BL4020 / BL4025: 436 x 97 x 250 mm
Net weight	4,6 - 5,2 kg (10,1 - 11,5 lbs.)



## RT001G 40Vmax XGT BL AWS Cordless 6 mm (1/4"), 8 mm (3/8") Variable Speed Trimmer with Dual LED Lights

Cordless Trimmer

**new**

- Tombol kontrol kecepatan variabel (10.000 - 31.000 RPM) untuk menyesuaikan kecepatan dengan aplikasi
- Dua lampu kerja LED untuk visibilitas yang lebih baik
- Sistem penyesuaian kedalaman halus rack-and-pinion untuk pengaturan yang lebih presisi
- Alas/dasar terbuat dari aluminium untuk meningkatkan daya tahan dan akurasi yang lebih tinggi



**XGT BL MOTOR AWS XPT**



Collet Cone, Trimmer Base Assembly, Straight Guide Assembly, Templet Guide (country-specific), Wrench, Trimmer Guide (country-specific), Dust Nozzle, Tilt Base Assembly (country-specific), Offset Base Assembly (country-specific), Plunge Base Assembly (country-specific), Battery, Charger

Collet Capacity	6, 8 mm or 1/4 - 3/8"
No Load Speed	10.000 - 31.000 RPM
Plunge Capacity	w/ Trimmer Base: 0 - 40 mm (0 - 1-9/16") w/ Plunge Base: 0 - 35 mm (0 - 1-3/8")
Dimensions (L x W x H)	w/ BL4020 / BL4025: 126 x 89 x 245 mm w/ BL4040: 141 x 89 x 261 mm
Net weight	2,2 - 2,5 kg

Collet Cone, Trimmer Base Assembly, Straight Guide Assembly, Templet Guide (country-specific), Wrench, Trimmer Guide (country-specific), Dust Nozzle, Tilt Base Assembly (country-specific), Offset Base Assembly (country-specific), Plunge Base Assembly (country-specific), Battery, Charger

### PV001G

Cordless Polisher



**new**

- Dilengkapi dengan motor brushless berdaya tinggi dan bantalan berdiameter besar
- Kelas perlindungan tahan air IPX6, aman bahkan dalam hujan atau air saat bekerja di luar ruangan
- Daya poles yang sangat baik dan getaran rendah dengan aksi tunggal (hanya rotasi)
- Kecepatan rotasi stabil bahkan ketika beban diterapkan



**XGT BL MOTOR XPT**



Loop Handle / Side Handle, Hex Wrench, Battery, Charger

Capacity	Pad: 180 mm
No Load Speed	0 - 2.200 RPM
Dimensions (L x W x H)	w/ BL4050F: 547 x 198 x 196 mm
Net weight	3,1 - 3,8 kg

### PT001G

Cordless Pin Nailer



**new**

- Dilengkapi dengan motor brushless berdaya tinggi
- Dapat digerakkan secara vertikal dan horizontal
- Efisiensi kerja lebih ditingkatkan, respon pengoperasian meningkat sekitar 20%
- Bodi yang ringkas dan ringan dengan panjang total 226 mm dengan kemampuan manuver yang sangat baik
- Kelas perlindungan tahan air "IP56" yang melindungi unit dari hujan dan debu selama bekerja



**XGT BL MOTOR XPT**



Nose Adapter, Safety Goggles, Belt Clip, Hex Wrench, Battery, Charger

Capacity	Length:
	15, 18, 25, 30, 35 mm
	(5/8, 11/16, 1, 1-3/16, 1-3/8")
	Dia.: 0.6 mm (1/32")
	Gauge: 23 Ga
Magazine Capacity	120
Dimensions (L x W x H)	218 x 86 x 226 mm
Net weight	2,4 - 3,0 kg

### FN001G

Cordless Brad Nailer



- Desain ringkas sehingga mudah dioperasikan
- Penghubung bagian atas dirancang untuk penempatan paku dengan mudah; Lubang penembak paku terletak di tengah lengan, memungkinkan penempatan paku dengan akurat
- Penghubung bagian atas anti-slip menggenggam benda kerja dengan kuat pada posisi apa pun, memungkinkan pemasangan paku pada chamfer strip
- Nose adapter ramping dengan ujung kecil dapat dimasukkan ke dalam ceruk selebar hingga 6 mm



**XGT BL MOTOR XPT**



Safety Goggles, Nose Adapter, Hex Wrench, Belt Clip, Battery, Charger

Capacity	Length: 15, 20, 25, 30, 35, 40 mm
	(5/8, 3/4, 1, 1-3/16, 1-3/8, 1-5/8")
	Gauge: 18 Ga
Magazine Capacity	100
Shot q'ty on a single full battery charge	w/ BL4025: 5.000
Dimensions (L x W x H)	w/ BL4020 / BL4025: 265 x 86 x 243 mm
	w/ BL4050F: 291 x 86 x 263 mm
Net weight	2,6 - 3,2 kg

### MP001G

Cordless Inflator



**new**

- Peningkatan jumlah pembuangan udara, secara drastis mempersingkat waktu untuk mengembangkan ban besar traktor, truk, dan lainnya
- Ideal untuk mengembungkan ban mobil dan sepeda, bola olahraga, dan lainnya
- 3 mode inflasi (kecepatan tinggi, kecepatan rendah atau mode bola)
- Pengukur tekanan digital dengan fungsi tambahan yang nyaman
- Lampu kerja LED untuk pengoperasian yang mudah dalam kondisi gelap
- Termostat melindungi mesin dari panas berlebih



**XGT XPT**



British Adapter, French Adapter, Ball Adapter, Swim Ring Adapter, Battery, Charger

Rated operating time	10 min On/ 5 min Off
Max air pressure	1.110 kPa (161 PSI) [11,1 bar]
Air discharge amount	200 kPa: 24 L/min / 700 kPa: 12 L/min
Dimensions (L x W x H)	w/ BL4040: 329 x 108 x 231 mm
Net weight	2,9 - 3,5 kg

### UB001G

Cordless Blower



- Daya tiup yang besar (maksimal 17 N)
- Daya tiup maksimal 17 N selalu tersedia pada Mode Peningkatan
- Tahan air (Wet Guard/kompatibel untuk IPX4)
- Berdaya tinggi untuk mengurangi kelelahan pengguna
- Desain ringkas dan ringan untuk digunakan dengan satu tangan



**XGT BL MOTOR**



Shoulder Belt, End Nozzle, Flat Nozzle, Extension Nozzle, Adapter Pipe, Battery, Charger

Max Air Volume	Cruise Control Mode: 0 - 13,5 m <sup>3</sup> /min
	Boost Mode: 16,0 m <sup>3</sup> /min
Max Air Velocity	Cruise Control Mode: 53 m/s /
	Boost Mode: 64 m/s
Blowing Force	Cruise Control Mode: 0 - 12 N /
	Boost Mode: 17 N
No Load Speed	Cruise Control Mode: 0 - 20.000 RPM /
	Boost Mode: 23.000 RPM
Continuous Use	Cruise Control Mode w/ BL4050F: 15 min
	Boost Mode w/ BL4050F: 8 min
Dimensions (L x W x H)	w/ BL4020 / BL4025:
	905 - 1.005 x 167 x 297 mm
	w/ BL4040: 917 - 1.017 x 167 x 297 mm
Net weight	3,1 - 3,9 kg

**Cordless Dust Blower**  
AS001GZ

**Dapat digunakan untuk beragam pemakaian**



**KENYAMANAN**

Penggantian nozel sekali sentuh



**DESAIN**

Dengan berbagai nozel ujung, model ini dapat memenuhi berbagai aplikasi mulai dari penggunaan profesional hingga penggunaan di rumah



**KENYAMANAN**

Sakelar pengunci untuk mengurangi kelelahan operator



**KONTROL**

4 tahap volume udara; dapat dipilih sesuai dengan aplikasi Anda

**AS001GZ**

**40Vmax XGT BL Cordless Dust Blower**

Cordless Dust Blower

**new**



- Beragam sambungan nozel untuk berbagai fungsi pembersihan/pengisian udara dan banyak lagi
- Pengisian dan pengempisan dengan volume tinggi - tekanan rendah
- Pengaturan volume udara 4 tingkat dan sakelar pengatur variasi kecepatan untuk pengendalian maksimal
- Terdapat fitur kunci pada sakelar yang berfungsi untuk mencegah kelelahan pengguna
- Sangat ringan hanya 800 gram



Max blowing force	Mode: 4/ 3/ 2/ 1: 2.8/ 2.3/ 1.7/ 1.1 N
Max air volume	Mode: 4/ 3/ 2/ 1: 1.1/ 1.0/ 0.8/ 0.6 m <sup>3</sup> /min
Max sealed suction	10,3 kPa
Continuous Use	Mode: 4/ 3/ 2/ 1: 13/ 17/ 25/ 50 min
Dimensions (L x W x H)	w/ BL4020 / BL4025: 180 x 94 x 248 mm
Net weight	1,5 - 2,3 kg



Nozzle 3, Nozzle 7, Nozzle 13, Pinch valve nozzle, Wide range nozzle, Battery, Charge. Country-specific: Flexible nozzle complete, Air vent hose complete, Rubber attachment 20-30, Rubber attachment, Filter C complete, Belt clip

## Cordless Grass Trimmer

### UR012G

# Tangguh setara dengan mesin grass trimmer 40cc



Wet Guard

**WG**  
WET GUARD

Ketahanan air yang tinggi memungkinkan untuk mengoperasikan mesin meskipun basah dengan air.

**BL**  
MOTOR

**Motor yang dipasang di bagian belakang**

Membuat keseimbangan berat pahat mirip dengan mesin pemangkas rumput.

**ADT**

**Automatic torque Drive Technology**

Secara otomatis mengubah kecepatan potong sesuai dengan kepadatan rumput.


**AFT**

**Active Feedback sensing Technology**

Pembatas torsi mematkan motor jika alat tiba-tiba dipaksa mengunci.

**Bracket pengencang pegangan tanpa alat**

Arah pegangan yang dapat disesuaikan, mudah dibawa

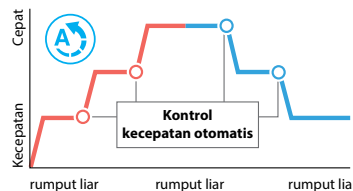

UR012G

40V<sup>max</sup> X2 (80V<sup>max</sup>) XGT BL ADT AFT Cordless 3-Speed Grass Trimmer, Bike Handle

Cordless Grass Trimmer



new

- Daya tinggi dan lebar pemotongan besar 480 mm mirip dengan pemangkas rumput mesin kelas 40cc
- Kontrol kecepatan konstan meminimalkan pengurangan kecepatan rotasi di bawah beban
- Automatic torque Drive Technology (ADT) menyesuaikan kecepatan dan torsi pada saat pengerjaan untuk kinerja optimal
- Active Feedback sensing Technology (AFT) mematkan motor jika mata pisau tiba-tiba terpaksa berhenti



XGT BL ADT AFT WG



Safety Goggles, Metal Blade / Nylon Cutting Head / Plastic Blade (country-specific), Blade Cover (for the product with metal blade), Accessory Bag, Hex Wrench, Box Wrench, Shoulder Belt, Battery, Charger

Cutting Width	Metal Blade: 305 mm (12")
	TCT Saw Blade: 255 mm (10")
	Nylon Cutting Head: 480 mm (18-7/8")
No Load Speed	Plastic Blade: 305 mm (12")
	Metal Blade (3 / 2 / 1):
	0 - 6.800 / 0 - 5.000 / 0 - 3.500 RPM
Spindle Size	Nylon Cutting Head (3 / 2 / 1):
	0 - 5.000 / 0 - 4.200 / 0 - 3.500 RPM
	0 - 6.800 / 0 - 5.000 / 0 - 3.500 RPM
Dimensions (L x W x H)	M10 x 1,25 LH
	w/o Cutting Tool, w/ BL4050F:
Net weight	1.790 x 680 x 590 mm
	8,0 - 9,3 kg



## UR006G / UR007G / UR008G 40Vmax XGT BL ADT AFT Cordless 3-Speed Grass Trimmer

### Cordless Grass Trimmer

#### UR006G

#### Bike handle



#### UR007G / UR008G

#### Loop handle



- Pemegang pegangan tanpa alat untuk operasi yang nyaman dan penyimpanan yang ringkas (khusus UR006G)
- Daya output maksimal 1,0 kW setara dengan mesin potong rumput 30 mL
- Lebar potong 43 cm (17") setara dengan mesin potong rumput 30 mL
- Automatic torque Drive Technology (ADT) menyesuaikan kecepatan dan torsi pada saat pengerjaan untuk kinerja optimal
- Active Feedback sensing Technology (AFT) mematikan motor jika mata pisau tiba-tiba terpaksa berhenti



Safety Goggles, Metal Blade / Nylon Cutting Head / Plastic Blade (country-specific), Blade Cover (for the product with metal blade), Accessory Bag, Hex Wrench, Box Wrench, Shoulder Belt, Battery, Charger

Cutting Width	Metal Blade: 255 mm (10") (UR006G, UR007G) Nylon Cutting Head: 430 mm (17") Plastic Blade: 305 mm (12")
No Load Speed	Metal Blade (3/2/1): 0-7.000/0-5.500/0-4.600 RPM Nylon Cutting Head (3/2/1): 0-5.500/0-5.000/0-4.600 RPM Plastic Blade (305 mm) (3/2/1): 0-7.000/0-5.500/0-4.600 RPM Plastic Blade (255 mm) (3/2/1): 0-5.500/0-5.000/0-4.600 RPM
Spindle Size	M10 x 1,25 LH
Dimensions (L x W x H)	w/o Cutting Tool, w/ BL4020 / BL4025 / BL4040: UR006G: 1.815 x 677 x 540 mm UR007G: 1.815 x 396 x 266 mm UR008G: 1.803 x 224 x 300 mm
Net weight	UR006G: 5,7 - 6,3 kg UR007G: 5,3 - 5,9 kg UR008G: 5,0 - 5,7 kg

## UR002G / UR003G 40Vmax XGT BL ADT AFT Cordless 3-Speed Grass Trimmer

### Cordless Grass Trimmer

#### UR002G

#### Bike handle



#### UR003G

#### Loop handle



- WetGuard dan IPX4: Kinerja tahan air yang unggul
- Tombol tekan ukuran besar untuk pengoperasian mudah, bahkan ketika memakai sarung tangan
- Automatic torque Drive Technology (ADT) menyesuaikan kecepatan dan torsi pada saat pengerjaan untuk kinerja optimal
- Active Feedback sensing Technology (AFT) mematikan motor jika mata pisau tiba-tiba terpaksa berhenti



Safety Goggles, Metal Blade / Nylon Cutting Head / Plastic Blade (country-specific), Blade Cover (for the product with metal blade), Accessory Bag, Hex Wrench, Box Driver, Shoulder Belt, Battery, Charger

Cutting Width	Metal Blade: 230 mm (9") TCT Saw Blade: 255 mm (10") Nylon Cutting Head: 350 mm (13-3/4") Plastic Blade: 255 mm (10")
Spindle Size	M10 x 1,25 LH
No Load Speed	High / Mid / Low: 0 - 6.500 / 5.300 / 3.500 RPM
Run Time (No load)	w/ Metal Blade: w/ BL4050F High / Mid / Low: 153 / 227 / 505 min w/ Nylon Cutting Head: w/ BL4050F High / Mid / Low: 45 / 80 / 259 min w/ Plastic Blade: w/ BL4050F High / Mid / Low: 163 / 244 / 513 min
Dimensions (L x W x H)	w/o Cutting Tool, w/ BL4020 / BL4025 / BL4040: UR002G: 1.735 x 630 x 500 mm UR003G: 1.735 x 355 x 230 mm
Net weight	UR002G: 4,6 - 5,3 kg UR003G: 4,1 - 4,7 kg

## UA002G 40Vmax XGT BL AFT Cordless Telescopic Pole Saw

### Cordless Telescopic Pole Saw

new

- Dilengkapi dengan motor brushless berdaya tinggi
- Kinerja tahan air yang tinggi
- Tiang teleskopik (tiang tanpa alat)
- Desain ramping memungkinkan alat untuk bergerak bebas diantara cabang
- Dapat dioperasikan dengan cara menggantung bagian kepala menggunakan pengait
- Pemangkas cabang dengan ketinggian maksimum sekitar 5 m



Saw Chain, Guide Bar, Guide Bar Case, Wrench, Hex Wrench, Band Assembly, Battery, Charger, Round File (country-specific), File (country-specific), Chain Oil (country-specific)

Guide Bar Length	250 mm (10")
Saw chain	Gauge: 1,1 - 1,3 mm (0,043 - 0,050") Pitch: 3/8"
Chain Speed	20,0 m/s (1.200 m/min) (3.940 FPM)
Oil Tank Capacity	160 mL
Dimensions (L x W x H)	w/o Guide Bar: 2.515 - 3.747 x 157 x 191 mm
Net weight	7,6 - 8,9 kg

## UC006G 40Vmax XGT BL Brushless Cordless Chain Saw

### Cordless Chain Saw

new

- Ringan untuk mengurangi kelelahan operator
- Sistem penggerak langsung motor BL Rotor Luar menghasilkan kecepatan rantai 0-24,8 m/s (0-1.490 m/mnt) untuk pemotongan cepat, setara dengan gergaji mesin kelas 30cc
- Sakelar daya utama dengan fungsi mati otomatis untuk menghemat baterai dan menghindari penyalaaan yang tidak disengaja
- WetGuard/IPX4; Performa tahan air yang luar biasa
- Tingkat kebisingan rendah dan nol emisi untuk kenyamanan operator



Saw Chain, Guide Bar, Guide Bar Cover, Oil supply (country-specific), Round File (country-specific), Box Wrench, Battery, Charger

Guide Bar Length	250 mm (10")
Chain Pitch	1/4"
Chain Gauge	1,3 mm (0,050")
Chain Speed	0 - 24,8 m/s (0 - 1.490 m/min) (0 - 4.880 FPM)
Chain Oil Tank Volume	200 mL (6,8 US oz)
Dimensions (L x W x H)	w/o Guide Bar: 266 x 194 x 227 mm
Net weight	3,9 - 4,5 kg

## Cordless Chain Saw

UC004G / UC003G / UC002G

## Sekuat gergaji mesin bensin 30cc

**KEKUATAN**

Sistem penggerak langsung motor BL Rotor Luar yang dibuat oleh Makita menyediakan tenaga dari gergaji mesin bensin 30cc

**KENYAMANAN**

Batang mur disimpan di penutup sproket (roda bergerigi) untuk pengaturan dan perawatan yang mudah

**INOVASI**

Tidak ada bensin, emisi, dan pencampuran oli. Memiliki tingkat kebisingan yang rendah

**KONTROL**

Kecepatan variabel dan kecepatan rantai tinggi (0 - 1.490 m/min) untuk meningkatkan kinerja pemotongan

**UC004G / UC003G / UC002G 40Vmax XGT BL Brushless Cordless Chain Saw**

Cordless Chain Saw

new

- Ringan untuk mengurangi kelelahan operator
- Sistem penggerak langsung motor BL Rotor Luar menghasilkan kecepatan rantai 0-24,8 m/s (0-1.490 m/mnt) untuk pemotongan cepat, setara dengan gergaji mesin kelas 30cc
- Sakelar daya utama dengan fungsi mati otomatis untuk menghemat baterai dan menghindari penyalaaan yang tidak disengaja
- WetGuard/IPX4; Performa tahan air yang luar biasa
- Tingkat kebisingan rendah dan nol emisi untuk kenyamanan operator



Saw Chain, Guide Bar, Guide Bar Cover, Oil supply (country-specific), Round File (country-specific), Box Wrench, Battery, Charger

Guide Bar Length	UC004G: 350 mm (14") UC003G: 300 mm (12") UC002G: 250 mm (10")
Chain Pitch	3/8"
Chain Gauge	1,1 mm (0,043")
Chain Speed	0 - 24,8 m/s (0 - 1.490 m/min) (0 - 4.880 FPM)
Chain Oil Tank Volume	200 mL (6,8 US oz)
Dimensions (L x W x H)	w/o Guide Bar: 266 x 194 x 227 mm
Net weight	UC004G: 4,0 - 4,6 kg UC003G: 3,9 - 4,5 kg UC002G: 3,8 - 4,4 kg

## Cordless Hedge Trimmer

UH004G / UH005G / UH006G / UH007G / UH008G / UH009G

### Kinerja pemotongan teruji setara mesin / AC hedge trimmers



#### UH004G / UH005G

**Mata gergaji gigi tajam**  
Bentuk gigi optimal untuk potongan mulus ranting kecil



Diameter ranting maksimal




#### UH006G / UH007G

**Mata gergaji gigi tajam**  
Optimal untuk potongan kasar ranting besar



Diameter ranting maksimal




#### UH008G / UH009G

**Mata gergaji standar**




Diameter ranting maksimal



#### UH004G / UH005G

Cordless Hedge Trimmer



#### 40Vmax XGT BL Brushless Cordless Hedge Trimmer

- Baterai 40Vmax XGT Li-Ion dan motor BL memberikan daya tinggi dan kinerja pemotongan yang unggul
- Kinerja pemotongan yang andal setara mesin / AC hedge trimmers
- Bentuk mata gergaji yang optimal untuk potongan mulus pada ranting kecil
- WetGuard: Kinerja tahan air yang unggul
- Waktu kerja terus menerus tanpa beban dari baterai terisi penuh setara atau lebih lama dibandingkan trimmer mesin bensin dengan bahan bakar penuh




Blade Cover, Safety Goggles (country-specific), Chip Receiver, Battery, Charger

Blade Length	UH004G: 600 mm (23-5/8") UH005G: 750 mm (29-1/2")
Max Cutting Capacity	23,5 mm (15/16")
Strokes Per Minute	High / Mid / Low: 5.000 / 3.600 / 2.000 SPM
Dimensions (L x W x H)	UH004G: w/ BL4020 / BL4025: 1.120 x 223 x 191 mm w/ BL4050F: 1.120 x 223 x 214 mm w/ BL4040: 1.120 x 223 x 191 mm
	UH005G: w/ BL4020 / BL4025: 1.263 x 223 x 191 mm w/ BL4050F: 1.263 x 223 x 214 mm w/ BL4040: 1.263 x 223 x 191 mm
Net weight	UH004G: 4,3 - 4,9 kg UH005G: 4,5 - 5,1 kg

#### UH006G / UH007G

Cordless Hedge Trimmer



#### 40Vmax XGT BL Brushless Cordless Hedge Trimmer

- Baterai 40Vmax XGT Li-Ion dan motor BL memberikan daya tinggi dan kinerja pemotongan yang unggul
- Kinerja pemotongan yang andal setara mesin / AC hedge trimmers
- Optimal untuk potongan kasar pada ranting besar
- WetGuard: Kinerja tahan air yang unggul
- Waktu kerja terus menerus tanpa beban dari baterai terisi penuh setara atau lebih lama dibandingkan trimmer mesin bensin dengan bahan bakar penuh




Blade Cover, Safety Goggles (country-specific), Chip Receiver, Battery, Charger

Blade Length	UH006G: 600 mm (23-5/8") UH007G: 750 mm (29-1/2")
Max Cutting Capacity	25,0 mm (1")
Strokes Per Minute	High / Mid / Low: 4.000 / 3.600 / 2.000 SPM
Dimensions (L x W x H)	UH006G: w/ BL4020 / BL4025: 1.123 x 223 x 191 mm w/ BL4050F: 1.123 x 223 x 214 mm w/ BL4040: 1.123 x 223 x 191 mm
	UH007G: w/ BL4020 / BL4025: 1.274 x 223 x 191 mm w/ BL4050F: 1.274 x 223 x 214 mm w/ BL4040: 1.274 x 223 x 191 mm
Net weight	UH004G: 4,4 - 5,0 kg UH005G: 4,6 - 5,2 kg

#### UH008G / UH009G

Cordless Hedge Trimmer



#### 40Vmax XGT BL Brushless Cordless Hedge Trimmer

- Baterai 40Vmax XGT Li-Ion dan motor BL memberikan daya tinggi dan kinerja pemotongan yang unggul
- Kinerja pemotongan yang andal setara mesin / AC hedge trimmers
- WetGuard: Kinerja tahan air yang unggul
- Waktu kerja terus menerus tanpa beban dari baterai terisi penuh setara atau lebih lama dibandingkan trimmer mesin bensin dengan bahan bakar penuh
- Keseimbangan yang tepat antara daya tinggi dan bobot ringan yang memudahkan bermanuver berkat satu baterai 18V LXT sebagai sumber daya



Blade Cover, Safety Goggles (country-specific), Chip Receiver, Battery, Charger


Blade Length	UH008G: 600 mm (23-5/8") UH009G: 750 mm (29-1/2")
Max Cutting Capacity	21,5 mm (7/8")
Strokes Per Minute	High / Mid / Low: 5.000 / 3.600 / 2.000 SPM
Dimensions (L x W x H)	UH008G: w/ BL4020 / BL4025: 1.120 x 223 x 191 mm w/ BL4050F: 1.120 x 223 x 214 mm w/ BL4040: 1.120 x 223 x 191 mm
	UH009G: w/ BL4020 / BL4025: 1.262 x 223 x 191 mm w/ BL4050F: 1.262 x 223 x 214 mm w/ BL4040: 1.262 x 223 x 191 mm
Net weight	UH008G: 4,3 - 4,9 kg UH009G: 4,4 - 5,0 kg

## UH013G / UH014G

## 40Vmax XGT BL Brushless Cordless Hedge Trimmer

Cordless Hedge Trimmer

new

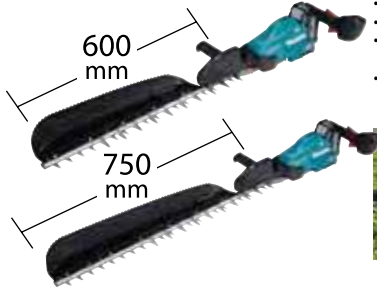

- Baterai 40Vmax XGT Li-Ion dan motor BL memberikan daya tinggi dan kinerja pemotongan yang unggul
- Desain ringan
- WetGuard: Kinerja tahan air yang unggul
- Kontrol kecepatan konstan meminimalkan pengurangan kecepatan potong, memberikan pemangkasan konstan
- Peningkatan kecepatan dan torsi pemotongan untuk pemotongan yang halus dan efisien




Blade Cover, Safety Goggles (country-specific), Chip Receiver (country-specific), Battery, Charger

Blade Length	UH013G: 600 mm (23-5/8") UH014G: 750 mm (29-1/2")
Max Cutting Capacity	18 mm (11/16")
Strokes Per Minute	High / Mid / Low: 5.000 / 3.600 / 2.000 SPM
Dimensions (L x W x H)	UH013G: w/ BL4020 / BL4025: 1.085 x 270 x 135 mm w/ BL4050F: 1.085 x 270 x 168 mm UH014G: w/ BL4020 / BL4025: 1.225 x 270 x 135 mm w/ BL4050F: 1.225 x 270 x 168 mm w/ BL4040: 1.225 x 270 x 150 mm
Net weight	UH013G: 3,9 - 4,5 kg UH014G: 4,0 - 4,7 kg

## Cordless Earth Auger

DG001G

## Kinerja pengeboran yang tinggi dengan bodi ringan

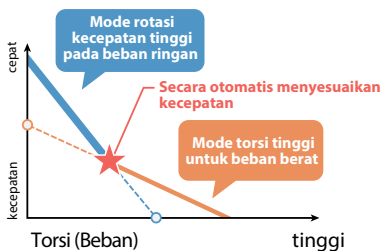

**ADT**  
Automatic Torque Drive  
Technology



## Saklar putar balik

Ekstraksi mata bor yang tersumbat di tanah dengan resistensi tinggi seperti kotoran



## Pembatas Torsi

Torsi akan mulai, motor akan terpisah dari poros, dan bor akan berhenti berputar

Tergantung pada beban, kecepatan potong secara otomatis diubah untuk operasi yang optimal

## DG001G

## 40Vmax XGT BL ADT Cordless Earth Auger

Cordless Earth Auger

- Desain ringan untuk mengurangi kelelahan operator
- Sambungan untuk bor tanah ini mencakup batang untuk menyerap kekuatan reaksi dan pegangan tambahan, sehingga memudahkan pengguna membuat lubang di tanah
- Reverse Rotation mode dengan tombol Reverse memungkinkan operator mengambil mata bor yang tersangkut di tanah yang berat seperti tanah lempung
- Adaptor mata bor memungkinkan pemakaian mata bor dari bor tanah mesin bensin



Chuck Key, Chuck Key Holder, Hex Wrench, Adapter, Battery, Charger

Capacity	Clay Soil: 150 mm Sandy Soil: 200 mm
Chuck Capacity	2 - 13 mm (1/16 - 1/2")
No Load Speed	High / Low: 0 - 1.500 / 0 - 400 RPM
Max Fastening Torque	High: 55 N·m (487 in.lbs.) Low: 136 N·m (1.210 in.lbs.)
Dimensions (L x W x H)	w/ BL4020 / BL4025: 836 x 605 x 199 mm w/ BL4050F: 863 x 605 x 199 mm
Net weight	7,2 - 8,1 kg

# Multi Function


## Cordless Multi Function Power Head UX01G / DUX60 / DUX18



Motor BL berdaya tinggi memungkinkan pekerjaan dalam beban berat



Tombol putaran balik untuk memudahkan pemindahan potongan rumput dari alat pemotong



Penggantian mudah



Mudah dibawa




Motor BL berdaya tinggi memungkinkan pengoperasian yang lebih nyaman dalam pengaplikasian tugas berat menggunakan tambahan seperti power brush, power sweep, blower, dll.



### Active Feedback sensing Technology

- Jika kickback terjadi pada saat menggunakan tambahan dibawah ini, maka rem bekerja secara otomatis:
  - Pemotongan sikat dengan tambahan pisau logam
  - Tambahan gergaji tiang
- Jika sensor mendeteksi penurunan putaran yang drastis, motor akan langsung berhenti.

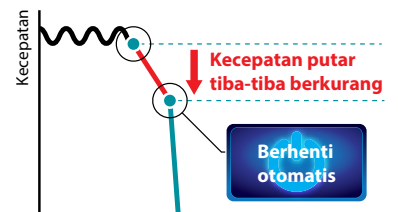

Waktu

### UX01G

### 40Vmax XGT BL AFT Cordless Multi Function Power Head

#### Cordless Multi Function Power Head



- Motor BL berdaya tinggi memungkinkan pekerjaan dengan beban berat
- WetGuard dan IPX4: Kinerja tahan air yang luar biasa
- Active Feedback sensing Technology (AFT) mematikan motor jika kecepatan putar tiba-tiba berkurang
- Pemilihan kecepatan 3 tingkat (Tinggi/Sedang/Rendah) dengan sakelar pengendali kecepatan
- Multi-tool system terdiri dari power head dan beragam sambungan tambahan, ideal untuk berbagai pemakaian



No Load Speed	High: 0 - 9.700 RPM Med: 0 - 8.200 RPM / Low: 0 - 5.700 RPM
Dimensions w/o Barrier Bar (L x W x H)	w/ BL4020 / BL4025: 1.001 x 225 x 209 mm w/ BL4040: 1.001 x 225 x 209 mm
Dimensions w/ Barrier Bar (L x W x H)	w/ BL4020 / BL4025: 1.001 x 320 x 209 mm w/ BL4040: 1.001 x 320 x 209 mm
Net weight	4,2 - 12,6 kg

Harness, Safety Goggles, Hex Wrench, Accessory Bag, Tool bag (for spec with Brushcutter attachment only), Carbide-Tipped Saw Blade (for spec with EM402MP only), Box Wrench (for spec with EM402MP / EM403MP / EM404MP only), Metal blade fixing tool (Clamp washer, Nut, Cup) (for spec with EM402MP / EM403MP / EM404MP), Nylon Cutting Head (for spec with EM403MP / EM404MP / EM405MP / EM406MP only), Battery, Charger

### DUX60

### 18V X2 LXT BL AFT Cordless Multi Function Power Head

#### Cordless Multi Function Power Head



- Motor BL berdaya tinggi memungkinkan pekerjaan dengan beban berat
- Active Feedback sensing Technology (AFT) mematikan motor jika kecepatan putar tiba-tiba berkurang
- Pemilihan kecepatan 3 tingkat (Tinggi/Sedang/Rendah) dengan sakelar pengendali kecepatan
- Multi-tool system terdiri dari power head dan beragam sambungan opsional, ideal untuk berbagai pemakaian
- Motor BL dengan rasio daya terhadap bobot dan ukuran yang tinggi



No Load Speed	High: 0 - 9.700 RPM Medium: 0 - 8.200 RPM Low: 0 - 5.700 RPM
Dimensions (L x W x H)	1.011 x 320 x 216 mm
Net weight	4,1 - 8,7 kg

Harness, Safety Goggles, Hex Wrench, Accessory Bag, Tool bag (for spec with Brushcutter attachment only), Carbide-Tipped Saw Blade (for spec with EM402MP only), Box Wrench (for spec with EM402MP/EM403MP/EM404MP only), Metal blade fixing tool (Clamp washer, Nut, Cup) (for spec with EM402MP/EM403MP/EM404MP), Nylon Cutting Head (for spec with EM403MP/EM404MP/EM405MP/EM406MP only), Battery, Charger

# Multi Function

## DUX18

## 18V LXT BL AFT Cordless Multi Function Power Head

Cordless Multi Function Power Head



- Sistem terpisah antara power head dan attachment/sambungan, sehingga mudah dibawa-bawa
- Sistem terdiri dari power head dan beragam pilihan sambungan, ideal untuk berbagai pemakaian pertamanan dan pertanian
- Motor BL berdaya tinggi memungkinkan pekerjaan dengan beban berat
- Active Feedback sensing Technology (AFT) mematkan motor jika kecepatan putar tiba-tiba berkurang
- Pemilihan kecepatan 2 tingkat (Tinggi/Rendah) dengan trigger pengendali kecepatan



**LXT MOTOR AFT XPT**



No Load Speed	High: 0 - 9.700 RPM Low: 0 - 6.800 RPM
Dimensions w/o Barrier Bar (L x W x H)	w/ BL1820B: 977 x 225 x 175 mm w/ BL1830B / BL1840B / BL1850B / BL1860B: 983 x 225 x 175 mm
Dimensions w/ Barrier Bar (L x W x H)	w/ BL1820B: 977 x 318 x 175 mm w/ BL1830B / BL1840B / BL1850B / BL1860B: 983 x 318 x 175 mm
Net weight	2,8 - 10,3 kg

Not compatible with 2.0Ah, 1.5Ah batteries

Harness, Safety Goggles, Hex Wrench, Accessory Bag, Carbide-Tipped Saw Blade (for spec with EM402MP only), Box Wrench (for spec with EM402MP/EM408MP/EM409MP only), Nylon Cutting Head (for spec with EM408MP/EM409MP only), Battery, Charger

## PILIHAN ATTACHMENT UX01G/DUX60/DUX18

Terdiri dari power head dan pilihan attachment serbaguna yang ideal untuk berbagai aplikasi.



**Brushcutter**  
EM401MP\* / EM402MP  
EM403MP\* / EM404MP\*  
EM405MP\* / EM406MP\*



**Rotary Scissors**  
EM407MP



**Edger**  
EE400MP



**Pole saw**  
EY402MP  
EY403MP



**Hedge trimmer**  
Straight: EN410MP  
Angle adjustment:  
EN400MP  
EN401MP




**Ground trimmer**  
EN420MP  
EN421MP



**Grass trimmer**  
EM408MP  
EM409MP

\*UX01G / DUX60 only



**Cultivator**  
KR400MP  
KR401MP



**Coffee harvester**  
EJ400MP



**Power brush**  
BR400MP




**Power sweep**  
SW400MP



**Blower**  
UB400MP  
UB401MP

**Shaft extension attachment**  
LE400MP

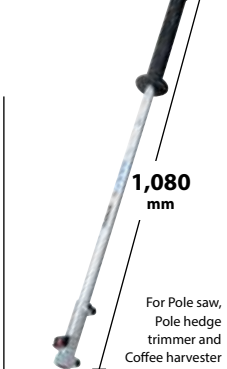

For Pole saw,  
Pole hedge  
trimmer and  
Coffee harvester

# 18V X2 Lithium-ion

Powered by two 18V Li-ion batteries in series

**18V + 18V → 36V LXT**

**EXPAND YOUR LITHIUM-ION LINEUP**



**Lawn Mower**  
DLM382 / DLM432 / DLM460 / DLM462 /  
DLM463 / DLM465 / DLM530 / DLM532 /  
DLM533 / DLM534 / DLM536 / DLM537

**Chain Saw**  
DUC405 / DUC400 / DUC355 /  
DUC353 / DUC305 / DUC303 /  
DUC256 / DUC306 / DUC356 /  
DUC406

**High Pressure Washer**  
DHW080

**Blower**  
DUB361 / DUB362 /  
DUB363

**Grass Trimmer**  
DUR364L / DUR368A /  
DUR368L / DUR369A /  
DUR369L / DUR369N

**Pole Saw**  
DUA250 / DUA251 /  
DUA300 / DUA301

**Multi Function  
Power Head**  
DUX60

**Battery Powered  
Pruning Shears**  
DUP361 / DUP362

**Earth Auger**  
DDG460

**Backpack Vacuum Cleaner**  
DVC261 / DVC265 / DVC660 /  
DVC665

**Portable Power Pack**  
PDC1200

Equipped with built-in  
battery cells

**Adapter set**

**Portable Power Pack**  
PDC01

**Adapter set**

**Upright  
Cleaner**  
DVC560

**Shear  
Wrench**  
DWT310

**Plunge Cut Saw**  
DSP600 / DSP601

**Vacuum Cleaner**  
DVC865L / DVC866L / DVC867L /  
DVC155L / DVC156L / DVC157L

**Corded and Cordless  
Vacuum Cleaner**  
DVC860L / DVC861L / DVC150L /  
DVC151L

**Battery Adapter**  
BAP182



EXPAND YOUR LITHIUM-ION LINEUP

**DWT310**
**18V X2 (36V) LXT BL Brushless Cordless M16 (5/8") / M20 (3/4") / M22 (7/8") 804 N-m (593 ft.lbs.) Shear Wrench**
**Cordless Shear Wrench**


- Waktu pengencangan 14% lebih cepat dibandingkan dengan Model 6922NB
- Mampu mencapai 380 torsi geser baut M22 (7/8") dengan dua baterai 18V 6.0 Ah
- Solusi 18V untuk kebutuhan setara corded power tools
- Dua baterai 18V LXT Li-Ion memberikan tenaga dan waktu kerja setara corded tools tanpa perlu melepas platform baterai 18V LXT
- Tenaga tinggi dari motor 36V (18Vx2) DC Brushless memungkinkan pengencangan dengan cepat, setara dengan corded shear wrench


**LXT BL MOTOR XPT**


Screwdriver, Shoulder Belt, Battery, Charger

Capacity	High Strength Torque Shear Bolt (HTB): M16, M20, M22 (5/8, 3/4, 7/8")
No Load Speed	14 RPM
Max Fastening Torque	804 N-m (593 ft.lbs.)
Dimensions (L x W x H)	296 x 130 x 377 mm
Net weight	6,5 - 7,1 kg

**DLW140**
**18V X2 (36V) LXT BL 355 mm (14") Toolless Portable Cut-Off**
**Cordless Portable Cut-off**


- Pemotong portabel tanpa kabel pertama di dunia
- Mampu memotong 130 metal stud dengan BL1850B x2
- Rem elektrik memungkinkan penyesuaian dilakukan dengan lebih cepat untuk memaksimalkan produktivitas
- Indikator status beban menunjukkan tingkat beban pada motor saat operasi pemotongan
- Sesuai untuk aplikasi tugas ringan seperti pemotongan tiang logam


**LXT BL MOTOR**


Cut-Off Wheel, Battery, Charger

Wheel Diameter	355 mm (14")
Hole Diameter	25,4 mm (1")
Capacity at 0°	Round: 127 mm (5")
Capacity at 45°	Round: 127 mm (5")
Dimensions (L x W x H)	Rectangular: 115 x 103 mm w/ European type safety guard:
Net weight	537 x 290 x 640 mm 17,2 - 17,8 kg

**DCE090**
**18V X2 (36V) LXT BL AFT Cordless 230 mm (9") Power Cutter, Electric Brake**
**Cordless Power Cutter**


- Kapasitas pemotongan maksimal 88 mm
- Mata Diamond 130 mm ideal untuk cordless power cutter; Mata diamond baru dengan pola diamond grit yang merata
- Active Feedback sensing Technology (AFT) mematikan motor jika kecepatan putar tiba-tiba berkurang atau mata gergaji terpaksa berhenti
- Lampu kerja LED memungkinkan operasi di lokasi gelap jika tidak ada listrik; dapat dinyalakan dan dimatikan melalui tombol di bagian atas alat
- Cover baterai melindungi baterai dari air dalam pemotongan basah


**LXT BL MOTOR AFT (BRAKE) XPT**


Hex Wrench, Wrench, Coupling Sleeve, Battery, Charger

Wheel Diameter	230 mm (9")
Max Cutting Capacity	88 mm (3-1/2")
No Load Speed	6.600 RPM
Dimensions (L x W x H)	554 x 241 x 283 mm
Net weight	5,6 - 6,3 kg

**DLS211**
**18V X2 (36V) LXT BL AWS ADT Cordless 305 mm (12") Slide Compound Miter Saw, Laser**
**Cordless Slide Compound Miter Saw**


- Auto-Start Wireless System (AWS) dapat terhubung dengan Vacuum Cleaner kompatibel via Bluetooth
- Desain rel ke depan memungkinkan alat ditempatkan sejajar dinding untuk memaksimalkan ruang kerja
- Dua baterai 18V LXT Li-Ion memberikan tenaga dan waktu kerja setara corded tools tanpa perlu melepas platform baterai 18V LXT
- Tenaga tinggi dari motor 36V (18Vx2) DC Brushless memungkinkan pemotongan dengan cepat, setara dengan cordless slide compound miter saw


**LXT BL MOTOR AWS ADT DXT**


TCT Saw Blade, Dust Bag, Triangular Rule, Vertical Vise, Hex Wrench, Battery, Charger

Blade Diameter	305 mm (12")
Hole Diameter	25,4, 30 mm (1, 1-3/16")
Miter Angle	60° / 60° L 60, 60° R
Bevel Angle	48° / 48° L 48, 48° R
Max Cutting Capacity	0° Miter: 107 x 363 x 92 x 382 mm 45° Miter, L/R: 107 x 255 x 92 x 268 mm
No Load Speed	4.400 RPM
Dimensions (L x W x H)	898 x 690 x 725 mm
Net weight	30,7 - 31,3 kg

**DLS111**
**18V X2 (36V) LXT BL AWS ADT Cordless 305 mm (12") Slide Compound Miter Saw, Laser**
**Cordless Slide Compound Miter Saw**


- Auto-Start Wireless System (AWS) dapat terhubung dengan Vacuum Cleaner kompatibel via Bluetooth
- Desain rel ke depan memungkinkan alat ditempatkan sejajar dinding untuk memaksimalkan ruang kerja
- Dua baterai 18V LXT Li-Ion memberikan tenaga dan waktu kerja setara corded tools tanpa perlu melepas platform baterai 18V LXT
- Tenaga tinggi dari motor 36V (18Vx2) DC Brushless memungkinkan pemotongan dengan cepat, setara dengan cordless slide compound miter saw


**LXT BL MOTOR AWS ADT DXT**


TCT Saw Blade, Dust Bag, Triangular Rule, Vertical Vise, Hex Wrench, Battery, Charger

Blade Diameter	260 mm (10-1/4")
Hole Diameter	15,88, 25,4, 30 mm (5/8, 1, 1-3/16")
Miter Angle	60° / 60° L 60, 60° R
Bevel Angle	48° / 48° L 48, 48° R
Max Cutting Capacity	0° Miter: 91 x 279 x 68 x 310 mm 45° Miter, L/R: 91 x 197 x 68 x 218 mm
No Load Speed	4.400 RPM
Dimensions (L x W x H)	805 x 644 x 660 mm
Net weight	26,6 - 27,3 kg

**DHS901**

**18V X2 (36V) LXT BL AWS ADT Cordless 235 mm (9-1/4") Magnesium Circular Saw, Electric Brake, Soft Start, Twin LED Light**

Cordless Circular Saw



- Mobilitas tanpa kabel memungkinkan pengoperasian yang lancar tanpa khawatir tentang penanganan kabel bahkan dalam memotong bahan yang panjang
- Bobot ringan berkat motor BL, dasar dari diecast magnesium, blade case, dll.
- Solusi 18V untuk kebutuhan setara corded power tools
- Dua baterai Li-ion 18V LXT memberikan tenaga dan waktu kerja setara corded tools tanpa perlu melepas platform baterai 18V LXT



**LXT BL MOTOR AWS ADT (BRAKE) XPT**



Wireless Unit (country-specific), TCT Saw Blade, Guide Rule, Hex Wrench, Battery, Charger

Blade Diameter	235 mm (9-1/4")
Max Cutting Capacity	0°: 85 mm (3-3/8") 45°: 61 mm (2-3/8") 60°: 41 mm (1-5/8")
No Load Speed	4.500 RPM
Dimensions (L x W x H)	430 x 224 x 316 mm
Net weight	5,8 - 6,4 kg

**DHS710**

**18V X2 (36V) LXT Li-Ion Cordless 190 / 185 mm (7-1/2" / 7-1/4") Circular Saw, Electric Brake, Soft Start**

Cordless Circular Saw



- Solusi 18V untuk kebutuhan setara dengan corded power tools
- Dua baterai 18V LXT Li-Ion memberikan tenaga dan waktu kerja setara corded tools tanpa perlu melepas platform baterai 18V LXT
- Motor buatan Makita memberikan putaran 4.800 RPM untuk pemotongan dan pembelahan dengan cepat
- Penutup dibuat dari aluminium die cast yang dirancang untuk meningkatkan daya tahan dan memastikan pemotongan yang lurus
- Ringan sehingga nyaman bagi operator



**LXT**



TCT Saw Blade, Rip Fence (Guide Rule), Hex Wrench, Dust Nozzle (country-specific), Battery, Charger

Blade Diameter	190 / 185 mm (7-1/2" / 7-1/4")
Max Cutting Capacity	0°: 68.5, 66 mm (2-11/16, 2-5/8") 45°: 49, 47.5 / 49, 47.5 mm (1-15/16, 1-7/8 / 1-15/16, 1-7/8") 50°: 44, 42.5 / 44, 42.5 mm
No Load Speed	4.800 RPM
Dimensions (L x W x H)	356 x 217 x 298 mm
Net weight	3,9 - 4,6 kg

**DHS782**

**18V X2 (36V) LXT BL AWS ADT Cordless 190/185 mm (7-1/2" / 7-1/4") Magnesium Circular Saw, Electric Brake, Soft Start, Dual LED Light**

Cordless Circular Saw



- Kompatibel dengan panduan rel tanpa adaptor sehingga memungkinkan pemotongan presisi
- Peningkatan visibilitas posisi garis tinta
- 6.000 RPM untuk pemotongan cepat
- Solusi 18V untuk kebutuhan setara dengan corded power tools
- Dua baterai 18V LXT Li-Ion memberikan tenaga dan waktu kerja setara dengan corded tools tanpa perlu melepas platform baterai 18V LXT



**LXT BL MOTOR AWS ADT (BRAKE) XPT**



TCT Saw Blade, Dust Nozzle, Hex Wrench, Guide Rule, Hook, Battery, Charger

Blade Diameter	190 / 185 mm (7-1/2" / 7-1/4")
Max Cutting Capacity	0°: 62.5, 60 mm (2-7/16, 2-3/8") 45°: 44.5, 43 mm (1-3/4, 1-11/16") 48°: 42, 41 / 42, 41 mm (1-5/8, 1-5/8 / 1-5/8, 1-5/8")
No Load Speed	6.000 RPM
Dimensions (L x W x H)	348 x 210 x 290 mm
Net weight	4,5 - 5,1 kg

**DSP600**

**18V X2 (36V) LXT BL Cordless 165 mm (6-1/2") Plunge Cut Saw**

Cordless Plunge Cut Saw



- Pemotongan hingga 80% lebih cepat dibandingkan corded tools model SP6000<sup>1</sup>
- Solusi 18V untuk kebutuhan setara corded power tools
- Dua baterai 18V LXT Li-Ion memberikan tenaga dan waktu kerja setara corded tools tanpa perlu melepas platform baterai 18V LXT
- Performa pemotongan halus dengan kecepatan hingga 6.300 RPM tanpa beban



**LXT BL MOTOR AWS ADT (BRAKE) XPT**



TCT Saw Blade, Hex Wrench, Battery, Charger

Wheel Diameter	165 mm (6-1/2")
Blade Diameter	165 mm (6-1/2")
Hole Diameter	20 mm (13/16")
Bevel Capacity	-1 - 48°
Max Cutting Capacity	0°: 56 mm (2-3/16") 45°: 40 mm (1-9/16") 48°: 38 mm (1-1/2")
No Load Speed	2.500 - 6.300 RPM
Dimensions (L x W x H)	346 x 241 x 272 mm
Net weight	4,4 - 5,1 kg

<sup>1</sup>SP6000: Plunge saw blade (jumlah ujung: 48, ketebalan ujung: 2,2 mm)



## Cordless Blower

DUB363 / DUB362 / DUB361

### 2 in 1 (Blower & Vacuum Cleaner)

Nosel panjang teleskopik 3 tahap dengan rentang penyesuaian 100mm (4")



100mm



DUB363

#### Sakelar pemacu variabel + Tuas kontrol kendali

DUB363 dilengkapi dengan sakelar interlock yang dapat mendeteksi apakah penutup pipa dan kipas terpasang dengan benar atau tidak. Mesin tidak bekerja jika tidak dipasang dengan benar.



#### DUB363

Cordless Blower

#### 18V X2 (36V) LXT BL Brushless Cordless Variable Speed Blower



- Dapat digunakan untuk pemakaian Blower maupun Vacuum
- Mampu mengisap daun jatuh dan digunakan secara kontinu untuk waktu lama
- Nozzle panjang teleskopik 3 tingkat dengan rentang penyesuaian 100 mm (4")
- Nozzle berdiameter 72 mm; Extension nozzle dan flat nozzle dapat disambungkan tanpa adaptor
- Kecepatan udara (65 m/s) dan volume udara (13,4 m<sup>3</sup>/min) yang tinggi untuk pemakaian komersial



**LXT BL XPT**



Vacuum kit, Flat Nozzle, End Nozzle, Pipe, Shoulder Belt, Hex Wrench, Battery, Charger

Max Air Volume	13,4 m <sup>3</sup> /min (473 CFM)
Max Air Velocity	65 m/s
Blowing Force	14,4 N
No Load Speed	0 - 7.850 RPM
Continuous Use	w/ BL1860B x 2, Mode 1/2: 75-30/9,5 min
Dimensions (L x W x H)	w/ 3-Stage Telescopic Long Nozzle: 737 x 786 x 836 mm
	w/ Vacuum Nozzle: 1,396 x 604 x 415 mm
Net weight	4,5 - 6,6 kg

#### DUB362

Cordless Blower

#### 18V X2 (36V) LXT BL Brushless Cordless Variable 6-Speed Blower



- Cordless Blower Makita yang paling tangguh saat ini dengan kinerja luar biasa
- Waktu kerja hingga 28 menit pada 15.800 RPM menggunakan dua baterai 18V LXT 5.0 Ah
- Tombol pemilih kecepatan/volume udara 6 tingkat dengan trigger pengendali kecepatan
- Nozzle panjang teleskopik 3 tingkat dengan rentang penyesuaian 100 mm sehingga mudah digunakan
- Ringkas dan ringan untuk penggunaan dengan satu tangan



**LXT BL XPT**



Shoulder Belt, Nozzle, Battery, Charger

Max Air Volume	13,4 m <sup>3</sup> /min (473 CFM)
Max Air Velocity	54 m/s (120 MPH)
Blowing Force	14,4 N
No Load Speed	11.400 - 21.500 RPM
Continuous Use	w/ BL1850B, Dial 1/ 2/ 3/ 4/ 5/ 6: 75/ 42/ 28/ 20/ 16/ 11,4 min
Dimensions (L x W x H)	w/ 3-Stage Telescopic Long Nozzle: 830 x 880 x 930 mm
Net weight	3,5 - 4,2 kg

#### DUB361

Cordless Blower

#### 18V X2 (36V) LXT Li-Ion Cordless 2-Speed Blower



- Waktu kerja hingga 73 menit menggunakan dua baterai 18V LXT 4.0 Ah pada pengaturan kecepatan rendah (low)
- Motor buatan Makita menghasilkan kecepatan udara maksimal 93 m/s
- 2 pilihan kecepatan (10.000 & 17.000 RPM) untuk pengendalian kecepatan optimal
- Ringkas dan ringan untuk penggunaan dengan satu tangan
- Tombol pemilih volume udara (Tinggi/Rendah)



**LXT XPT**



Shoulder Belt, Nozzle, Battery, Charger

Max Air Volume	High: 4,4 m <sup>3</sup> /min (155 CFM) Low: 2,6 m <sup>3</sup> /min (92 CFM)
Max Air Velocity	High: 93 m/s (208 MPH) Low: 57 m/s (128 MPH)
No Load Speed	High: 17.000 RPM Low: 10.000 RPM
Dimensions (L x W x H)	905 x 141 x 194 mm
Net weight	3,1 - 3,2 kg

**DUR369A**

**18V X2 (36V) LXT BL ADT AFT Cordless 3-Speed Grass Trimmer, Bike Handle**

Cordless Grass Trimmer



- Output daya maksimal 1,0 kW setara dengan mesin potong rumput 30 mL
- Kemampuan luar biasa untuk pekerjaan kontinu berkat kapasitas pendinginan tingkat tinggi yang menekan pembangkitan panas oleh controller dan motor
- Lebar potong 43 cm (17") setara dengan mesin potong rumput 30 mL
- Automatic torque Drive Technology (ADT) menyesuaikan kecepatan dan torsi pada saat pengerjaan untuk kinerja optimal
- Active Feedback sensing Technology (AFT) mematikan motor mata pisau tiba-tiba terpaksa berhenti

**LXT BL ADT AFT XPT**



Safety Goggles, Metal Blade / Nylon Cutting Head / Plastic Blade (country-specific), Blade Cover (for the product with metal blade), Accessory Bag, Hex Wrench, Box Wrench, Shoulder Belt, Battery, Charger

Cutting Width	Metal Blade: 255 mm (10") Nylon Cutting Head: 430 mm (17") Plastic Blade: 305 mm (12")
No Load Speed	Metal Blade (3 / 2 / 1): 0 - 7.000 / 0 - 5.500 / 0 - 4.600 RPM Nylon Cutting Head (3 / 2 / 1): 0 - 5.500 / 0 - 5.000 / 0 - 4.600 RPM Plastic Blade (305 mm) (3 / 2 / 1): 0 - 7.000 / 0 - 5.500 / 0 - 4.600 RPM Plastic Blade (255 mm) (3 / 2 / 1): 0 - 5.500 / 0 - 5.000 / 0 - 4.600 RPM
Spindle Size	M10 x 1,25 LH
Dimensions (L x W x H)	1.846 x 628 x 530 mm
Net weight	5,9 - 6,5 kg

**DUR365U**


**18Vx2 (36V) LXT BL Brushless Cordless 3-Speed Grass Trimmer, Bike Handle**

Cordless Grass Trimmer



- Kontrol kecepatan konstan meminimalkan pengurangan kecepatan rotasi di bawah beban
- Memberikan hingga 102 menit waktu berjalan di bawah beban pada pengaturan kecepatan rendah menggunakan dua baterai BL 1850B
- Pengukur LED ganda 3-tahap menunjukkan tingkat pengisian daya baterai
- Sistem rotasi terbalik memungkinkan operator dengan cepat membersihkan kepala pemangkas / bilah dari rumput dan gulma yang terjatir

**BL MOTOR XPT**



Fast charger, Battery cartridge, Blade, Universal guard, Shoulder harness with double shoulder strap, Wrenches

Cutting Width	350 mm
No Load Speed	High: 3.500 RPM Med: 5.300 RPM Low: 6.500 RPM
Spindle Size	M10 x 1,25 LH
Dimensions (L x W x H)	1.823 x 610 x 460 mm
Net weight	4,3 - 5,0 kg

**DUH651**

**18Vx2 (36V) LXT Li-Ion Cordless Hedge Trimmer**

Cordless Hedge Trimmer



- Dua baterai Li-Ion LXT 18V memberikan daya dan kinerja tanpa meninggalkan platform LXT 18V
- Motor buatan Makita menghasilkan 3.600 SPM untuk pemotongan lebih cepat
- Pisau 65 cm memberikan peningkatan kapasitas pemotongan
- Tingkat kebisingan yang lebih rendah hanya 82 dB(A)
- Ringkas dan ringan untuk mengurangi kelelahan operator
- Rem elektrik untuk meningkatkan produktivitas dan keselamatan operator
- Pengukur baterai LED menunjukkan tingkat pengisian daya

**LXT XPT**




Charger, Battery, Blade Cover

Blade Length	650 mm (25-1/2")
Tooth Spacing	36 mm (1-7/16")
Strokes Per Minute	2.000 - 3.600 SPM
Sound Pressure Level	82 dB(A)
Sound Power Level	91,1 dB(A)
Vibration Level	2,5 m/s <sup>2</sup> or less
Max Output	0,32 kW
Dimensions (L x W x H)	1.135 x 225 x 200 mm
Net weight	4,7 - 5,5 kg



## Cordless Pole Saw

DUA300 / DUA301

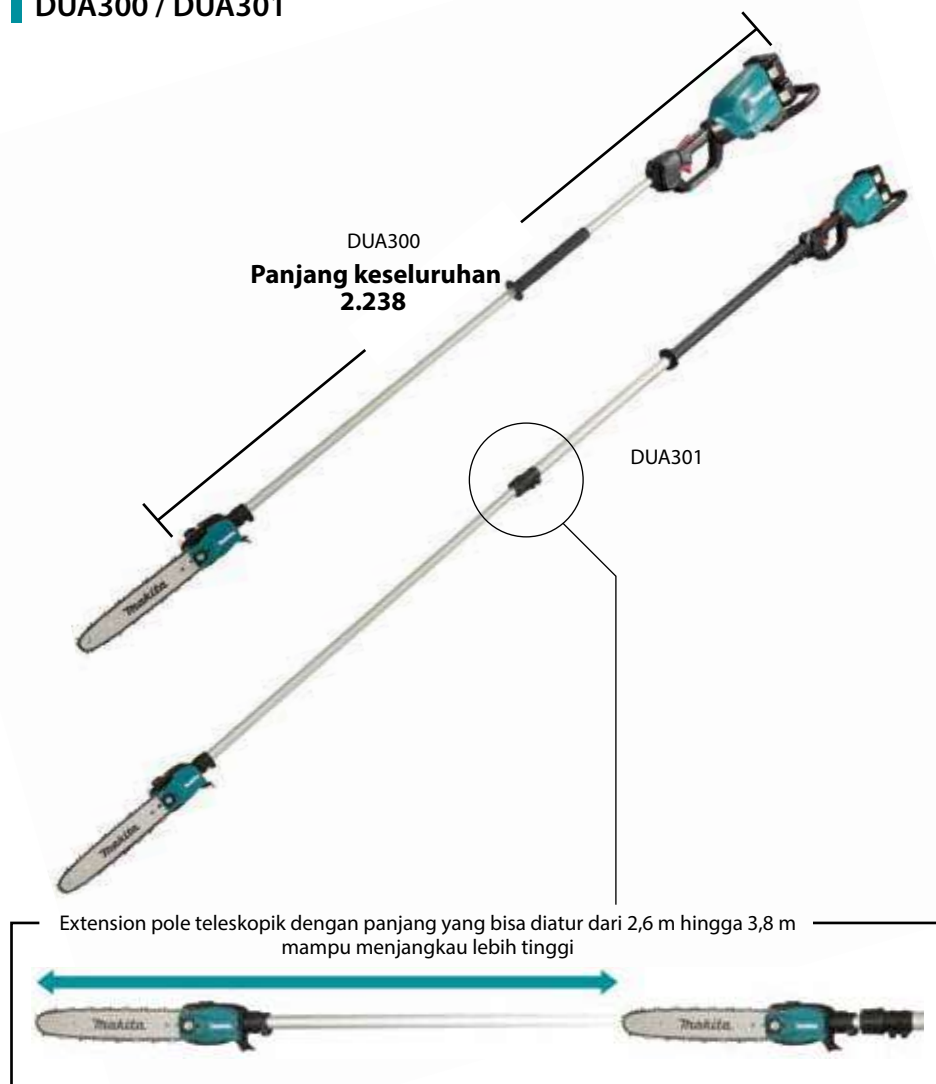

### DUA300

#### 18V X2 (36V) LXT 30 cm (12") Cordless Pole Saw

Cordless Pole Saw



- Efisiensi pemangkasan yang tinggi
- Kepala gergaji tiang yang ringan untuk mengurangi kelelahan operator
- Mode daya untuk memotong dahan yang tebal
- Ideal untuk memangkas daun dan memotong dahan pohon tinggi atau di bagian yang sulit dijangkau



**LXT BL MOTOR AFT XPT**



Saw Chain, Guide Bar, Blade Cover, Wrench, Band Assembly, Hex Wrench, Battery, Charger

Guide Bar Length	300 mm (12")
Recommended	250 - 300 mm (10 - 12")
Guide Bar Length	
Max Cutting Length	300 mm (12")
Saw Chain	Gauge: 1,1 / 1,3 mm (0,043 / 0,050") Pitch: 3/8"
Chain Speed	0 - 20,0 m/s (0 - 1.200 m/min) (0 - 3.940 FPM)
Dimensions (L x W x H)	w/o Guide Bar: 2.238 x 155 x 191 mm
Net weight	6,1 - 6,9 kg

### DUA301

#### 18V X2 (36V) LXT 30 cm (12") Cordless Telescopic Pole Saw

Cordless Telescopic Pole Saw



- Efisiensi pemangkasan yang tinggi
- Kepala gergaji tiang yang ringan untuk mengurangi kelelahan operator
- Mode daya untuk memotong dahan yang tebal
- Ideal untuk memangkas daun dan memotong dahan pohon tinggi atau pada bagian yang sulit dijangkau
- Tiang tambahan teleskopik dengan panjang yang bisa diatur dari 2,6 m hingga 3,8 m mampu menjangkau lebih tinggi



**LXT BL MOTOR AFT XPT**



Saw Chain, Guide Bar, Blade Cover, Wrench, Band Assembly, Hex Wrench, Battery, Charger

Guide Bar Length	300 mm (12")
Recommended	250 - 300 mm (10 - 12")
Guide Bar Length	
Max Cutting Length	300 mm (12")
Saw Chain	Gauge: 1,1 / 1,3 mm (0,043 / 0,050") Pitch: 3/8"
Chain Speed	0 - 20,0 m/s (0 - 1.200 m/min) (0 - 3.940 FPM)
Dimensions (L x W x H)	w/o Guide Bar: 2.530 - 3,762 x 155 x 191 mm
Net weight	7,8 - 8,5 kg

## Cordless Chain Saw

DUC353 / DUC252

Kontrol kecepatan variabel dengan pemacu

**BL MOTOR**

**Efisiensi operasi yang tinggi**

Motor BL Rotor Luar memberikan efisiensi pengoperasian yang tinggi

**XPT**  
EXTREME PROTECTION TECHNOLOGY

**Extreme Protection Technology**



Tuas pengunci



Saklar daya utama dengan fungsi mati otomatis



Sakelar pemacu kecepatan variabel



Lampu peringatan kapasitas baterai

### DUC353

Cordless Grass Trimmer

### 18Vx2 (36V) LXT Brushless 14" Chain Saw



- Rem kickback dan sakelar pemacu kecepatan variabel memberikan pengoperasian tinggi yang setara dengan gergaji mesin
- Sakelar daya utama dengan fungsi mati otomatis untuk menghemat baterai dan menghindari penyalaaan yang tidak disengaja
- Kontrol kecepatan konstan mempertahankan kecepatan konstan di bawah beban berat
- Didukung oleh dua baterai 18V LXT Li-Ion
- Dua baterai Li-Ion LXT 18V memberikan daya dan kinerja tanpa meninggalkan platform LXT 18V



**LXT BL MOTOR XPT**



Saw Chain, Guide Bar, Guide Bar Cover, Oil supply (country-specific), Battery, Charger

Guide Bar Length	350 mm (14")
Chain Pitch	3/8"
Chain Gauge	1,1 / 1,3 mm (0,043 / 0,050")
Chain Speed	0 - 20 m/s (0 - 1.200 m/min) (0 - 3.940 FPM)
Chain Oil Tank Volume	200mL
Dimensions (L x W x H)	w/o Guide Bar: 443 x 215 x 235 mm
Net weight	4,6 - 5,5 kg

### DUC252

Cordless Chain Saw

### 18Vx2 (36V) LXT Li-Ion Cordless 25 cm (10") Chain Saw, Carbing Bar



- Didukung oleh dua baterai 18V LXT Li-Ion
- Dua baterai Li-Ion LXT 18V memberikan daya dan kinerja tanpa meninggalkan platform LXT 18V
- Tingkat kebisingan rendah dan nol emisi untuk kenyamanan operator
- Rem kickback & rem elektrik untuk produktivitas maksimum dan keselamatan operator
- Pegangan atas yang ergonomis
- Performa luar biasa



**LXT XPT**



Saw Chain, Guide Bar, Guide Bar Cover, Spike Bumper, Battery, Charger

Guide Bar Length	250 mm (10")
Chain Pitch	3/8"
Chain Gauge	1,3 mm (0,050")
Chain Speed	8,3 m/s (500 m/min) (1.650 FPM)
Chain Oil Tank Volume	85 mL (2,9 US oz)
Dimensions (L x W x H)	545 x 234 x 198 mm
Net weight	4,1 - 4,7 kg

**Cordless Lawn Mower Series**

DLM539 / DLM538 / DLM533 / DLM532 / DLM530 / DLM 481 / DLM480 / DLM462 / DLM432 / DLM382



# ZERO EMISSION

**Dek Aluminium — DLM533**

**Self-Propelled**

DLM539 / DLM533 / DLM532 / DLM530 / DLM481 / DLM462 / DLM382



IPX4 (tahan air)



Bantalan bola dudukan pada as roda untuk menambah daya tahan



foto: DLM533



2 mode kecepatan  
Pengukur bahan bakar baterai ganda  
Sakelar utama

Pegangan tugas berat

**Indikator tingkat rumput**

DLM539 / DLM538 / DLM533 / DLM532 / DLM530 / DLM481 / DLM480 / DLM462



kosong penuh

**4 slot baterai**

DLM533 / DLM532 / DLM530 / DLM462



**Dek Baja**

DLM532 / DLM530 / DLM462




**Dek Plastik**

DLM539 / DLM538 / DLM481 / DLM480 / DLM382 / DLM432




**Area pemotongan yang direkomendasikan**

DLM533 / DLM532 / DLM530




BL1860B x4

DLM462



BL1860B x4

DLM539 / DLM538 / DLM481 / DLM482



BL1860B x2

DLM432



BL1860B x2

DLM382



BL1860B x2

**DLM539 / DLM538**

**18V X2 (36V) Cordless 53 cm (21") Self-Propelled 4 in 1 Lawn Mower**

Cordless Lawn Mower

**new**



- 4 in 1 (Pemotongan / Pengumpulan / Mulsa / Pembuangan Belakang)
- Pisau 2 gigi serbaguna untuk memotong dan membuat mulsa
- Ketinggian pegangan dapat disesuaikan tanpa alat hanya dengan menarik pin Kunci tipe pegas untuk melepaskan kunci
- Self-propelled untuk mengurangi kelelahan operator
- Handle bar karet lembut untuk menambah kenyamanan
- Tingkat kebisingan yang rendah cocok untuk digunakan di area perumahan dan ruang publik



**LXI XPT**



Blade, Mulching Plug, Wrench, Rod, Battery, Charger

Cutting Width	534 mm (21")
Cutting Height	20 - 100 mm (13/16 - 3-15/16")
No Load Speed	3.000 RPM
Propelling Speed	DLM539: 2,5 - 5,0 km/h / DLM538: -
Actual Mowing Area	DLM539: w/ BL1860B x2, Self-Propelled: 700 m <sup>2</sup> w/ BL1860B x2, Push-Drive: 800 m <sup>2</sup> DLM538: w/ BL1860B x2, Push-Drive: 800 m <sup>2</sup>
Continuous Use	DLM539: w/ BL1860B x2, Self-Propelled: 22 min w/ BL1860B x2, Push-Drive: 25 min DLM538: w/ BL1860B x2, Push-Drive: 25 min
Dimensions (L x W x H)	1.810 - 1.870 x 580 x 920 - 1.040 mm
Net weight	DLM539: 28,0 - 30,5 kg DLM538: 25,6 - 28,1 kg

**DLM533**

**18V X2 (36V) LXI BL Brushless Cordless 53 cm (21") Self-Propelled Lawn Mower**

Cordless Lawn Mower



- Dek aluminium die-cast tidak berkarat meskipun tergores atau rusak
- Dek aluminium die-cast memiliki ketebalan tambahan untuk meningkatkan ketahanan benturan terhadap batu
- Rumpun dapat dikeluarkan dari port belakang
- Bumper pelindung baja yang kuat untuk meningkatkan daya tahan
- Self-propelled untuk mengurangi kelelahan operator
- 10 pengaturan ketinggian pemotongan dari 20 mm hingga 100 mm
- Waktu kerja lebih lama dengan 4 slot baterai



**LXI BL MOTOR XPT**



Blade, Mulch plug, Socket Wrench, Rod, Battery, Charger

Cutting Width	534 mm (21")
Cutting Height	20 - 100 mm (13/16 - 3-15/16")
No Load Speed	Standard Mode: 2.800 RPM Low Noise Mode: 2.300 RPM
Propelling Speed	2,5 - 5,0 km/h
Actual Mowing Area	w/ BL1860B x4, Self-Propelled: 1.700 m <sup>2</sup>
Continuous Use	w/ BL1860B x4, Self-Propelled: 40 min
Dimensions (L x W x H)	1.655 - 1.740 x 590 x 990 - 1.100 mm
Net weight	42,8 - 46,7 kg

**DLM532 / DLM530**

**18V X2 (36V) LXI BL Brushless Cordless Lawn Mower**

Cordless Lawn Mower



- Didukung oleh dua baterai 18V LXI Li-Ion secara seri dan dilengkapi dengan empat port baterai
- Empat baterai Li-Ion 18V LXI dapat dimuat untuk menyediakan area pemotongan yang lebih luas
- Bekerja tidak hanya pada dua pasang baterai Li-Ion 18V LXI secara seri, tetapi juga pada satu pasang
- Sakelar pemilihan baterai manual untuk memilih pasangan baterai mana yang akan digunakan



**LXI BL MOTOR XPT**



Blade, Mulch plug, Side Discharge Mouth, Socket Wrench, Rod, Battery, Charger

Cutting Width	534 mm (21")
Cutting Height	20 - 100 mm (13/16 - 3-15/16")
No Load Speed	2.300 - 2.800 RPM
Propelling Speed	2,5 - 5,0 km/h
Actual Mowing Area	DLM533: w/ BL1860B x4, Self-Propelled: 1.700 m <sup>2</sup> DLM530: w/ BL1860B x4, Push-Drive: 2.300 m <sup>2</sup>
Continuous Use	DLM533: w/ BL1860B x4, Self-Propelled: 40 min DLM530: w/ BL1860B x4, Push-Drive: 54 min
Dimensions (L x W x H)	1.630-1.715 x 590 x 990-1.095 mm
Net weight	DLM533: 39,0 - 42,8 kg DLM530: 35,5 - 39,3 kg

**DLM481 / DLM480**

**18V X2 (36V) Cordless 48 cm (18-7/8") 4 in 1 Lawn Mower**

Cordless Lawn Mower

**new**



- 4 in 1 (Pemotongan / Pengumpulan / Mulsa / Pembuangan Belakang)
- Pisau 2 gigi serbaguna untuk memotong dan membuat mulsa
- Ketinggian pegangan dapat disesuaikan tanpa alat hanya dengan menarik pin Kunci tipe pegas untuk melepaskan kunci
- Self-propelled untuk mengurangi kelelahan operator
- Handle bar karet lembut untuk menambah kenyamanan
- Tingkat kebisingan yang rendah cocok untuk digunakan di area perumahan dan ruang publik



**LXI XPT**



Blade, Mulching Plug, Wrench, Rod, Battery, Charger

Cutting Width	480 mm (18-7/8")
Cutting Height	20 - 100 mm (13/16 - 3-15/16")
No Load Speed	3.100 RPM
Propelling Speed	DLM481: 2,5 - 5,0 km/h / DLM480: -
Actual Mowing Area	DLM481: w/ BL1860B x2, Self-Propelled: 650 m <sup>2</sup> w/ BL1860B x2, Push-Drive: 800 m <sup>2</sup> DLM480: w/ BL1860B x2, Push-Drive: 800 m <sup>2</sup>
Continuous Use	DLM481: w/ BL1860B x2, Self-Propelled: 23 min w/ BL1860B x2, Push-Drive: 28 min DLM480: w/ BL1860B x2, Push-Drive: 28 min
Dimensions (L x W x H)	1.690 - 1.740 x 530 x 930 - 1.060 mm
Net weight	DLM481: 27,1 - 29,3 kg DLM480: 24,5 - 26,8 kg

**DLM462**

**18V X2 (36V) LXI BL Brushless Cordless 46 cm (18") 3-in-1 Mower**

Cordless Lawn Mower



- Area pemotongan yang luas (800 m<sup>2</sup>)
- Soft no load: mengurangi kecepatan motor secara otomatis berdasarkan kondisi beban, sehingga mencegah kebisingan
- Mode senyap memberikan kecepatan rotasi (2.500 RPM) dengan kontrol kecepatan konstan
- Dek pemotongan baja kokoh dengan lebar 46 cm (18") untuk meningkatkan daya tahan
- Tahan air (IPX4) untuk digunakan dalam cuaca buruk



**LXI BL MOTOR XPT**



Blade, Mulch plug, Socket Wrench, Rod, Battery, Charger

Cutting Width	460 mm (18")
Cutting Height	20 - 100 mm (13/16 - 3-15/16")
No Load Speed	2.500 - 3.300 RPM
Propelling Speed	2,5 - 5,0 km/h
Actual Mowing Area	w/ BL1860B x2, Self-Propelled: 1.400 m <sup>2</sup> w/ BL1860B x2, Push-Drive: 1.900 m <sup>2</sup>
Continuous Use	w/ BL1860B x2, Self-Propelled: 40 min w/ BL1860B x2, Push-Drive: 51 min
Dimensions (L x W x H)	1.610-1.690 x 535 x 980-1,095 mm
Net weight	35,3 - 39,0 kg

**DLM432 / DLM382**
**18V X2 (36V) LXT Li-Ion Cordless 38 cm (15") / 43 cm (17") 2-in-1 Mower**
**Cordless Lawn Mower**


- Tersedia fungsi pemulsaan/mulching (dengan aksesoris tambahan)
- Dua baterai 18V LXT Li-Ion memberikan tenaga dan waktu kerja setara corded mower tanpa perlu melepas platform baterai 18V LXT
- Kotak rumput dengan indikator jumlah potongan rumput
- XPT (eXtreme Protection Technology): kinerja tahan debu dan tetesan air yang lebih tangguh, untuk digunakan dalam cuaca buruk


**LXT XPT**


Blade, Wrench, Battery, Charger

Cutting Width	DLM432: 430 mm (17") DLM382: 380 mm (15")
Cutting Height	20 - 75 mm (13/16 - 2-15/16")
No Load Speed	DLM432: 3.600 RPM DLM382: 3.700 RPM
Actual Mowing Area	DLM432: w/ BL1860B x2: 575 m <sup>2</sup> DLM382: w/ BL1860B x2: 560 m <sup>2</sup>
Continuous Use	DLM432: w/ BL1860B x2: 36 min DLM382: w/ BL1860B x2: 35 min
Dimensions (L x W x H)	DLM432: 1.435 - 1.490 x 460 x 1.005 - 1.045 mm DLM382: 1.380 - 1.410 x 450 x 985 - 1.005 mm
Net weight	DLM432: 16,8 - 17,5 kg DLM382: 16,2 - 16,9 kg

**Cordless Earth Auger**
**DDG460**

 Ringan  
dengan BL1850B (6.0Ah) x2

**8,0 kg**

 Waktu berjalan terus menerus dengan pengisian baterai penuh  
kedalaman 600mm / dengan BL1850B (6.0Ah) x2

ø150mm

 antara **135** lubang

ø200mm

 antara **70** lubang

**DDG460**
**18V X2 LXT BL Cordless Earth Auger**
**Cordless Earth Auger**


- Sambungan untuk bor tanah ini mencakup batang untuk menyerap kekuatan reaksi dan pegangan tambahan, sehingga memudahkan pengguna membuat lubang di tanah
- Mode rotasi mundur dengan tombol mundur memungkinkan operator mengambil mata bor yang tersangkut di tanah yang berat seperti tanah liat
- Desain ringan untuk mengurangi kelelahan operator
- Adaptor mata bor memungkinkan pemakaian mata bor dari bor tanah
- Motor BL menghasilkan 1.400 RPM


**LXT BL ADT XPT**


Chuck Key, Hex Wrench, Adapter, Battery, Charger

Capacity	Clay Soil: 150 mm Sandy Soil: 200 mm
Chuck Capacity	2 - 13 mm (5/64 - 1/2")
No Load Speed	High / Low: 0 - 1.400 / 0 - 350 RPM
Max Fastening Torque	High: 48 N-m (430 in.lbs.) Low: 136 N-m (1.210 in.lbs.)
Dimensions (L x W x H)	w/ BL1830B / BL1840B / BL1850B / BL1860B: 840 x 607 x 223 mm
Net weight	7,3 - 8,2 kg

**DUP362 / DUP361**
**18V X2 (36V) LXT Li-Ion Battery Powered Pruning Shears**
**Battery Powered Pruning Shears**


- Torsi lebih tinggi sehingga meningkatkan kinerja pemotongan (DUP362)
- Solusi 18V untuk kebutuhan setara corded power tools
- Dua baterai 18V LXT Li-Ion memberikan tenaga dan kinerja setara corded tools tanpa perlu melepas platform baterai 18V LXT
- Pemotongan yang mulus setara gunting pohon tangan
- Mata pisau ekstra tajam buatan Jepang


**LXT XPT**


Oil supply (country-specific), Wrench set, Diamond File, Cord Holder, Holster, Harness, Arm Band, Tool Bag, Battery, Charger, Shear Blade

Capacity	Max cutting: 33 mm (1-5/16") Max blade opening: 54 mm
Cutting Torque	DUP362: 250 N
Dimensions (L x W x H)	305 x 43 x 106 mm
Net weight	DUP362: 0,77 - 0,82 kg DUP361: 0,8 kg

**UB001C****36V Li-Ion BL Brushless Battery Powered Variable Speed Blower****Battery Powered Blower**

- Kekuatan hembusan yang kuat (Maksimal 20N)
- Dalam mode peningkatan kekuatan hembusan maksimal 20N selalu tersedia
- Sistem penggerak daya tinggi 36V menggunakan paket daya portabel Makita; Hingga empat baterai dapat dibawa di punggung pengguna, memungkinkan pengoperasian terus menerus yang lama dengan badan alat yang lebih ringan
- Tingkat kebisingan rendah; Aliran udara yang lebih lancar yang dicapai dengan mendesain ulang posisi pengontrol dan port pemasukan udara

**LXT XGT BL MOTOR**

Shoulder Belt, End Nozzle, Flat Nozzle (country-specific), Extension Nozzle (country-specific), Adapter Pipe (country-specific)

Max Air Volume	Cruise Control Mode: 0 - 15,0 m <sup>3</sup> /min Boost Mode: 17,6 m <sup>3</sup> /min
Max Air Velocity	Cruise Control Mode: 0 - 60 m/s Boost Mode: 70 m/s
Blowing Force	Cruise Control Mode: 0 - 15,0 N Boost Mode: 20,0 N
No Load Speed	Cruise Control Mode: 0 - 21.000 RPM Boost Mode: 24.000 RPM
Continuous Use	Cruise Control Mode w/ PDC01 (BL1860B x4): 28 min Cruise Control Mode w/ PDC1200: 90 min Boost Mode w/ PDC01 (BL1860B x4): 17 min
Dimensions (L x W x H)	w/ Nozzle: 960 - 1.060 x 295 x 180 mm
Net weight	2,6 - 2,9 kg

**LM001C****36V-40Vmax LXT XGT BL Brushless Battery Powered 53 cm (21") Self-Propelled Lawn Mower****Battery Powered Lawn Mower**

- Luas area kerja 5.700 m<sup>2</sup> dengan PDC1200
- 3 mode (standard/soft no load/low noise)
- Pegangan yang kokoh mampu menangani beban berat setara pemotong rumput mesin bensin
- Motor BL dirancang untuk mesin pemotong tanpa kabel dengan daya tinggi
- Kinerja pemotongan rumput yang tangguh

**LXT XGT BL MOTOR XPT**

Blade, Mulch Plug, Side Discharge Mouth, Box Wrench, Rod, Battery, Charger

Cutting Width	534 mm (21")
Cutting Height	20 - 100 mm (13/16 - 3-15/16")
No Load Speed	Normal Mode: 2.800 RPM Soft No-Load Mode: 2.300 - 2.800 RPM Noise Reduction Mode: 2.300 RPM
Propelling Speed	2,5 - 5,0 km/h
Actual Mowing Area	w/ PDC01 (BL1860B X4), 2-Tooth Blade, Self-Propelled: 1.700 m <sup>2</sup> w/ PDC1200, 2-Tooth Blade, Self-Propelled: 5.100 m <sup>2</sup>
Continuous Use	w/ PDC01 (BL1860B X4), 2-Tooth Blade, Self-Propelled: 40 min w/ PDC1200, 2-Tooth Blade, Self-Propelled: 120 min
Dimensions (L x W x H)	1.630 - 1.715 x 590 x 990 - 1.095 mm
Net weight	42,1 - 49,5 kg

**UR101C****36V Li-Ion BL ADT AFT Battery Powered 3-Speed Grass Trimmer, Bike Handle****Battery Powered Grass Trimmer**

- Kemampuan luar biasa untuk pekerjaan terus-menerus berkat kapasitas pendinginan tingkat tinggi yang menekan pembangkitan panas oleh pengontrol dan motor
- Sistem penggerak 36V berdaya tinggi memakai portable power pack PDC01; dapat memakai hingga empat baterai dalam bentuk tas ransel sehingga memungkinkan pekerjaan terus-menerus dalam waktu lama dan sekaligus memastikan alat tetap ringan
- ADT menyesuaikan kecepatan dan torsi pada saat pengerjaan untuk kinerja optimal

**LXT XGT BL ADT AFT XPT**

Safety Goggles, Metal Blade / Nylon Cutting Head / Plastic Blade (country-specific), Blade Cover (for the product with metal blade), Accessory Bag, Hex Wrench, Box Wrench, Shoulder Belt, Battery, Charger

Cutting Width	Metal Blade: 255 mm (10") Nylon Cutting Head: 430 mm (17") Plastic Blade: 305 mm (12")
No Load Speed	Metal Blade (3 / 2 / 1): 0 - 7.000 / 0 - 5.500 / 0 - 4.600 RPM Nylon Cutting Head (3 / 2 / 1) 0 - 5.500 / 0 - 5.000 / 0 - 4.600 RPM Plastic Blade (305 mm) (3 / 2 / 1) 0 - 7.000 / 0 - 5.500 / 0 - 4.600 RPM Plastic Blade (255 mm) (3 / 2 / 1) 0 - 5.500 / 0 - 5.000 / 0 - 4.600 RPM
Spindle Size	M10 x 1.25 LH
Dimensions (L x W x H)	1.760 x 628 x 550 mm
Net weight	5,2 kg

**UR201C****36V Li-Ion BL ADT AFT Battery Powered 3-Speed Grass Trimmer, Loop Handle****Battery Powered Grass Trimmer**

- Kemampuan luar biasa untuk pekerjaan terus-menerus berkat kapasitas pendinginan tingkat tinggi yang menekan pembangkitan panas oleh pengontrol dan motor
- Sistem penggerak 36V berdaya tinggi memakai portable power pack PDC01; dapat memakai hingga empat baterai dalam bentuk tas ransel sehingga memungkinkan pekerjaan terus-menerus dalam waktu lama dan sekaligus memastikan alat tetap ringan
- ADT menyesuaikan kecepatan dan torsi pada saat pengerjaan untuk kinerja optimal

**LXT XGT BL ADT AFT XPT**

Safety Goggles, Metal Blade / Nylon Cutting Head / Plastic Blade (country-specific), Blade Cover (for the product with metal blade), Accessory Bag, Hex Wrench, Box Wrench, Shoulder Belt, Battery, Charger

Cutting Width	Metal Blade: 255 mm (10") Nylon Cutting Head: 430 mm (17") Plastic Blade: 305 mm (12")
No Load Speed	Metal Blade (3 / 2 / 1): 0 - 7.000 / 0 - 5.500 / 0 - 4.600 RPM Nylon Cutting Head (3 / 2 / 1) 0 - 5.500 / 0 - 5.000 / 0 - 4.600 RPM Plastic Blade (305 mm) (3 / 2 / 1) 0 - 7.000 / 0 - 5.500 / 0 - 4.600 RPM Plastic Blade (255 mm) (3 / 2 / 1) 0 - 5.500 / 0 - 5.000 / 0 - 4.600 RPM
Spindle Size	M10 x 1.25 LH
Dimensions (L x W x H)	1.795 x 400 x 269 mm
Net weight	4,7 kg

# 18V LITHIUM-ION



18V Lithium-ion

# LXT

Portable Cut-off

Rear Handle Saw

Recipro Saw

Power Cutter

Rotary Hammer

Angle Grinder

Slide Compound Miter Saw

Combination Hammer

Circular Saw

Shear Wrench

Plunge Cut Saw

Angle Drill

Wall Scanner

Stapler

Pin Nailer

Concrete Vibrator

Finish Nailer

Wheelbarrow

Caulking Gun

Vacuum Pump

Rebar Tying Tool

Rivet Gun

Hole Puncher

Grease Gun

Brad Nailer

Flashlight Radio

Area Worklight

LED Flashlight

LED Worklight

Fan

Flashlight

Flashlight

Job Site Radio

Job Site Radio

Job Site Speaker

Fan Jacket

Heated Jacket

Heated Vest

Fan Vest

Heated Blanket

Coffee Maker

Grass Shear

Blower

Chain Saw

Hedge Trimmer

Garden Sprayer

Multi Function Power Head

Robotic Cleaner

Trimmer

Recipro Saw

String Trimmer

Grass Trimmer

String Trimmer

Vacuum Cleaner

Portable Vacuum Cleaner

Planer

Drywall Saw

Belt Sander


Cut-Out Tool

Cleaner

Cyclone Cleaner

Plate Joiner

Jig Saw

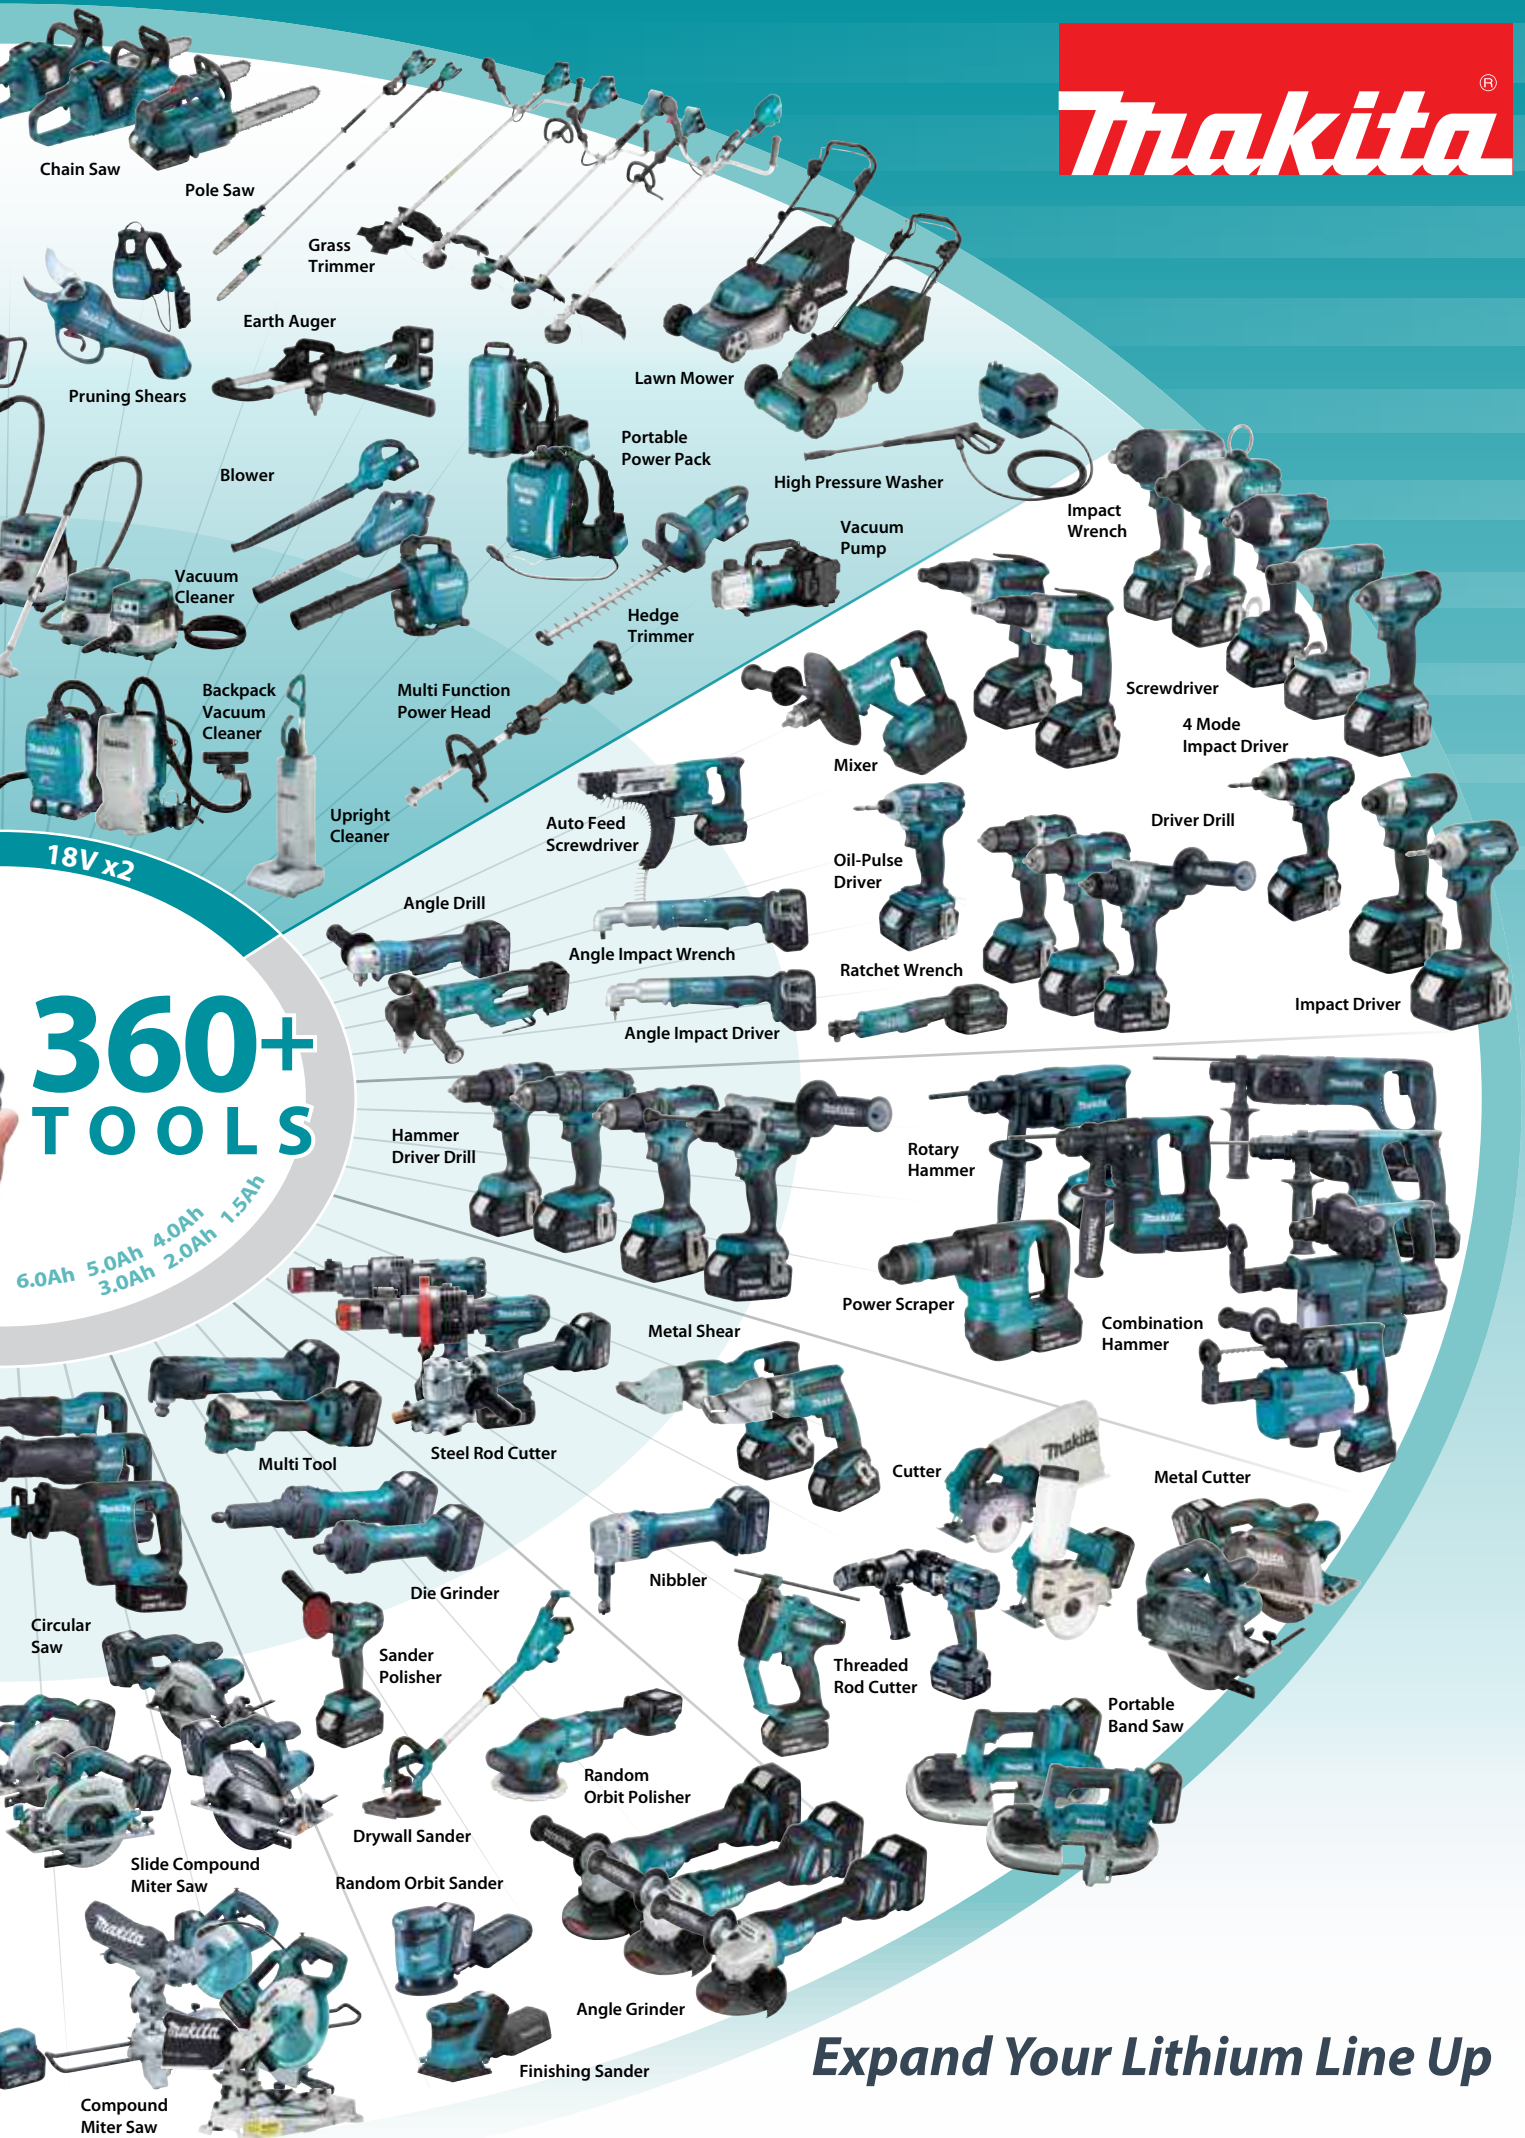

Chain Saw

Pole Saw

Grass Trimmer

Earth Auger

Lawn Mower

Pruning Shears

Portable Power Pack

High Pressure Washer

Blower

Vacuum Pump

Impact Wrench

Vacuum Cleaner

Hedge Trimmer

Screwdriver

4 Mode Impact Driver

Backpack Vacuum Cleaner

Multi Function Power Head

Mixer

Driver Drill

Upright Cleaner

Auto Feed Screwdriver

Oil-Pulse Driver

Angle Drill

Angle Impact Wrench

Ratchet Wrench

Impact Driver

Angle Impact Driver

Hammer Driver Drill

Rotary Hammer

Power Scraper

Combination Hammer

Metal Shear

Multi Tool

Steel Rod Cutter

Cutter

Metal Cutter

Circular Saw

Die Grinder

Nibbler

Threaded Rod Cutter

Sander Polisher

Random Orbit Polisher

Portable Band Saw

Drywall Sander

Random Orbit Sander

Angle Grinder

Finishing Sander

Slide Compound Miter Saw

Compound Miter Saw

18V x2

360+ TOOLS

6.0Ah 5.0Ah 4.0Ah 3.0Ah 2.0Ah 1.5Ah

Expand Your Lithium Line Up

**DDF486**

Cordless Driver Drill

18V LXT BL Brushless Cordless 13 mm (1/2")  
125 N-m (1,100 in.lbs.) Driver Drill



Capacity	Steel: 13 mm (1/2") Wood (Auger-Bit): 50 mm (2") Wood (Self-Feed Bit): 76 mm (3") Siding Board: 170 mm (6-11/16")
Chuck Capacity	1.5 - 13 mm (1/16 - 1/2")
No Load Speed	High / Low: 0 - 2,100 / 0 - 550 RPM
Max Fastening Torque	Hard / Soft: 130 / 65 N-m
Max Lock Torque	125 N-m (1,100 in.lbs.)
Dimensions (L x W x H)	w/ BL1830B / BL1840B / BL1850B / BL1860B: 178 x 81 x 265 mm
Net weight	2,3 - 2,6 kg

**LXT BL MOTOR XPT**

Depth Gauge, Side Handle, Belt Clip, (+)(-) Bit, Bit Holder, Charger, Battery

**DHP486**

Cordless Hammer Driver Drill

18V LXT BL Brushless Cordless 13 mm (1/2")  
125 N-m (1,100 in.lbs.) Hammer Driver Drill



Capacity	Steel: 13 mm (1/2") Wood (Auger-Bit): 50 mm (2") Wood (Self-Feed Bit): 76 mm (3") Siding Board: 170 mm (6-11/16")
Chuck Capacity	1.5 - 13 mm (1/16 - 1/2")
Impacts Per Minute	High / Low: 0 - 31,500 / 0 - 8,250 IPM
No Load Speed	High / Low: 0 - 2,100 / 0 - 550 RPM
Max Fastening Torque	Hard / Soft: 130 / 65 N-m
Max Lock Torque	125 N-m (1,100 in.lbs.)
Dimensions (L x W x H)	w/ BL1830B / BL1840B / BL1850B / BL1860B: 178 x 81 x 265 mm
Net weight	2,3 - 2,7 kg

**LXT BL MOTOR XPT**

Depth Gauge, Side Handle, Belt Clip, (+)(-) Bit, Bit Holder, Charger, Battery

**DDF485**

Cordless Driver Drill

18V LXT BL Brushless Cordless 13 mm (1/2") 50 N-m (440 in.lbs.)  
Driver Drill



Capacity	Steel: 13 mm (1/2") Wood (Self-Feed Bit): 76 mm (3") Wood: 38 mm (1-1/2")
Chuck Capacity	1.5 - 13 mm (1/16 - 1/2")
No Load Speed	High / Low: 0 - 1,900 / 0 - 500 RPM
Max Fastening Torque	Hard / Soft: 50 / 27 N-m
Max Lock Torque	50 N-m (440 in.lbs.)
Dimensions (L x W x H)	w/ BL1830B / BL1840B / BL1850B / BL1860B: 169 x 79 x 255 mm
Net weight	1,4 - 1,7 kg

**LXT BL MOTOR XPT**

Belt Clip, (+)(-) Bit, Battery, Charger

**DHP485**

Cordless Hammer Driver Drill

18V LXT BL Brushless Cordless 13 mm (1/2") 50 N-m (440 in.lbs.)  
Hammer Driver Drill



Capacity	Steel / Wood / Masonry: 13 / 38 / 13 mm (1/2" / 1-1/2" / 1/2") Wood (Self-Feed Bit): 76 mm (3")
Chuck Capacity	1.5 - 13 mm (1/16 - 1/2")
Impacts Per Minute	High / Low: 0 - 28,500 / 0 - 7,500 IPM
No Load Speed	High / Low: 0 - 1,900 / 0 - 500 RPM
Max Fastening Torque	Hard / Soft: 50 / 27 N-m
Max Lock Torque	50 N-m (440 in.lbs.)
Dimensions (L x W x H)	w/ BL1830B / BL1840B / BL1850B / BL1860B: 182 x 79 x 255 mm
Net weight	1,5 - 1,8 kg

**LXT BL MOTOR XPT**

Belt Clip, (+)(-) Bit, Battery, Charger

**DDF484**

Cordless Driver Drill

18V LXT BL Brushless Cordless 13 mm (1/2") 60 N-m (530 in.lbs.)  
Driver Drill



Capacity	Steel: 13 mm (1/2") Wood (Self-Feed Bit): 76 mm (3") Wood: 38 mm (1-1/2")
Chuck Capacity	1.5 - 13 mm (1/16 - 1/2")
No Load Speed	High / Low: 0 - 2,000 / 0 - 500 RPM
Max Fastening Torque	Hard / Soft: 54 / 30 N-m
Max Lock Torque	60 N-m (530 in.lbs.)
Dimensions (L x W x H)	172 x 79 x 261 mm
Net weight	1,5 - 1,8 kg

**LXT BL MOTOR XPT**

(+)(-) Bit, Belt Clip, Battery, Charger

**DHP484**

Cordless Hammer Driver Drill

18V LXT BL Brushless Cordless 13 mm (1/2") 60 N-m (530 in.lbs.)  
Hammer Driver Drill



Capacity	Steel / Wood / Masonry: 13 / 38 / 13 mm (1/2" / 1-1/2" / 1/2") Wood (Self-Feed Bit): 76 mm (3")
Chuck Capacity	1.5 - 13 mm (1/16 - 1/2")
Impacts Per Minute	High / Low: 0 - 30,000 / 0 - 7,500 IPM
No Load Speed	High / Low: 0 - 2,000 / 0 - 500 RPM
Max Fastening Torque	Hard / Soft: 54 / 30 N-m
Max Lock Torque	60 N-m (530 in.lbs.)
Dimensions (L x W x H)	182 x 79 x 261 mm
Net weight	1,6 - 1,9 kg

**LXT BL MOTOR XPT**

Belt Clip, (+)(-) Bit, Battery, Charger



**DDF487** Cordless Driver Drill  
18V LXT BL Brushless Cordless 13 mm (1/2") 40 N-m (350 in.lbs.) Driver Drill



Capacity	Steel / Wood (Auger Bit) / Wood (Self-Feed Bit) / Wood (Hole Saw): 13 / 36 / 35 / 51 mm (1/2" / 1-7/16" / 1-3/8" / 2")
Chuck Capacity	1,5 - 13 mm (1/16" - 1/2")
No Load Speed	High / Low: 0 - 1.700 / 0 - 500 RPM
Max Fastening Torque	Hard / Soft: 40 / 25 N-m
Max Lock Torque	40 N-m (350 in.lbs.)
Dimensions (L x W x H)	w/ BL1830B / BL1840B / BL1850B / BL1860B: 150 x 81 x 248 mm
Net weight	1,3 - 1,6 kg

**LXT BL MOTOR XPT**



Belt Clip, (+)(-) Bit, Battery, Charger

**DDF481** Cordless Driver Drill  
18V LXT BL Brushless Cordless 13 mm (1/2") 125 N-m (1,100 in.lbs.) Driver Drill



Capacity	Steel: 13 mm (1/2") Wood: 76 mm (3")
Chuck Capacity	1,5 - 13 mm (1/16" - 1/2")
No Load Speed	High / Low: 0 - 2.100 / 0 - 550 RPM
Max Fastening Torque	115 N-m
Max Lock Torque	125 N-m (1,100 in.lbs.)
Dimensions (L x W x H)	225 x 79 x 259 mm
Net weight	2,4 kg

**LXT BL MOTOR XPT**



Charger, Battery, (+)(-) Bit, Side Grip, Depth Rod

**DHP487** Cordless Hammer Driver Drill  
18V LXT BL Brushless Cordless 13 mm (1/2") 40 N-m (350 in.lbs.) Hammer Driver Drill



Capacity	Steel / Wood (Auger Bit) / Wood (Self-Feed Bit) / Wood (Hole Saw) / Masonry: 13 / 36 / 35 / 51 / 13 mm (1/2" / 1-7/16" / 1-3/8" / 2" / 1/2")
Chuck Capacity	1,5 - 13 mm (1/16" - 1/2")
Impacts Per Minute	High / Low: 0 - 25.500 / 0 - 7.500 IPM
No Load Speed	High / Low: 0 - 1.700 / 0 - 500 RPM
Max Fastening Torque	Hard / Soft: 40 / 25 N-m
Max Lock Torque	40 N-m (350 in.lbs.)
Dimensions (L x W x H)	w/ BL1830B / BL1840B / BL1850B / BL1860B: 164 x 81 x 248 mm
Net weight	1,4 - 1,7 kg

**LXT BL MOTOR XPT**



Depth Gauge, Side Handle, Belt Clip, (+)(-) Bit, Bit Holder, Charger, Battery

**DHP458** Cordless Hammer Driver Drill  
18V LXT Li-Ion Cordless 13 mm (1/2") 84 N-m (750 in.lbs.) Hammer Driver Drill



Capacity	Steel / Wood / Masonry: 13 / 76 / 16 mm (1/2" / 3 / 5/8") Wood (Self-Feed Bit): 92 mm (3-5/8")
Chuck Capacity	1,5 - 13 mm (1/16" - 1/2")
Impacts Per Minute	High / Low: 0 - 30.000 / 0 - 6.000 IPM
No Load Speed	High / Low: 0 - 2.000 / 0 - 400 RPM
Max Lock Torque	84 N-m (750 in.lbs.)
Dimensions (L x W x H)	225 x 79 x 259 mm
Net weight	2,2 - 2,6 kg

**LXT XPT**



Charger, Battery, (+)(-) Bit, Side Grip, Depth Rod

**DHP453** Cordless Hammer Driver Drill  
18V LXT Li-Ion Cordless 13 mm (1/2") 38 N-m (340 in.lbs.) Hammer Driver Drill



Capacity	Steel / Wood / Masonry: 13 / 76 / 16 mm (1/2" / 3 / 5/8") Wood (Self-Feed Bit): 72 mm (2-13/16")
Chuck Capacity	1,5 - 13 mm (1/16" - 1/2")
Impacts Per Minute	High / Low: 0 - 19.500 / 0 - 6.000 IPM
No Load Speed	High / Low: 0 - 1.300 / 0 - 400 RPM
Max Lock Torque	38 N-m (340 in.lbs.)
Dimensions (L x W x H)	240 x 79 x 244 mm
Net weight	1,7 - 2 kg

**LXT**



Charger, Battery, (+)(-) Bit

**DF488D** Cordless Driver Drill  
18V Li-Ion Cordless 13 mm (1/2") 38 N-m (340 in.lbs.) Driver Drill, G-Battery



Capacity	Steel / Wood: 13 / 36 mm (1/2" / 1-7/16")
Chuck Capacity	1,5 - 13 mm (1/16" - 1/2")
No Load Speed	High / Low: 0 - 1.400 / 0 - 400 RPM
Max Fastening Torque	Hard / Soft: 42 / 24 N-m
Max Lock Torque	38 N-m (340 in.lbs.)
Dimensions (L x W x H)	w/ BL1815G: 221 x 83 x 240 mm
Net weight	1,7 kg



(+)(-) Bit, Battery, Charger

**HP488D** Cordless Hammer Driver Drill  
18V Li-Ion Cordless 13 mm (1/2") 38 N-m (340 in.lbs.) Hammer Driver Drill, G-Battery



Capacity	Steel / Wood / Masonry: 13 / 36 / 13 mm (1/2" / 1-7/16" / 1/2")
Chuck Capacity	1,5 - 13 mm (1/16" - 1/2")
Impacts Per Minute	High / Low: 0 - 21.000 / 0 - 6.000 IPM
No Load Speed	High / Low: 0 - 1.400 / 0 - 400 RPM
Max Fastening Torque	Hard / Soft: 42 / 24 N-m
Max Lock Torque	38 N-m (340 in.lbs.)
Dimensions (L x W x H)	w/ BL1815G: 239 x 83 x 240 mm
Net weight	1,8 kg



(+)(-) Bit, Battery, Charger



### DTD157 Cordless Impact Driver

18V LXT BL Brushless Cordless A-Mode (Assist Mode) 140 N-m (1,240 in.lbs.) Impact Driver



Capacity	Machine Screw: M4 - M8 mm (5/32 - 5/16")
	Standard Bolt: M5 - M16 (3/16 - 9/16")
Hex Shank	High Strength Bolt: M5 - M12 (3/16 - 1/2")
	Coarse thread (in length): 22 - 90 mm (7/8 - 3-1/2")
Max Fastening Torque	140 N-m (1,240 in.lbs.)
Dimensions (L x W x H)	w/ BL1830B / BL1840B / BL1850B / BL1860B: 133 x 81 x 232 mm
Net weight	1,2 - 1,5 kg



Belt Clip, Battery, Charger

### DTD172 Cordless Impact Driver

18V LXT BL Brushless Cordless Wood/Bolt/T-Mode 180 N-m Impact Driver



Capacity	Machine Screw: M4 - M8 (5/32 - 5/16")
	Standard Bolt: M5 - M16 (3/16 - 5/8")
Hex Shank	High Strength Bolt: M5 - M14 (3/16 - 9/16")
	Coarse thread (in length): 22 - 125 mm (7/8 - 4-7/8")
No Load Speed (RPM)	6,35 mm (1/4")
Impacts Per Minute (IPM)	0 - 3,600 / 3,200 / 2,100 / 1,100 / 1,800 / 3,600 / 2,900 / 3,600
	Max / Hard / Mid / Soft / Wood / Bolt / T (1) / T (2) mode: 0 - 3,800 / 3,600 / 2,600 / 1,100 / 3,800 / 3,800 / 2,600
Max Fastening Torque	180 N-m (1,590 in.lbs.)
Fastening Torque	Hard / Mid / Soft: 170 / 50 / 20 N-m
Dimensions (L x W x H)	w/ BL1830B / BL1840B / BL1850B / BL1860B: 114 x 81 x 236 mm
Net weight	1,2 - 1,5 kg



Phillips Bit, Belt Clip, Battery, Charger

### DTD171 Cordless Impact Driver

18V LXT BL Brushless Cordless Wood/Bolt/T-Mode 180 N-m Impact Driver



Capacity	Machine Screw: M4 - M8 mm (5/32 - 5/16")
	Standard Bolt: M5 - M16 (3/16 - 5/8")
Hex Shank	High Strength Bolt: M5 - M14 (3/16 - 9/16")
	Coarse thread (in length): 22 - 125 mm (7/8 - 4-7/8")
No Load Speed (RPM)	6,35 mm (1/4")
Impacts Per Minute (IPM)	0 - 3,600 / 3,200 / 2,100 / 1,100 / 1,800 / 3,600 / 2,900 / 3,600
	Max / Hard / Mid / Soft / Wood / Bolt / T (2) mode: 0 - 3,800 / 3,600 / 2,600 / 1,100 / 3,800 / 3,800 / 2,600
Max Fastening Torque	180 N-m (1,590 in.lbs.)
Fastening Torque	Hard / Mid / Soft: 170 / 50 / 20 N-m
Dimensions (L x W x H)	116 x 79 x 236 mm
Net weight	1,6 kg



Phillips Bit, Belt Clip, Battery, Charger

### DTD154 Cordless Impact Driver

18V LXT BL Brushless Cordless T-Mode 3-Speed 175 N-m (1,550 in.lbs.) Impact Driver



Capacity	Machine Screw: M4 - M8 mm (5/32 - 5/16")
	Standard Bolt: M5 - M16 (3/16 - 5/8")
Hex Shank	High Strength Bolt: M5 - M14 (3/16 - 9/16")
	Coarse thread (in length): 22 - 125 mm (7/8 - 4-7/8")
No Load Speed	6,35 mm (1/4")
Impacts Per Minute	0 - 3,600 / 0 - 2,100 / 0 - 1,100 RPM
	0 - 3,800 / 0 - 2,600 / 0 - 1,100 IPM
Max Fastening Torque	175 N-m (1,550 in.lbs.)
Dimensions (L x W x H)	117 x 79 x 236 mm
Net weight	1,3 - 1,6 kg



Belt Clip, Battery, Charger

### DTD149 Cordless Impact Driver

18V LXT BL Brushless Cordless T-Mode 3-Speed 175 N-m (1,550 in.lbs.) Impact Driver



Capacity	Machine Screw: M4 - M8 mm (5/32 - 5/16")
	Standard Bolt: M5 - M16 (3/16 - 5/8")
Hex Shank	High Strength Bolt: M5 - M12 (3/16 - 1/2")
	Coarse thread (in length): 22 - 125 mm (7/8 - 4-7/8")
No Load Speed	6,35 mm (1/4")
Impacts Per Minute	0 - 2,500 RPM
	0 - 3,200 IPM
Max Fastening Torque	165 N-m (1,460 in.lbs.)
Dimensions (L x W x H)	135 x 79 x 238 mm
Net weight	1,5 kg



Belt Clip, Battery, Charger

### DTW1001 / DTW1002 Cordless Impact Wrench

18V LXT BL Brushless Cordless 3-Speed  
DTW1001: 3/4" (19 mm) 1,050 N-m (780 ft.lbs.)  
DTW1002: 1/2" (12.7 mm) 1,000 N-m (740 ft.lbs.) Impact Wrench



DTW1001

DTW1002

Fastening Capacities	Standard Bolt: M12 - M30 (1/2 - 1-1/4")
	High Strength Bolt: M10 - M24 (3/8 - 1")
Square Drive	M10 - M16 (3/8 - 5/8")
Impacts Per Minute	DTW1001: 19 mm / DTW1002: 12,7 mm
	Hard / Mid / Soft: 0 - 2,200 / 2,000 / 1,800 IPM
No Load Speed	Hard / Mid / Soft: 0 - 1,800 / 1,000 / 900 RPM
Max Fastening Torque	DTW1001: 1,050 N-m / DTW1002: 1,000 N-m
Dimensions (L x W x H)	229 x 91 x 289 mm
Net weight	DTW1001: 3,4 - 3,7 kg DTW1002: 3,3 - 3,6 kg



Charger, Battery, Hook

### DTW700 / DTW701 Cordless Impact Wrench

18V LXT BL Cordless 1/2" (12.7 mm) 700 N-m (520 ft.lbs.)  
Impact Wrench, Forward/Reverse Rotation Auto Stop Mode



DTW700: C ring  
DTW701: Pin detent

Fastening Capacities	Standard Bolt: M10 - M24 (3/8 - 1")
	High Strength Bolt (Grade 10.9): M10 - M16 (3/8 - 5/8")
Square Drive	High Strength Bolt (Grade F10T): M12, M16 (7/16, 5/8")
	12,7 mm (1/2")
Impacts Per Minute	Max / Hard / Mid / Soft: 2,700 / 2,400 / 1,700 / 1,000 IPM
	No Load Speed: Max / Hard / Mid / Soft: 2,200 / 1,900 / 1,200 / 500 RPM
Max Fastening Torque	700 N-m (520 ft.lbs.)
Dimensions (L x W x H)	w/ BL1830B / BL1840B / BL1850B / BL1860B: 170 x 81 x 276 mm
Net weight	2,3 - 2,7 kg



Belt Clip, Battery, Charger

**DTW450**

Cordless Impact Wrench

18V LXT Li-Ion Cordless 1/2" (12.7 mm) 440 N-m (325 ft.lbs.) Impact Wrench



441 mm	
Fastening Capacities	Standard Bolt: M12 - M22 (1/2 - 7/8") High Strength Bolt: M12 - M16 (1/2 - 5/8")
Square Drive	12.7 mm (1/2")
Impacts Per Minute	2.200 IPM
No Load Speed	1.600 RPM
Max Fastening Torque	440 N-m (325 ft.lbs.)
Dimensions (L x W x H)	266 x 82 x 290 mm
Net weight	3,1 - 3,4 kg

**LXT**



Hook, Battery, Charger



**DTW300**

Cordless Impact Wrench

18V LXT BL Cordless 1/2" (12.7 mm) 330 N-m (240 ft.lbs.) Impact Wrench, Forward/Reverse Rotation Auto Stop Mode



Fastening Capacities	Standard Bolt: M10 - M20 (3/8 - 3/4") High Strength Bolt: M10 - M16 (3/8 - 5/8")
Square Drive	12,7 mm (1/2")
Impacts Per Minute	Max / Hard / Mid / Soft: 0 - 4.000 / 3.400 / 2.600 / 1.800 IPM
No Load Speed	Max / Hard / Mid / Soft: 0 - 3.200 / 2.600 / 1.800 / 1.000 RPM
Max Fastening Torque	330 N-m (240 ft.lbs.)
Dimensions (L x W x H)	w/ BL1830B / BL1840B / BL1850B / BL1860B: 144 x 81 x 246 mm
Net weight	1,5 - 1,8 kg

**LXT BL MOTOR XPT**



Belt Clip, Battery, Charger



**DTW302**

Cordless Impact Wrench

18V LXT BL Cordless 1/2" (12.7 mm) 330 N-m (240 ft.lbs.) Impact Wrench, Forward/Reverse Rotation Auto Stop Mode



Fastening Capacities	Standard Bolt: M10 - M20 (3/8 - 3/4") High Strength Bolt: M10 - M16 (3/8 - 5/8")
Square Drive	9,5 mm (3/8")
Impacts Per Minute	Max / Hard / Mid / Soft: 0 - 4.000 / 3.400 / 2.600 / 1.800 IPM
No Load Speed	Max / Hard / Mid / Soft: 0 - 3.200 / 2.600 / 1.800 / 1.000 RPM
Max Fastening Torque	300 N-m (220 ft.lbs.)
Dimensions (L x W x H)	w/ BL1830B / BL1840B / BL1850B / BL1860B: 138 x 81 x 246 mm
Net weight	1,4 - 1,8 kg

**LXT BL MOTOR XPT**



Belt Clip, Battery, Charger



**DTW190**

Cordless Impact Wrench

18V LXT Li-Ion Cordless 1/2" (12.7 mm) 190 N-m (140 ft.lbs.) Impact Wrench



Fastening Capacities	Standard Bolt: M8 - M16 (5/16 - 5/8") High Strength Bolt: M8 - M12 (5/16 - 1/2")
Square Drive	12,7 mm (1/2")
Impacts Per Minute	0 - 3.000 IPM
No Load Speed	0 - 2.300 RPM
Max Fastening Torque	190 N-m (140 ft.lbs.)
Overall Length	176 mm
Net weight	1,4 - 1,8 kg

Tool does not come with socket.

**LXT**



Shoulder Strap (country-specific), Tool Hanger (country-specific), Battery, Charger



**DTW181Z**

Cordless Impact Wrench

18V LXT BL Brushless Cordless 1/2" (12.7 mm) 210 N-m (155 ft.lbs.) Impact Wrench, Reverse Rotation Auto Stop Mode



Fastening Capacities	Standard Bolt: M8 - M16 (5/16 - 5/8") High Strength Bolt: M6 - M12 (1/4 - 1/2")
Impacts Per Minute	Hard / Soft: 0 - 3.600 / 2.000 IPM
No Load Speed	Hard / Soft: 0 - 2.400 / 1.300 RPM
Square Drive	12,7 mm (1/2")
Max Fastening Torque	210 N-m (155 ft.lbs.)
Dimensions (L x W x H)	w/ BL1830B / BL1840B / BL1850B / BL1860B: 151 x 79 x 235 mm
Net weight	1,2 - 1,5 kg

**LXT BL MOTOR XPT**



Belt Clip, Battery, Charger



**DTW180**

Cordless Impact Wrench

18V LXT BL Brushless Cordless 3/8" (9.5 mm) 180 N-m (130 ft.lbs.) Impact Wrench, Reverse Rotation Auto Stop Mode



Fastening Capacities	Standard Bolt: M8 - M16 (5/16 - 5/8") High Strength Bolt: M6 - M12 (1/4 - 1/2")
Impacts Per Minute	Hard / Soft: 0 - 3.600 / 2.000 IPM
No Load Speed	Hard / Soft: 0 - 2.400 / 1.300 RPM
Square Drive	9,5 mm (3/8")
Max Fastening Torque	180 N-m (130 ft.lbs.)
Dimensions (L x W x H)	w/ BL1830B / BL1840B / BL1850B / BL1860B: 144 x 79 x 235 mm
Net weight	1,2 - 1,5 kg

**LXT BL MOTOR XPT**



Belt Clip, Battery, Charger



**DDA450**

Cordless Angle Drill

18V LXT BL ADT Cordless 13 mm (1/2") Angle Drill with Keyed Chuck



Capacity	Steel: 13 mm (1/2") Wood (Self-Feed Bit) Hi: 50 mm (2") Wood (Self-Feed Bit) Lo: 65 mm (2-9/16") Wood (Hole Saw) Hi: 101 mm (4") Wood (Hole Saw) Lo: 127 mm (5") Wood (Auger-Bit): 38 mm (1-1/2")
Chuck Capacity	2 - 13 mm (1/16 - 1/2")
No Load Speed	High / Low: 0 - 1.400 / 0 - 450 RPM
Max Fastening Torque	High: 26 N-m / Low: 70 N-m
Dimensions (L x W x H)	434 x 82 x 179 mm
Net weight	3,2 - 3,5 kg

**LXT BL MOTOR ADT XPT**



Chuck Key, Chuck Key Holder, Side Grip, Battery, Charger

## DDA351

## Cordless Angle Drill

18V LXT Li-Ion Cordless 10 mm (3/8") Angle Drill, Keyless Chuck



440 <sup>mm</sup>	
Capacity	Steel: 10 mm (3/8") Wood: 25 mm (1") Wood (Self-Feed Bit): 50 mm (2")
Chuck Capacity	1,5 - 10 mm (1/16 - 3/8")
No Load Speed	0 - 1.800 RPM
Dimensions (L x W x H)	326 x 79 x 115 mm
Net weight	1,6 - 1,9 kg

LXT



Charger, Battery, Side Grip

## DWR180

## Cordless Ratchet Wrench

18V LXT Li-Ion Cordless 47.5 N-m (420 in.lbs.) Ratchet Wrench



Capacity	Standard Bolt: M5 - M12 (3/16 - 1/2") High Strength Bolt: M5 - M10 (3/16 - 3/8")
Square Drive	9,5 / 6,35 mm (3/8 / 1/4")
No Load Speed	0 - 800 RPM
Max Fastening Torque	47,5 N-m (420 in.lbs.)
Flats Width	13 mm (1/2")
Angle Head Size	Diameter: 31 mm (1-7/32") Height: 25,5 mm (1")
Dimensions (L x W x H)	w/ BL1830B / BL1840B / BL1850B / BL1860B: 369 x 79 x 87 mm
Net weight	1,2 - 1,6 kg

LXT XPT



Socket Adapter, Battery, Charger, Tool Bag

## DTL063

## Cordless Angle Impact Wrench

18V LXT Li-Ion Cordless 3/8" (9.5 mm) 60 N-m Angle Impact Wrench



Fastening Capacities	Standard Bolt: M4 - M12 (5/32 - 1/2")
	High Strength Bolt: M4 - M8 (5/32 - 5/16")
Square Drive	9,5 mm (3/8")
No Load Speed	0 - 2.000 RPM
Impacts Per Minute	0 - 3.000 IPM
Max Fastening Torque	60 N-m
Dimensions (L x W x H)	387 x 78 x 116 mm
Net weight	1,4 - 2 kg

LXT



Charger, Battery

## DFR452

## Cordless Auto Feed Screwdriver

18V LXT BL Cordless 0-6,000 RPM 41 mm (1-5/8") Auto Feed Screwdriver with Silent Clutch



Screw Strip	4 x 20 - 41 mm (5/32 x 13/16 - 1-5/8")
Driving Shank (Hex)	6,35 mm (1/4")
No Load Speed	0 - 6.000 RPM
Dimensions (L x W x H)	360 x 88 x 165 - 211 mm
Net weight	1,9 - 2,2 kg

LXT BL MOTOR XPT



new

Phillips Bit x3, Belt Clip, Battery, Charger

## DFR551

## Cordless Auto Feed Screwdriver

18V LXT BL Cordless 0-6,000 RPM 55 mm (2-3/16") Auto Feed Screwdriver with Silent Clutch



Screw Strip	4 x 25 - 55 mm (5/32 x 1 - 2-3/16")
Driving Shank (Hex)	6,35 mm (1/4")
No Load Speed	0 - 6.000 RPM
Dimensions (L x W x H)	396 x 88 x 165 - 211 mm
Net weight	1,9 - 2,2 kg

LXT BL MOTOR XPT



new

Phillips Bit x3, Belt Clip, Battery, Charger

## DHR242

## Cordless Combination Hammer

18V LXT BL Brushless Cordless 24 mm (15/16") Combination Hammer, SDS-PLUS Bits



Impact Energy	2 J
Capacity	Masonry: 24 mm (15/16") Wood (Self-Feed Bit): 27 mm (1-1/16")
Blows Per Minute	0 - 4.700 BPM
No Load Speed	0 - 950 RPM
Chuck Capacity	1,5 - 13 mm (1/16 - 1/2")
Dimensions (L x W x H)	328 x 85 x 213 mm
Net weight	3,1 - 3,8 kg

LXT BL MOTOR XPT



Charger, Battery, Depth Gauge, Side Grip

## DHR165

## Cordless Rotary Hammer

18V LXT Li-Ion Cordless 16 mm (5/8") Rotary Hammer, SDS-PLUS Bits



430 <sup>mm</sup>	
Impact Energy	1,3 J
Capacity	Concrete (w/ TCT Bit): 16 mm (5/8") Concrete (w/ Diamond Core Bit): 32 mm (1-1/4") Steel: 13 mm (1/2") Wood: 24 mm (15/16") Masonry: 16 mm (5/8")
Chuck Capacity	1,5 - 13 mm (1/16 - 1/2")
Blows Per Minute	0 - 5.300 BPM
No Load Speed	0 - 1.600 RPM
Dimensions (L x W x H)	297 x 79 x 253 mm
Net weight	2,3 - 3 kg

LXT XPT



Charger, Battery, Side Grip, Depth Gauge

## DGA517

## Cordless Angle Grinder

18V LXT BL Cordless Angle Grinder, Variable Speed, Anti-Restart Function, Slide Switch Lock-On



Wheel Diameter	125 mm (5")
Hole Diameter	22,23 mm (7/8")
No Load Speed	3.000 - 8.500 RPM
Dimensions (L x W x H)	w/ BL1830B / BL1840B / BL1850B / BL1860B: 382 x 140 x 151 mm
Net weight	2,4 - 3,1 kg

LXT BL MOTOR ADT AFT XPT



Grinding Wheel, Wheel Cover, Side Grip, Lock Nut Wrench, Battery, Charger

DGA511

Cordless Angle Grinder

18V LXT BL Cordless Angle Grinder, Variable Speed, Anti-Restart Function, Slide Switch Lock-On



Wheel Diameter	125 mm (5")
Hole Diameter	22,23 mm (7/8")
No Load Speed	3.000 - 8.500 RPM
Dimensions (L x W x H)	w/ BL1830B / BL1840B / BL1850B / BL1860B: 382 x 140 x 145 mm
Net weight	2,3 - 3 kg

LXT BL MOTOR ADT AFT XPT



Grinding Wheel, Wheel Cover, Side Grip, Lock Nut Wrench, Battery, Charger

DGA417

Cordless Angle Grinder

18V LXT BL Cordless Angle Grinder, Variable Speed, Anti-Restart Function, Slide Switch Lock-On



Wheel Diameter	100 mm (4")
Hole Diameter	16 mm (5/8")
No Load Speed	3.000 - 8.500 RPM
Dimensions (L x W x H)	w/ BL1830B / BL1840B / BL1850B / BL1860B: 382 x 117 x 146 mm
Net weight	2,2 - 2,9 kg

LXT BL MOTOR ADT AFT (BRAKE) XPT



Grinding Wheel, Wheel Cover, Side Grip, Lock Nut Wrench, Battery, Charger

DGA404

Cordless Angle Grinder

18V LXT BL ADT AFT Cordless Angle Grinder, Anti-Restart Function, Slide Switch Lock-On



Wheel Diameter	100 mm (4")
Hole Diameter	16 mm (5/8")
No Load Speed	8.500 RPM
Dimensions (L x W x H)	362 x 117 x 140 mm
Net weight	2,1 - 2,71 kg

LXT BL MOTOR ADT AFT XPT



Grinding Wheel, Toolless Wheel Cover / Wheel Cover, Side Handle, Lock Nut Wrench, Battery, Charger

DGD800

Cordless Die Grinder

18V LXT Li-Ion Cordless 8 mm (1/4") Die Grinder



430 $\mu$ m	
Collet Capacity	3 - 8 mm
Wheel Diameter	36 mm (1-7/16")
No Load Speed	26.000 RPM
Dimensions (L x W x H)	402 x 82 x 118 mm
Net weight	1,7 - 2,2 kg

LXT

Charger, Battery, Collet Cone, Wrench x2

DSC251

Cordless Steel Rod Cutter

18V LXT BL ADT Cordless 25 mm (1") Steel Rod Cutter



Blade Diameter	110 mm (4-5/16")
Cutting Capacity	Dia.: 10 - 25 mm (3/8 - 1")
No Load Speed	2.200 RPM
Dimensions (L x W x H)	471 x 137 x 139 mm
Net weight	4,0 kg

LXT BL MOTOR ADT



Tipped Saw, Dust Bag, Side Grip, Hex Wrench, Battery, Charger

DSC102

Cordless Threaded Rod Cutter

18V / 14.4V LXT BL Brushless Cordless Threaded Rod Cutter



Capacity	Mild Steel: W3/8, M10, M8, M6 Stainless Steel: W3/8, M8, M6
Min. Cutting Length	20 mm (13/16")
Work Amount	M8 (Mild Steel) w/BL1860B: 2.300 pcs M8 (Stainless) w/BL1860B: 1.900 pcs
Dimensions (L x W x H)	w/ BL1830B / BL1840B / BL1850B / BL1860B: 199 x 103 x 308 mm
Net weight	2,8 - 3,2 kg

LXT BL MOTOR



Cutter Blade, Hex socket head bolt, Blade Cover, Depth Gauge, Thumb screw, Hex Wrench, Battery, Charger

DCC500

Cordless Cutter

18V LXT BL AWS ADT Cordless 125 mm (5") Cutter, Dry Type



Blade Diameter	125 mm (5")
Hole Diameter	20 mm (13/16")
Max Cutting Capacity	0°: 40 mm (1-9/16") 45°: 27 mm (1-1/16")
No Load Speed	8.800 RPM
Dimensions (L x W x H)	w/ BL1830B / BL1840B / BL1850B / BL1860B: 283 x 158 x 172 mm
Net weight	2,5 - 3,0 kg

LXT BL MOTOR AWS ADT (BRAKE) XPT



Diamond Wheel, Dust Bag, Hex Wrench

## Cordless Angle Grinder

DGA519 / DGA419

# X-LOCK

CUKUP SATU KLIK UNTUK MEMASANG AKSESORIS DAN CUKUP TARIK TUAS UNTUK MELEPASNYA



Tak perlu khawatir lagi akan komponen yang lepas. Mekanisme X-LOCK memastikan aksesoris terpasang dengan benar pada alat tanpa perlu memakai mur, pinggiran roda, atau kunci pas.



Tak perlu khawatir lagi terganggu oleh mur, bahkan pada saat pengasahan rata.



Tak perlu khawatir lagi membuang-buang waktu untuk memasang dan melepas aksesoris. Tingkatkan efisiensi dan kemudahan bekerja Anda!




Tak perlu khawatir lagi akan mur yang kurang kencang atau terlalu kencang. Aksesoris X-LOCK selalu terpasang dengan kuat dan tidak akan terpasang pada posisi yang salah.



**ADT AFT BL MOTOR**  
**(BRAKE) XPT LXT**

Penutup roda tanpa alat baru memungkinkan penyesuaian sudut yang cepat dan mudah serta pemasangan/pelepasan penutup roda.

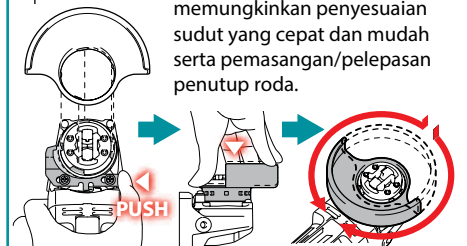

Aksesoris X-LOCK 125 mm kompatibel dengan gerinda konvensional.



\*Roda 100 mm tidak kompatibel dengan gerinda konvensional.



**DGA519 / DGA419**

**18V LXT BL ADT AFT Cordless Angle Grinder, Variable Speed, Anti-Restart Function, Electric Brake, Paddle Switch, X-LOCK**

Cordless Angle Grinder



- X-LOCK untuk mengganti aksesoris tanpa perlu alat
- Mekanisme X-LOCK memungkinkan pemasangan/pelepasan roda X-LOCK dengan satu tombol/tuas tanpa alat; meminimalkan waktu yang terbuang untuk mengganti roda; mencegah roda terpasang kurang kencang atau terlalu kencang
- Roda X-LOCK dapat dilepas dengan mudah, hanya dengan menarik tuas
- Penutup roda tanpa alat baru memungkinkan penyesuaian sudut yang cepat dan mudah serta pemasangan/pelepasan penutup roda.



**LXT BL ADT AFT (BRAKE)**  
**X-LOCK XPT**



Grinding Wheel, Wheel Cover, Side Grip, Battery, Charger

Wheel Diameter	DGA519: 125 mm (5") DGA419: 100 mm (4")
No Load Speed	3.500 - 8.500 RPM
Circumference of Grip Portion	160 mm (6-5/16")
Dimensions (L x W x H)	DGA519: w/ BL1830B / BL1840B / BL1850B / BL1860B: 396 x 140 x 147 mm DGA419: w/ BL1830B / BL1840B / BL1850B / BL1860B: 396 x 117 x 147 mm
Net weight	DGA519: 2,5 - 3,1 kg DGA419: 2,4 - 3,0 kg

DCS553

Cordless Metal Cutter

18V LXT BL ADT Cordless 150 mm (5-7/8") Metal Cutter, Electric Brake, Soft Start, Dual LED Lights



Blade Diameter	150 mm (5-7/8")
Hole Diameter	15.88, 20 mm (5/8, 13/16")
Max Cutting Capacity	0°: 57.5 mm (2-1/4")
No Load Speed	4,200 RPM
Dimensions (L x W x H)	267 x 186 x 250 mm
Net weight	2,8 - 3,1 kg



TCT Saw Blade, Hex Wrench, Safety Goggles, Guide Rule, Battery, Charger

DCS550

Cordless Metal Cutter

18V LXT Li-Ion Cordless 136 mm (5-3/8") Metal Cutter, Electric Brake, Dual LED Lights



Blade Diameter	136 mm (5-3/8")
Max Cutting Capacity	90°: 51 mm
No Load Speed	3,600 RPM
Dimensions (L x W x H)	348 x 180 x 201 mm
Net weight	2,2 - 2,6 kg



TCT Saw Blade, Hex Wrench, Safety Goggles, Battery, Charger

DCS552

Cordless Metal Cutter

18V LXT Li-Ion Cordless 136 mm (5-3/8") Metal Cutter with Dust Box, Electric Brake, Dual LED Lights



430 mm	
Blade Diameter	136 mm (5-3/8")
Hole Diameter	15.88, 20 mm (5/8, 13/16")
Max Cutting Capacity	0°: 50.5 mm (2")
No Load Speed	3,600 RPM
Dimensions (L x W x H)	348 x 196 x 203 mm
Net weight	2,4 - 2,7 kg



TCT Saw Blade, Hex Wrench, Safety Goggles, Battery, Charger

DPB180

Cordless Portable Band Saw

18V LXT Li-Ion Cordless Variable Speed Portable Band Saw



430 mm	
Capacity	Round: 120 mm (4-3/4") Rectangular: 120 x 120 mm (4-3/4 x 4-3/4")
Blade Length	1,140 mm (44-7/8")
Blade Speed	1,4 - 275 m/min (2,7 - 530 ft/min)
Blade Size	Length: 1,140 mm (44-7/8") Width: 13 mm (1/2") Thickness: 0,5 mm (0,02")
Dimensions (L x W x H)	523 x 231 x 313 mm
Net weight	6,8 - 7,1 kg



Charger, Battery, Band Saw Blade, Hex Wrench

DPB183

Cordless Portable Band Saw

18V LXT BL Cordless Portable Band Saw



Capacity	Round: 66 mm (2-5/8") Square: 66 x 66 mm (2-5/8 x 2-5/8")
Blade Length	835 mm (32-7/8")
Blade Speed	0 - 3,2 m/s (0 - 630 ft/min.)
Blade Size	Length: 835 mm (32-7/8") Width: 13 mm (1/2") Thickness: 0,5 mm (0,02")
Dimensions (L x W x H)	392 x 174 x 242 mm
Net weight	3,6 - 3,9 kg



Band Saw Blade, Hex Wrench, Hook (country-specific), Grip (country-specific), Battery, Charger



DPB184

Cordless Portable Band Saw

18V LXT BL Cordless Portable Band Saw



Capacity	Round: 51 mm (2") Square: 51 x 51 mm (2 x 2")
Blade Length	730 mm (28-3/4")
Blade Speed	0 - 3,2 m/s (0 - 630 ft/min.)
Blade Size	Length: 730 mm (28-3/4") Width: 13 mm (1/2") Thickness: 0,5 mm (0,02")
Dimensions (L x W x H)	w/ BL1830B / BL1840B / BL1850B / BL1860B: 373 x 162 x 223 mm
Net weight	3,3 - 3,6 kg



Band Saw Blade, Hex Wrench, Hook (country-specific), Battery, Charger



## DHS660

Cordless Circular Saw

18V LXT BL AWS ADT Cordless 165 mm (6-1/2")  
Circular Saw, Electric Brake, Soft Start, Dual LED Lights



Blade Diameter	165 mm (6-1/2")
Max Cutting Capacity	0°: 57 mm (2-1/4")
	45°: 41 / 41 mm (1-5/8 / 1-5/8")
	50°: 37 / 37 mm (1-7/16 / 1-7/16")
No Load Speed	5,000 RPM
Dimensions (L x W x H)	270 x 186 x 250 mm
Net weight	2,9 - 3,2 kg

LXT BL MOTOR ADT (BRAKE) XPT



TCT Saw Blade, Hex Wrench, Rip Fence (Guide Rule), Dust Nozzle (country-specific), Battery, Charger

## DJV181

Cordless Jig Saw

18V LXT BL Brushless Cordless Barrel Handle Jig Saw,  
3 Orbital Settings Plus Straight Cutting, Dual LED Lights



Capacity	Wood: 135 mm (5-5/16")
	Steel: 10 mm (3/8")
Length of Stroke	26 mm (1")
Strokes Per Minute	800 - 3,500 SPM
Dimensions (L x W x H)	298 x 77 x 189 mm
Net weight	2,3 - 2,6 kg

Cutting capacity in wood: when cutting with optional blade No.B-16L

LXT BL MOTOR SOFT NOLOAD



Charger, Battery, Jig saw blade set, Cover Plate, Dust Nozzle (country-specific), Anti-Splintering Device, Hex Wrench

## DJR183

Cordless Recipro Saw

18V LXT Li-Ion Cordless Compact Recipro Saw



Length of Stroke	13 mm (1/2")
Strokes Per Minute	0 - 3,000 SPM
Capacity	Pipe / Wood: 50 / 50 mm (2 / 2")
Dimensions (L x W x H)	392 x 81 x 209 mm
Net weight	1,5 - 1,7 kg

LXT



Charger, Battery, Recipro Saw Blades

## DJR187

Cordless Recipro Saw

18V LXT BL Brushless Cordless Recipro Saw



Length of Stroke	32 mm (1-1/4")
Strokes Per Minute	High / Low: 0 - 3,000 / 0 - 2,300 SPM
Capacity	Pipe / Wood: 130 / 255 mm (5-1/8 / 10")
Dimensions (L x W x H)	439 x 83 x 231 mm
Net weight	3,4 - 3,8 kg

LXT BL MOTOR XPT



Recipro Saw Blades, Charger, Battery

## DJR188

Cordless Recipro Saw

18V LXT BL Brushless Cordless Recipro Saw



Length of Stroke	20 mm (13/16")
Strokes Per Minute	0 - 3,000 SPM
Capacity	Pipe / Wood: 130 / 255 mm (5-1/8 / 10")
Dimensions (L x W x H)	w/ BL1830B / BL1840B / BL1850B / BL1860B: 316 x 81 x 220 mm
Net weight	2,6 - 2,9 kg

LXT BL MOTOR XPT



Recipro Saw Blades, Battery, Charger

## DKP180Z

Cordless Planer

18V LXT Li-Ion Cordless 82 mm (3-1/4") Planer



441 mm	
Planing Width	82 mm (3-1/4")
Planing Depth	2,0 mm (5/64")
Shiplapping	9 mm (11/32")
No Load Speed	15,000 RPM
Dimensions (L x W x H)	w/ BL1830B / BL1840B / BL1850B / BL1860B: 333 x 157 x 160 mm
Net weight	3,2 - 3,5 kg

LXT



Planer Blade, Blade Gauge, Guide Rule, Socket Wrench, Dust Nozzle

## DRT50Z

Cordless Trimmer

18V LXT BL Brushless Cordless 6 mm (1/4"), 8 mm (3/8")  
Variable Speed Trimmer with Dual LED Lights



Collet Capacity	6, 8 mm or 1/4, 3/8"
No Load Speed	10,000 - 30,000 RPM
Plunge Capacity	w/ Trimmer Base: 0 - 40 mm (0 - 1-9/16")
	w/ Plunge Base: 0 - 35 mm (0 - 1-3/8")
Dimensions (L x W x H)	w/ BL1815N / BL1820B: 134 x 89 x 208 w/ BL1830B / BL1840B / BL1850B / BL1860B: 134 x 89 x 226 mm
Net weight	1,8 - 2,1 kg

LXT BL MOTOR



Collet Cone, Trimmer Base Assembly, Straight Guide Assembly, Templet Guide, Wrench x2, Trimmer Guide, Battery, Charger

## DPO600

Cordless Random Orbit Polisher

18V LXT BL Brushless Cordless 150 mm (6")  
Random Orbit Polisher



Pad Size	150 mm (6")
Orbits Per Minute	Normal Mode: 0 - 6,800 OPM Finishing Mode: 0 - 5,200 OPM
Strokes Per Minute	Normal Mode: 0 - 13,600 SPM Finishing Mode: 0 - 10,400 SPM
No Load Speed	Normal Mode: 0 - 780 RPM Finishing Mode: 0 - 600 RPM
Orbit Diameter	5,5 mm (7/32")
Dimensions (L x W x H)	530 x 148 x 126 mm
Net weight	3,1 - 3,6 kg

LXT BL MOTOR XPT



Side Grip (country-specific), Pad (country-specific), Hex Wrench

**DPO500** Cordless Random Orbit Polisher

18V LXT BL Brushless Cordless 125 mm (5") Random Orbit Polisher



Pad Size	125 mm (5")
Orbits Per Minute	Normal Mode: 0 - 6.800 OPM Finishing Mode: 0 - 5.200 OPM
Strokes Per Minute	Normal Mode: 0 - 13.600 SPM Finishing Mode: 0 - 10.400 SPM
No Load Speed	Normal Mode: 0 - 780 RPM Finishing Mode: 0 - 600 RPM
Orbit Diameter	5,5 mm (7/32")
Dimensions (L x W x H)	530 x 123 x 134 mm
Net weight	3,1 - 3,6 kg

LXT BL MOTOR XPT



Side Grip (country-specific), Pad (country-specific), Hex Wrench

**DPV300** Cordless Sander Polisher

18V LXT BL Cordless Sander Polisher



Pad / Disc Diameter	Twist-On / Twist-Off Style: 50 mm (2") Hook & Loop Style: 80 mm (3-1/8")
Backing Pad Diameter	Twist-On / Twist-Off Style: 46 mm (1-13/16") Hook & Loop Style: 75 mm (2-15/16")
No Load Speed	Polishing: 0 - 2.800 RPM Sanding: 0 - 9.500 RPM
Continuous Use	w/ BL1850B: 34 min.
Head Length	127 mm (5")
Dimensions (L x W x H)	w/ BL1830B / BL1840B / BL1850B / BL1860B: 160 x 79 x 256 mm
Net weight	1,3 - 1,6 kg



Side Grip, Pad, Adapter, Wool Pad, Sponge Pad

**DBO482 / DBO481** Cordless Finishing Sander

18V LXT Li-Ion 1/4 Sheet Finishing Sander



DBO482



DBO481

Pad Size	112 x 102 mm (4-3/8 x 4")
Abrasive Paper Size	Rectangular: 114 x 140 mm (4-1/2 x 5-1/2")
Orbits Per Minute	14.000 OPM
Dimensions (L x W x H)	w/ BL1830B / BL1840B / BL1850B / BL1860B: 156 x 112 x 151 mm
Net weight	DBO482: 1,8 kg DBO481: 1,7 kg

LXT



Abrasive Paper, Dust Bag / Dust Box, Punch Plate

**DBO480** Cordless Finishing Sander

18V LXT Li-Ion 1/4 Sheet Finishing Sander



Pad Size	112 x 102 mm (4-3/8 x 4")
Abrasive Paper Size	Square: 114 x 102 mm (4-1/2 x 4") Rectangular: 114 x 190 mm (4-1/2 x 7-1/2") Triangular: 96 x 96 mm (3-3/4 x 3-3/4")
Orbits Per Minute	14.000 OPM
Dimensions (L x W x H)	w/ BL1830B / BL1840B / BL1850B / BL1860B: 156 x 112 x 151 mm
Net weight	1,7 kg

LXT



Abrasive Paper, Dust Bag / Dust Box, Punch Plate

**DBO381** Cordless Finishing Sander

18V BL AWS 1/3 Sheet Cordless Finishing Sander with Built-In Dust Extraction System



Pad Size	93 x 185 mm (3-5/8 x 7-1/4")
Abrasive Paper Size	Rectangular: 93 x 228 mm (3-5/8 x 9")
Orbits Per Minute	4.000, 8.000, 12.000 OPM
Dimensions (L x W x H)	w/ BL1830B / BL1840B / BL1850B / BL1860B: 336 x 92 x 169 mm
Net weight	1,9 - 2,2 kg

LXT BL MOTOR AWS XPT



new

Dust Bag / Dust Box, Punch Plate, Abrasive Paper, Battery, Charger, Wireless Unit (country-specific), Wireless Unit Adapter (country-specific), Battery Protector (country-specific)

**DBO180** Cordless Random Orbit Sander

18V LXT Li-Ion Cordless 125 mm (5") 3-Speed Random Orbit Sander with Built-In Dust Extraction System



Pad Diameter	123 mm (4-7/8")
Abrasive Disc Size	125 mm (5")
Orbits Per Minute	7.000 / 9.500 / 11.000 OPM
Dimensions (L x W x H)	175 x 123 x 153 mm
Net weight	1,4 - 1,7 kg

LXT



Charger, Battery, Abrasive Disc, Dust Bag / Dust Box



**DBS180** Cordless Belt Sander

18V LXT BL 9 mm x 533 mm (3/8" x 21") Variable Speed Belt Sander



Belt Width	6 / 9 / 13 mm (1/4 / 3/8 / 1/2")
Belt Length	533 mm (21")
Belt Speed	600 - 1.700 m/min
Dimensions (L x W x H)	w/ BL1830B / BL1840B / BL1850B / BL1860B: 500 x 96 x 116 mm
Net weight	1,8 - 2,1 kg

LXT BL MOTOR



Sanding Belt, Grip, Grip Base, Battery, Charger

## DSL801

Cordless Drywall Sander

18V LXT BL AWS Cordless 225 mm (8-7/8") Variable Speed Drywall Sander



Pad Diameter	210 mm (8-1/4")
Abrasive Disc Size	225 mm (8-7/8")
No Load Speed	1.000 - 1.800 RPM
Dimensions (L x W x H)	1.120 - 1.540 x 278 x 273 mm
Net weight	4,6 - 5,8 kg

LXT BL AWS XPT



Abrasive Disc, Hex Wrench, Tool Bag, Wireless Unit (country-specific), Wireless Unit Adapter (country-specific), Battery, Charger



## DTM52

Cordless Multi Tool

18V LXT BL AVT Cordless Toolless Multi Tool



Oscillations Per Minute	10.000 - 20.000 OPM
Oscillation Angle	Left / Right / Total: 1.8° / 1.8° / 3.6°
Circumference of Grip	169 mm (6-5/8")
Portion	
Dimensions (L x W x H)	w/ BL1830B / BL1840B / BL1850B / BL1860B: 322 x 95 x 126 mm
Net weight	1,7 - 2,0 kg

LXT BL AVT XPT



Oscillating Multi Tool Accessories, Dust Attachment (country-specific), Tool Box (country-specific), Battery, Charger



## DTM51

Cordless Multi Tool

18V LXT Li-Ion Cordless Toolless Multi Tool



Oscillations Per Minute	6.000 - 20.000 OPM
Oscillation Angle	Left / Right / Total: 1.6° / 1.6° / 3.2°
Dimensions (L x W x H)	340 x 80 x 122 mm
Net weight	2 - 2,4 kg

LXT



Oscillating Multi Tool Accessories, Dust Attachment (country-specific), Tool Box (country-specific), Battery, Charger



## DPP200

Cordless Hole Puncher

18V LXT Li-Ion Cordless Hole Puncher



Capacity	Steel: 20 mm (13/16") Stainless Steel: 20 mm (13/16")
Max Throat Depth	40 mm (1-9/16")
Dimensions (L x W x H)	w/ BL1830B / BL1840B / BL1850B / BL1860B: 417 x 127 x 315 mm
Net weight	10,5 kg

LXT

Not compatible with 2.0Ah, 1.5Ah batteries

Punch, Dice, Hex Wrench, Spanner, Bar for fastening nuts, Grip, Oil



## DCO181

Cordless Cut-Out Tool

18V LXT BL AWS Cordless 6.35 mm (1/4") Cut-Out Tool



Collet Capacity	3, 6 mm or 1/8, 1/4"
No Load Speed	32.000 RPM
Circumference of Grip	210 mm (8-1/4")
Portion	
Dimensions (L x W x H)	w/ BL1830B / BL1840B / BL1850B / BL1860B: 311 x 79 x 117 mm
Net weight	1,4 - 1,7 kg

LXT BL AWS XPT



Drywall Guide Bit, Collet Cone, Dust Collection Cover, Wrench, Battery, Charger



## DRV250

Cordless Rivet Gun

18V LXT BL Brushless Cordless Rivet Gun



Pulling Force	20 kN (4.500 lbs.)
Stroke	30 mm (1-3/16")
Rivet Diameter Range	2,4 - 6,4 mm (3/32 - 1/4")
Center Height	26 mm (1")
Work Amount	w/ BL1860B: 1.900 pcs w/ BL1850B: 1.600 pcs w/ BL1820(B): 650 pcs
Dimensions (L x W x H)	w/ BL1830B / BL1840B / BL1850B / BL1860B: 323 x 80 x 287 mm
Net weight	2,1 - 2,4 kg

LXT BL XPT



Hook, Grease, Accessory Set, Battery, Charger



## DRV150

Cordless Rivet Gun

18V LXT BL Brushless Cordless Rivet Gun



Pulling Force	10 kN (2.200 lbs.)
Stroke	25 mm (1")
Rivet Diameter Range	2,4 - 4,8 mm (3/32 - 3/16")
Center Height	26 mm (1")
Work Amount	w/ BL1860B: 2.800 pcs w/ BL1850B: 2.300 pcs w/ BL1820(B): 950 pcs
Dimensions (L x W x H)	w/ BL1830B / BL1840B / BL1850B / BL1860B: 313 x 80 x 287 mm
Net weight	1,9 - 2,2 kg

LXT BL XPT



Hook, Grease, Accessory Set, Battery, Charger



**DFN350**

Cordless Brad Nailer

18V LXT Li-Ion Cordless 23 GA 35 mm (1-3/8") Pin Nailer



Capacity	Length: 15 - 35 mm (5/8 - 1-3/8")
	Gauge: 18 Ga
Magazine Capacity	110
Shot q'ty on a single full battery charge	w/ BL1850B: 4.000
Dimensions (L x W x H)	w/ BL1830B / BL1840B / BL1850B / BL1860B: 257 x 79 x 228 mm
Net weight	2,1 - 2,4 kg

**LXI XPT**



Safety Goggles, Nose Adapter, Hex Wrench, Belt Clip, Battery, Charger

**DPT353**

Cordless Pin Nailer

18V LXT Li-Ion Cordless 23 GA 35 mm (1-3/8") Pin Nailer



Capacity	Length: 15, 18, 25, 30, 35 mm (5/8, 11/16, 1, 1-3/16, 1-3/8")
	Dia.: 0.6 mm (1/32")
	Gauge: 23 Ga
Magazine Capacity	120
Dimensions (L x W x H)	257 x 79 x 226 mm
Net weight	2 - 2,3 kg

**XPT**



Nose Adapter, Safety Goggles, Belt Clip, Hex Wrench, Battery, Charger

**DST421**

Cordless Stapler

18V LXT Li-Ion Cordless 10 mm J Wire Stapler



Staple	Width: 4 mm
	Length: 13 - 25 mm (1/2" - 1")
	Size: 1,2 x 0,6 mm
Magazine Capacity	100
Shot q'ty on a single full battery charge	w/ BL1860B: 4.800
Dimensions (L x W x H)	w/ BL1815N: 244 x 79 x 216 mm w/ BL1830B / BL1850B / BL1860B: 260 x 79 x 216 mm
Net weight	2,2 - 2,5 kg

**XPT**



Safety Goggles, Nose Adapter, Belt Clip, Battery, Charger



**DST121**

Cordless Stapler

18V LXT Li-Ion Cordless 10 mm J Wire Stapler



Staple	Width: 10 mm
	Length: 13 - 25 mm (1/2" - 1")
	Size: 1,2 x 0,6 mm
Magazine Capacity	100
Shot q'ty on a single full battery charge	w/ BL1860B: 4.800
Dimensions (L x W x H)	w/ BL1815N: 244 x 79 x 216 mm w/ BL1830B / BL1850B / BL1860B: 260 x 79 x 216 mm
Net weight	2,2 - 2,5 kg

**XPT**



Safety Goggles, Nose Adapter, Belt Clip, Battery, Charger

**DTR181**

Cordless Rebar Tying Tool

18V LXT BL Brushless Cordless Rebar Tying Tool



Tie Wire	Dia. 0,8 mm
Applicable Rebars	D16 x D16 - [D13 x 2] x [D16 x 2]
Dimensions (L x W x H)	w/ BL1830B / BL1840B / BL1850B / BL1860B: 319 x 93 x 318 mm
Net weight	2,3 - 2,6 kg

**LXI BL MOTOR XPT**



Hex Wrench, Hook

**DTR180**

Cordless Rebar Tying Tool

18V LXT BL Brushless Cordless Rebar Tying Tool



Tie Wire	Dia. 0,8 mm
Applicable Rebars	D10 x D10 - [D13 x 2] x [D13 x 2]
Dimensions (L x W x H)	w/ BL1830B / BL1840B / BL1850B / BL1860B: 304 x 93 x 318 mm
Net weight	2,3 - 2,6 kg

**LXI BL MOTOR XPT**



Hex Wrench, Hook

**DCG180**

Cordless Caulking Gun

18V LXT Li-Ion Cordless Caulking Gun



Max Dispensing Force	5.000 N (1.100 lbs)
No load speed	0 - 28 mm/sec. (0 - 66 in/min.)
Holder Size	300, 600, 800 mL
Dimensions (L x W x H)	404 x 108 x 281 mm
Net weight	2,1 - 3 kg

**LXI**



Holder, Holder Joint, Piston, Rubber Ring, Nozzle, Battery, Charger

## Cordless Grease Gun

DGP180




## Solusi Baru untuk Pelumas



### Pasokan Pelumas

#### Untuk cartridge pelumas


Cartridge pelumas dapat dibeli di pasaran lalu dipasang di barel.



Cartridge pelumas


#### Untuk wadah curah

Pelumas pada barel dapat diisi dari wadah curah (dibeli di pasaran)



Kontainer Bulk

Pelumas juga dapat diisi ke barel dengan memakai pompa filler (dibeli di pasaran) yang dipasang di wadah curah.

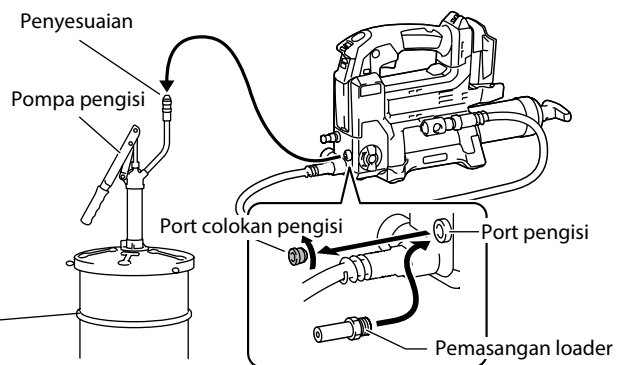

### DGP180

Cordless Grease Gun

### 18V LXT Li-Ion Cordless Grease Gun



- Lampu LED terpasang dengan sakelar terpisah untuk membantu menemukan dengan tepat pelumas yang sulit dilihat dalam cahaya redup
- Pelumas yang kompatibel: No. 0-2
- Desain tegak dan tali selempang menambah kenyamanan pemakaian
- Pegangan dirancang ergonomis dengan genggamannya lembut menambah kenyamanan pemakaian
- Sirkuit perlindungan baterai melindungi dari kelebihan beban, pemakaian berlebih, dan pemanasan berlebih



LXT



Shoulder Strap, Battery, Charger

Max Operating Pressure	69 MPa (10,000 PSI)
Flow Rate	Slow Speed Mode: 145 mL/min (5.0 oz/min) Auto Speed Change Mode: 290 mL/min (10.0 oz/min)
Grease Capacity w/ Barrel A	Cartridge / Bulk: 410 / 455 g (14.5 / 16.0 oz)
Grease Capacity w/ Barrel B	Cartridge / Bulk: 450 / 570 g (15.9 / 20.1 oz)
Grease Capacity w/ Barrel C	Cartridge / Bulk: 500 / 570 g (17.6 / 20.1 oz)
Hose Length	120 cm (47-1/4")
Dimensions (L x W x H)	w/ Barrel A: 411 x 114 x 245 mm w/ Barrel B: 449 x 114 x 245 mm
Net weight	4,8 - 6,1 kg

DVP181

Cordless Vacuum Pump

18V LXT Li-Ion Cordless Vacuum Pump



Flow Rate	113 L/min
Motor speed	3.200 min <sup>-1</sup>
Oil Tank Capacity	300 mL
Dimensions (L x W x H)	383 x 193 x 210 mm
Net weight	8,1 - 8,2 kg



Vacuum Pump Oil, Adapter

DVP180

Cordless Vacuum Pump

18V LXT Li-Ion Cordless Vacuum Pump



Flow Rate	50 L/min
Ultimate vacuum	20 Pa (150 microns)
Motor speed	3.840 min <sup>-1</sup>
Oil Tank Capacity	115 mL
Dimensions (L x W x H)	265 x 93 x 175 mm
Net weight	2,9 - 3,5 kg

Net weight: With BL1830/ BL1840/ BL1850 and Oil



Not compatible with 2.0Ah, 1.5Ah batteries

Vacuum Pump Oil, Adapter, Battery, Charger

DHG181

Cordless Heat Gun

18V LXT Cordless Heat Gun

new



Air Temperature	Ambient temperature - 550°C
Air Flow	Stage 1: 120 L/min Stage 2: 200 L/min
Continuous run time on a full battery charge	w/ BL1860B: 21 min
Dimensions (L x W x H)	173 x 79 x 255 mm
Net weight	0,99 - 1,3 kg



Tombol penyesuaian suhu

Glass protection nozzle, Wide slot nozzle, Reflector nozzle, Reduction nozzle, Battery, Charger



DMP181

Cordless Inflator

18V LXT Li-Ion Cordless Inflator



Rated operating time	10 min On / 5 min Off
Max air pressure	1.110 kPa (161 PSI) [11,1 bar]
Air discharge amount	200 kPa: 22 L/min / 700 kPa: 11 L/min
Dimensions (L x W x H)	w/ BL1830B / BL1840B / BL1850B / BL1860B: 316 x 108 x 231 mm
Net weight	2,5 - 2,8 kg



British Adapter, French Adapter, Ball Adapter, Swim Ring Adapter, Battery, Charger

DMP180

Cordless Inflator

18V LXT Li-Ion Cordless Inflator



Rated operating time	5 min On / 5 min Off
Max air pressure	830 kPa (121 PSI) [8,3 bar]
Air discharge amount	200 kPa: 12 L/min / 700 kPa: 8 L/min
Dimensions (L x W x H)	w/ BL1830B / BL1840B / BL1850B / BL1860B: 266 x 80 x 174 mm
Net weight	1,4 - 1,7 kg



British Adapter, French Adapter, Ball Adapter, Swim Ring Adapter, Battery, Charger

DTC300

Cordless Rechargeable Crimping

18V LXT Li-Ion Cordless Rechargeable Crimping



Rentang Crimping Maks.	14 - 250 mm
Jumlah Output	127 kN
Dimensi (P x L x T)	330 x 85 x 330 mm
Berat Bersih	4,7 kg



Crimping



Item perlengkapan dan spesifikasi standar dapat berbeda di setiap negara atau wilayah. Berat bersih dan ukuran dapat berbeda menurut jenis baterai.

## DUB184

## 18V LXT BL Brushless Cordless Variable Speed Blower

Cordless Blower

- Ideal untuk membersihkan daun jatuh di trotoar, rumput dan pagar atau puing-puing ringan lainnya
- Pembersihan yang efisien berkat kipas aksial efisiensi tinggi yang mirip dengan model 18Vx2 LXT DUB362
- Kontrol kecepatan variabel dengan pemicu, dengan tuas kontrol Cruise untuk operasi penguncian
- Motor BL menghasilkan hingga 52,1 m/s dan 13,0 m<sup>3</sup>/m
- Ringkas dan ringan untuk operasi satu tangan



LXT BL MOTOR XPT



Shoulder Belt, Nozzle, Battery, Charger, Hex Wrench

Max Air Volume	13,0 m <sup>3</sup> /min (459 CFM)
Max Air Velocity	52,1 m/s (116 MPH)
Blowing Force	10,9 N
No Load Speed	0 - 18.000 RPM
Continuous Use	w/ BL1860B: 12 min w/ BL1850B: 10 min
Dimensions (L x W x H)	w/ BL1830B / BL1840B / BL1850B / BL1860B: 825 x 160 x 285 mm
Net weight	2,5 - 3,0 kg

## Ringkas &amp; Berdaya Tinggi



## DUB185

## 18V LXT Cordless Variable 3-Speed Blower

Cordless Blower

- Mudah mengubah alat tiup menjadi alat hisap
- Terdapat pengaturan volume udara 3 tahap & pemicu kecepatan variabel
- Maksimal kecepatan udara 352,8 km/jam & maksimal volume udara 3,2 m<sup>3</sup>/menit
- Ringan hanya 2,1kg dengan baterai
- Waktu pengoperasian hingga 2 jam dengan baterai 5.0Ah



LXT



Nozzle, Dust Bag, Battery, Charger

Max Air Volume	3,2 m <sup>3</sup> /min
Max Air Velocity	98 m/s
Blowing Force	3,1 N
Max Sealed Suction	5,8 kPa
No Load Speed	0 - 18.000 RPM
Continuous Use	w/ BL1850B, High / Mid / Low: 21 / 50 / 130 min
Dimensions (L x W x H)	w/ BL1830B / BL1840B / BL1850B / BL1860B: 517 x 156 x 210 mm
Net weight	1,6 - 2,1 kg

## DUB186

## 18V LXT Cordless Variable 3-Speed Blower

Cordless Blower

- Volume udara yang meningkat secara drastis untuk efisiensi hembusan/tiupan yang lebih tinggi
- Volume udara yang lebih besar telah diperoleh dengan meningkatkan diameter saluran keluar udara
- Menghasilkan kecepatan udara maksimum 68 m/s untuk pembersihan lokasi kerja yang lebih cepat
- Variabel 3-kecepatan untuk kontrol kecepatan optimal
- Ringkas dan ringan untuk operasi satu tangan



LXT



Garden Nozzle, Battery, Charger

Max Air Volume	3,2 m <sup>3</sup> /min
Max Air Velocity	68 m/s
Blowing Force	2,5 N
No Load Speed	0 - 18.000 RPM
Continuous Use	w/ BL1850B, High / Mid / Low: 20 / 50 / 130 min
Dimensions (L x W x H)	w/ BL1830B / BL1840B / BL1850B / BL1860B: 861 x 156 x 210 mm
Net weight	1,6 - 2,1 kg

## DUR181

## 18V LXT Li-Ion Cordless String Trimmer

Cordless String Trimmer

- Desain yang seimbang dengan fitur yang dapat disesuaikan sepenuhnya agar sesuai dengan operator mana pun
- Waktu pengoperasian hingga 45 menit dengan sekali pengisian daya tanpa beban menggunakan BL1830B
- Motor buatan Makita menghasilkan 7.800 RPM untuk pemotongan lebih cepat
- Poros teleskopik (123 hingga 143cm) untuk posisi pemotongan yang optimal
- Kepala berputar 5 posisi yang dapat disesuaikan untuk penyesuaian sudut pemotongan saat memangkas di ruang sempit



LXT

Safety Goggles, Shoulder Belt, Nylon Cutting Head, Nylon Cord, Battery, Charger

Cutting Width	Trimmer Head: 260 mm (10-1/4")
No Load Speed	7.800 RPM
Max Run Time	w/ BL1830B: 45 min
Dimensions (L x W x H)	1.229 - 1.433 x 267 x 186 - 257 mm
Net weight	2,8 - 3,1 kg

**DUR189**

Cordless Grass Trimmer

**18V LXT BL ADT Cordless Grass Trimmer, Short Telescopic Pipe, Loop Handle**



- Automatic torque Drive Technology (ADT) menyesuaikan kecepatan dan torsi pada saat pengerjaan untuk kinerja yang optimal
- Waktu pengoperasian hingga 3,5 jam dengan sekali pengisian daya tanpa beban menggunakan baterai 18V LXT 6.0Ah
- Pipa teleskopik pendek yang nyaman memberikan penanganan yang mudah di ruang sempit
- Kemampuan manuver yang lebih baik terlepas dari ukuran pengguna dengan pipa teleskopik



**LXT BL MOTOR ADT XPT**



Shoulder Strap, Nylon Cutting Head, Plastic Blade, Safety Goggles, Accessory Bag, Hex Wrench, Battery, Charger

Cutting Width	Trimmer Head: 300 mm (11-3/4") Plastic Blade: 255 mm (10")
No Load Speed	High / Mid / Low / ADT Mode: 6.000 / 5.000 / 4.000 / 4.000 - 6.000 RPM
Spindle Size	M8 x 1.25 RH
Max Run Time	Nylon Cutting Head, BL1860B: 168 min Plastic Blade, BL1860B: 219 min
Dimensions (L x W x H)	1.518 - 1.618 x 258 x 396 mm
Net weight	3 - 3,3 kg

**DUR190L / DUR191L**

Cordless Grass Trimmer

**18V LXT BL ADT AFT Cordless 3-Speed Grass Trimmer, Loop Handle**



- Kemampuan manuver yang lebih baik karena desain yang ringan dan kinerja pemotongan yang sama kuatnya dengan seri DUR187U saat ini
- Satu macam pelindung untuk mata pisau logam/mata pisau plastik/kepala pemangkas
- Kunci poros tanpa alat untuk penggantian pisau plastik
- Pegangan lembut desain ergonomis; Yang sama seperti yang digunakan pada seri DUR368A



**LXT BL MOTOR ADT AFT XPT**



Safety Goggles, Band Assembly, Tipped Saw, Accessory Bag, Box Driver, Hex Wrench, Cap, Tool Cover, Battery

Cutting Width	Metal Blade: 230 mm (9") Nylon Cutting Head: 300 mm (11-3/4") Plastic Blade: 255 mm (10")
No Load Speed	3.500 - 6.000 RPM
Spindle Size	M10 x 1.25 LH
Dimensions (L x W x H)	DUR190L: 1.836 x 348 x 236 mm DUR191L: 1.836 x 345 x 236 mm
Net weight	DUR190L: 2,9 - 3,2 kg DUR191L: 3,2 - 3,5 kg

**DUR190U / DUR191U**

Cordless Grass Trimmer

**18V LXT BL ADT AFT Cordless 3-Speed Grass Trimmer, Bike Handle, Split Shaft**



- Kemampuan manuver yang lebih baik karena desain yang ringan dan kinerja pemotongan yang sama kuatnya dengan seri DUR187U saat ini
- Satu macam pelindung untuk mata pisau logam/mata pisau plastik/kepala pemangkas
- Kunci poros tanpa alat untuk penggantian pisau plastik
- Pegangan lembut desain ergonomis; Yang sama seperti yang digunakan pada seri DUR368A



**LXT BL MOTOR ADT AFT XPT**



Safety Goggles, Band Assembly, Tipped Saw, Accessory Bag, Box Driver, Hex Wrench, Cap, Tool Cover, Battery

Cutting Width	Metal Blade: 230 mm (9") Nylon Cutting Head: 300 mm (11-3/4") Plastic Blade: 255 mm (10")
No Load Speed	3.500 - 6.000 RPM
Spindle Size	M10 x 1.25 LH
Dimensions (L x W x H)	1.836 x 610 x 473 mm
Net weight	DUR190U: 3,1 - 3,4 kg DUR191U: 3,4 - 3,7 kg

**DUR192L**

Cordless Grass Trimmer

**18V LXT BL Cordless 2-Speed Grass Trimmer, Loop Handle**



- Model dengan harga bersaing dan output daya lebih besar; sakelar dan pelindung disederhanakan dengan menghususkan pemangkas ini untuk digunakan hanya dengan kepala pemotongan nilon
- Poros tipe split memungkinkan kemasan lebih kecil, sesuai untuk pengiriman ke pengguna serta menghemat tempat untuk penyimpanan dan display di toko
- Daya keluaran maksimum meningkat secara drastis dari seri DUR190L
- Pegangan lembut desain ergonomis



**LXT BL MOTOR XPT**



Safety Goggles, Band Assembly, Nylon Cutting Head, Hex Wrench, Battery, Charger

Cutting Width	Nylon Cutting Head: 300 mm (11-3/4")
No Load Speed	High / Low: 0 - 4.500 / 0 - 6.000 RPM
Spindle Size	M10 x 1.25 LH
Max Run Time (min)	High / Low, w/ 300 mm (11-3/4") Nylon Cutting Head, w/o Load, w/ BL1850B: 46 / 97 min
	High / Low, w/ 330 mm (13") Nylon Cutting Head, w/o Load, w/ BL1850B: 33 / 70 min
Dimensions (L x W x H)	w/o Nylon Cutting Head, w/ BL1830B / BL1840B / BL1850B / BL1860B: 1.670 x 186 x 246 mm
Net weight	2,7 - 3,0 kg

**DUR193**

Cordless Grass Trimmer

**18V LXT Li-Ion Cordless Grass Trimmer**



Cutting Width	Trimmer Head: 260 mm (10-1/4")
No Load Speed	7.800 RPM
Max Run Time	w/ BL1830B: 45 min
Dimensions (L x W x H)	1.194 - 1.384 x 271 x 372 mm
Net weight	2,4 - 2,7 kg

**LXT XPT**



Safety Goggles (country-specific), Shoulder Belt, Nylon Cutting Head, Nylon Cord, Battery, Charger

## DUC254

## Cordless Chain Saw



## 18V LXT BL Brushless Cordless Chain Saw

- Kinerja pemotongan tinggi; Gergaji sangat ringan dengan pegangan di bagian atas, setara dengan gergaji mesin bensin ukuran kecil
- Sistem penggerak langsung motor BL rotor luar memberikan kinerja pemotongan tinggi yang setara dengan gergaji mesin bensin ukuran kecil; 0-24,0 m/s (0-1.440 m/mnt)
- Ideal untuk pemangkasan daun
- Sangat ringan untuk mengurangi kelelahan operator



LXT BL MOTOR XPT



Saw Chain, Guide Bar, Guide Bar Cover, Wrench, Accessory Bag, Battery, Charger

Guide Bar Length	250 mm (10")
Cutting Length	235 mm
Chain Pitch	3/8"
Chain Gauge	1,1 mm (0,043")
Chain Speed	0 - 24 m/s (0 - 1.440 m/min) (0 - 4.720 FPM)
Chain Oil Tank Volume	140 mL (4,7 US oz)
Dimensions (L x W x H)	w/o Guide Bar: 258 x 184 x 191 mm
Net weight	2,8 - 3,2 kg

## DUN600L

## Cordless Hedge Trimmer



Sharp edge curved Blade

## 18V LXT BL Brushless Cordless 60 cm (23-5/8") Pole Hedge Trimmer

- Desain ringan untuk mengurangi kelelahan operator
- Bentuk mata pisau yang optimal untuk pemangkasan yang mulus; Mata gergaji desain baru dengan tiga sisi dirancang untuk menangkap dan memegang ranting dengan mudah, serta memiliki ketajaman luar biasa; Mata pisau berbentuk lengkung dapat mengurangi tahanan gesekan sehingga mengurangi kehilangan energi
- Motor BL menghilangkan sikat karbon, memungkinkan motor BL bekerja lebih dingin dan lebih efisien untuk masa pakai yang lebih lama



LXT BL MOTOR XPT



Blade Cover, Hex Wrench, Battery, Charger

Blade Length	600 mm (23-5/8")
Max Cutting Capacity	23,5 mm (15/16")
Strokes Per Minute	High / Mid / Low: 4.400 / 3.600 / 2.000 SPM
Cycles Per Minute	High / Mid / Low: 2.200 / 1.800 / 1.000 CPM
Continuous Use	w/ BL1860B High / Mid / Low: 55 / 80 / 180 min
Dimensions (L x W x H)	2.050 x 230 x 178 mm
Net weight	3,7 - 4,1 kg

## DUN500W

## Cordless Hedge Trimmer



Sharp edge curved Blade

## 18V LXT BL Brushless Cordless 50 cm (19-3/4") Pole Hedge Trimmer

- Desain ringan untuk mengurangi kelelahan operator
- Bentuk mata pisau yang optimal untuk pemangkasan yang mulus; Mata gergaji desain baru dengan tiga sisi dirancang untuk menangkap dan memegang ranting dengan mudah, serta memiliki ketajaman luar biasa; Mata pisau berbentuk lengkung dapat mengurangi tahanan gesekan sehingga mengurangi kehilangan energi
- Motor BL menghilangkan sikat karbon, memungkinkan motor BL bekerja lebih dingin dan lebih efisien untuk masa pakai yang lebih lama



LXT BL MOTOR XPT



Blade Cover, Shoulder Harness, Battery, Charger

Blade Length	500 mm (19-3/4")
Max Cutting Capacity	23,5 mm (15/16")
Strokes Per Minute	High / Mid / Low: 4.400 / 3.600 / 2.000 SPM
Cycles Per Minute	High / Mid / Low: 2.200 / 1.800 / 1.000 CPM
Continuous Use	w/ BL1860B High / Mid / Low: 60 / 90 / 190 min
Dimensions (L x W x H)	2.115 x 97 x 137 mm
Net weight	3,9 - 4,3 kg

## DUN461W

## Cordless Pole Hedge Trimmer



## 18V LXT Cordless 46 cm (18-1/8") Pole Hedge Trimmer

- Pipa teleskopik, sehingga tidak diperlukan tangga
- 3.600 SPM untuk pemotongan lebih cepat
- Sudut pemangkas kepala dapat diatur; 60° ke atas hingga 75° ke bawah dari posisi horizontal; Dapat dilipat dalam posisi 180° untuk memudahkan transportasi dan penyimpanan; Kopling bawaan bekerja untuk menghentikan gerakan pisau bahkan jika tuas throttle disentuh selama operasi pelipatan; 10 pengaturan sudut; Pengaturan sudut pemangkas kepala dapat dilakukan dengan mudah hanya dengan satu tombol



LXT XPT

Blade Cover, Chip Receiver (country-specific), Shear Blade (country-specific), Battery, Charger

Blade Length	460 mm (18-1/8")
Effective Cutting Length	470 mm 18-1/2"
Max Cutting Capacity	18 mm (11/16")
Strokes Per Minute	3.600 SPM
Continuous Use	w/ BL1850B: 122 min
Dimensions (L x W x H)	1.889 - 2.511 x 87 x 134 mm
Net weight	3,0 - 3,3 kg

## DUH601 / DUH751

## Cordless Hedge Trimmer



Standard Blade

## 18V LXT BL Brushless Cordless Hedge Trimmer

- Kinerja pemotongan yang handal
- Bentuk mata pisau yang optimal untuk pemotongan yang halus dan waktu kerja yang lama
- Mata gergaji mempunyai desain baru dengan tiga sisi dirancang untuk menangkap dan memegang ranting dengan mudah, serta memiliki ketajaman luar biasa
- Mata pisau berbentuk lengkung dapat mengurangi tahanan gesekan sehingga mengurangi kehilangan energi



LXT BL MOTOR XPT



Blade Cover, Safety Goggles (country-specific), Chip Receiver (country-specific), Battery, Charger

Blade Length	DUH601: 600 mm (23-5/8") DUH751: 750 mm (29-1/2")
Max Cutting Capacity	23,5 mm (15/16")
Strokes Per Minute	High / Mid / Low: 0 - 4.400 / 0 - 3.600 / 0 - 2.000 SPM
Continuous Use	DUH601: w/ BL1860B High / Mid / Low: 55 / 80 / 200 min DUH751: w/ BL1860B High / Mid / Low: 45 / 70 / 160 min
Dimensions (L x W x H)	DUH601: 1.121 x 225 x 192 mm DUH751: 1.261 x 225 x 192 mm
Net weight	3,8 - 4,5 kg

**DUH604S / DUH754S**

**18V LXT BL Brushless Cordless Hedge Trimmer**

Cordless Hedge Trimmer



- Kinerja pemotongan yang andal
- Bentuk mata pisau yang optimal untuk pemangkasan yang mulus dan waktu kerja lebih lama (kecuali untuk Amerika Utara); Mata gergaji desain baru dengan tiga sisi dirancang untuk menangkap dan memegang ranting dengan mudah, serta memiliki ketajaman luar biasa; Mata pisau berbentuk lengkung dapat mengurangi tahanan gesekan sehingga mengurangi kehilangan energi
- 3 pilihan kecepatan untuk pengendalian kecepatan optimal



**LXT BL MOTOR XPT**



Blade Cover, Safety Goggles (country-specific), Chip Receiver, Battery, Charger

Blade Length	DUH604S: 600 mm (23-5/8") DUH754S: 750 mm (29-1/2")
Max Cutting Capacity	18 mm (11/16")
Strokes Per Minute	High / Mid / Low: 4.400 / 3.600 / 2.000 SPM
Continuous Use	DUH604S: w/ BL1860B High / Mid / Low: 70 / 90 / 200 min DUH754S: w/ BL1860B High / Mid / Low: 65 / 80 / 190 min
Dimensions (L x W x H)	DUH604S: 1.061 x 282 x 143 mm DUH754S: 1.200 x 282 x 143 mm
Net weight	3,4 - 3,9 kg

**DUH523 / DUH483**

**18V LXT Li-Ion Cordless Hedge Trimmer**

Cordless Hedge Trimmer



- 2.700 SPM untuk pemotongan lebih cepat
- Peningkatan desain pegangan lembut untuk kenyamanan pengguna yang maksimal
- Struktur antigetar dirancang dengan lima bantalan di dalam rumah motor untuk membantu meminimalkan getaran



**LXT**



Charger, Battery, Blade Cover

Blade Length	DUH523: 520 mm (20-1/2") DUH483: 480 mm (18-7/8")
Strokes Per Minute	2.700 SPM
Dimensions (L x W x H)	DUH523: 938 x 195 x 193 mm DUH483: 888 x 195 x 193 m
Net weight	DUH523: 3 - 3,4 kg DUH483: 3 - 3,3 kg

**DUM111Z**

**18V LXT Li-Ion Cordless 11 cm (4-5/16") Grass Shear**

Cordless Grass Shear



- Pegangan yang dirancang secara ergonomis dengan pegangan yang pasti memberikan lebih banyak kontrol dan kenyamanan
- 2.500 SPM untuk pemotongan yang efisien
- 2 in 1: dapat memakai trimmer blade maupun shear blade
- Lebar pemotongan 11 cm untuk kinerja optimal



**LXT**



Shear Blade, Blade Cover, Storage Cover, Oil Vessel, Battery, Charger

Cutting Width	Grass Shear Blade: 110 mm (4-5/16") Hedge Trimmer Blade: 200 mm (7-7/8")
Depth Adjustment	15, 20, 25 mm (9/16, 13/16, 1")
Strokes Per Minute	2.500 SPM
Continuous Use	w/ BL1850B/ BL1815N: 220 / 67 min
Dimensions (L x W x H)	w/ BL1815N / BL1820B: 330 x 120 x 130 mm
Net weight	1,4 - 1,8 kg

**UM110D**

**18V Li-Ion Cordless 11 cm (4-5/16") Grass Shear, G-Battery**

Cordless Grass Shear



- Pegangan yang dirancang secara ergonomis dengan pegangan yang pasti memberikan lebih banyak kontrol dan kenyamanan
- 2.500 SPM untuk pemotongan yang efisien
- 2 in 1: dapat memakai trimmer blade maupun shear blade
- Lebar pemotongan 11 cm untuk kinerja optimal



Shear Blade, Blade Cover, Storage Cover, Oil Vessel, Battery, Charger

Cutting Width	Grass Shear Blade: 110 mm (4-5/16") Hedge Trimmer Blade: 200 mm (7-7/8")
Depth Adjustment	15, 20, 25 mm (9/16, 13/16, 1")
Strokes Per Minute	2.500 SPM
Continuous Use	w/ BL1815G: 65 min
Dimensions (L x W x H)	w/ BL1815G: 331 x 120 x 130 mm
Net weight	1,4 - 1,5 kg

**Sistem penggantian pisau tanpa alat**

- Pisau Grass shear dapat dipasang/dilepas tanpa alat.
- Pisau Hedge trimmer dapat dipasang/dilepas memakai koin untuk mengencangkan/melonggarkan dua sekrup



**DLM330****18V LXT Li-Ion Cordless 33 cm (13") Lawn Mower**

Cordless Lawn Mower



- 3 in 1 (Pemotongan / Pengumpulan / Mulsa)
- Meningkatkan kekakuan pegangan dengan menambahkan pipa berbentuk lingkaran
- Tuas kunci pegangan yang mudah dioperasikan; Setiap sisi pegangan dapat dikunci/dibuka hanya dengan satu tindakan tanpa alat
- 8 pengaturan ketinggian pemotongan dari 20 mm hingga 75 mm
- Tingkat kebisingan yang rendah cocok untuk digunakan di area perumahan dan ruang publik

**LXT XPT**

Blade, Mulch Plug, Socket Wrench, Battery, Charger

Hole Diameter	15,0 mm (9/16")
Cutting Width	330 mm (13")
Cutting Height	20 - 75 mm (13/16 - 2-15/16")
No Load Speed	4.300 RPM
Dimensions (L x W x H)	1.285 - 1.350 x 375 x 935 - 1.035 mm
	When Stored (w/o Grass Box):
	775 x 375 x 500 mm
Net weight	11,6 - 12,5 kg

**DLM230****18V LXT Cordless 23 cm (9") Lawn Mower**

Cordless Lawn Mower



- Roda depan besar (13 cm (5-1/8")) untuk penanganan yang mudah
- 2 in 1 (Memotong rumput / Mengumpulkan rumput)
- Terdapat fungsi peringatan kapasitas baterai; Satu LED merah menunjukkan status baterai
- Struktur lipat pegangan yang baru dirancang: Mekanisme pengunci ditambahkan sehingga pegangan yang terlipat tidak dapat dibuka, pegangan dapat dikunci hanya dengan melipat pegangan ke bawah dan dilepaskan hanya dengan menekan dua tuas; Pegangan dapat disesuaikan ketinggiannya

**LXT XPT**

Blade, Hex wrench, Rod, Battery, Charger

Hole Diameter	25,4 mm
Cutting Width	230 mm (9")
Cutting Height	10 - 55 mm
No Load Speed	7.000 RPM
Dimensions (L x W x H)	860 - 1.105 x 256 x 680 - 920 mm
	When Stored (w/o Grass Box):
	264 x 363 x 780 mm
Net weight	8,6 - 8,9 kg

**DUS158 / DUS108****18V LXT Li-Ion Cordless Garden Sprayer**

Cordless Garden Sprayer



- WetGuard; Performa tahan air yang luar biasa
- Tahan air tingkat IP54
- Model ransel memiliki selempang nyaman dengan tali bahu yang empuk
- Tuas di tangan untuk pengoperasian yang lebih mudah
- Pengukur bahan bakar baterai dengan tiga lampu LED

**LXT WG**

WETGUARD

Upright Double-Headed Nozzle, Wide-Angle Herbicide Nozzle, Shoulder Harness, Holder, Measure cup, Battery, Charger

Max Pressure	0,5 Mpa
Chemical tank	DUS158: 15 L
	DUS108: 10 L
Hose Length	1,7 m
Dimensions (L x W x H)	DUS158: 325 x 237 x 517 mm
	DUS108: 325 x 237 x 439 mm
Net weight	4,6 kg

**DUS054****18V LXT Li-Ion Cordless 5 L Garden Sprayer**

Cordless Garden Sprayer



- Dapat memakai satu atau dua nosel kepala
- Tersedia dua nosel kepala untuk semprotan lebih luas
- Tuas di tangan untuk pengoperasian yang lebih mudah
- Bentuk tangki dioptimalkan agar mudah dipasang
- WetGuard; Performa tahan air yang luar biasa

**LXT XPT**

H-Shaped Double Head Nozzle, Spray Wand, Spray Wand Holder, Shoulder Belt, Battery, Charger

Max Pressure	0,3 Mpa (3 kgf/cm <sup>2</sup> )
Chemical tank	5 L
Hose Length	1,7 m
Spray Wand Length	0,5 - 0,7 m
Nozzle Mounting Thread	G 1/4
Dimensions (L x W x H)	343 x 182 x 368 mm
Net weight	3,2 - 3,5 kg



# 12V<sub>max</sub> LITHIUM-ION

4.0Ah 2.0Ah 1.5Ah

EXPAND YOUR LITHIUM-ION LINEUP

- Driver Drill
- Hammer Driver Drill
- Impact Driver
- Rotary Hammer
- Circular Saw
- Cutter
- Drywall Saw
- Jig Saw
- Sander Polisher
- Adapter for USB
- Caulking Gun
- Garden Sprayer
- Hedge Trimmer
- Inflator
- Blower
- Grass Trimmer
- Grass Shear
- Stapler
- Pin Nailer
- Multi tool
- Recipro Saw
- Threaded Rod Cutter
- Multi Cutter
- Angle Impact Driver
- Ratchet Wrench
- Impact Wrench
- Impact Driver
- Angle Drill
- Job Site Radio
- Job Site Speaker
- Rechargeable Green 4-point Cross Line Laser
- Rechargeable Red 4-point Cross Line Laser
- Rechargeable Green Multi Line Laser
- Multi Line Laser
- Heated Jacket
- Heated Vest
- Heated Blanket
- Fan
- LED Flashlight
- Fan Jacket
- Fan Vest
- Cordless Cleaner



## DF333D

## Cordless Driver Drill

12Vmax CXT Li-Ion Cordless 10 mm (3/8")  
28 N-m (250 in.lbs.) Driver Drill



Capacity	Steel: 10 mm (3/8")
	Wood (Self-Feed Bit): 42 mm (1-5/8") Wood: 21 mm (13/16")
Chuck Capacity	0,8 - 10 mm (1/32 - 3/8")
No Load Speed	High / Low: 0 - 1.700 / 0 - 450 RPM
Max Fastening Torque	Hard / Soft: 30 / 14 N-m (270 / 130 in.lbs.)
Max Lock Torque	28 N-m (250 in.lbs.)
Dimensions (L x W x H)	w/ BL1016/BL1021B: 179 x 66 x 212 mm
Net weight	1,1 - 1,2 kg

CXT



Phillips Bit, Belt Clip, Battery, Charger



## DF332D

## Cordless Driver Drill

12Vmax CXT BL Brushless Cordless 10 mm (3/8")  
32 N-m (280 in.lbs.) Driver Drill



Capacity	Steel: 10 mm (3/8")
	Wood (Self-Feed Bit): 56 mm (2-3/16") Wood: 28 mm (1-1/8")
Chuck Capacity	0,8 - 10 mm (1/32 - 3/8")
No Load Speed	High / Low: 0 - 1.500 / 0 - 450 RPM
Max Fastening Torque	Hard / Soft: 35 / 21 N-m (310 / 190 in.lbs.)
Max Lock Torque	32 N-m (280 in.lbs.)
Dimensions (L x W x H)	154 x 66 x 217 mm
Net weight	1 - 1,2 kg

CXT BL MOTOR XPT



Phillips Bit, Belt Clip, Battery, Charger



## HP333D

## Cordless Hammer Driver Drill

12Vmax CXT Li-Ion Cordless 10 mm (3/8")  
28 N-m (250 in.lbs.) Hammer Driver Drill



Capacity	Steel / Wood / Masonry: 10 / 21 / 8 mm (3/8 / 13/16 / 5/16")
	Wood (Self-Feed Bit): 42 mm (1-5/8")
Chuck Capacity	0,8 - 10 mm (1/32 - 3/8")
Impacts Per Minute	High / Low: 0 - 25.500 / 0 - 6.750 IPM
No Load Speed	High / Low: 0 - 1.700 / 0 - 450 RPM
Max Fastening Torque	Hard / Soft: 30 / 14 N-m (270 / 130 in.lbs.)
Max Lock Torque	28 N-m (250 in.lbs.)
Dimensions (L x W x H)	w/ BL1016/BL1021B: 193 x 66 x 212 mm
Net weight	1,1 - 1,3 kg

CXT



Phillips Bit, Belt Clip, Battery, Charger



## HP332D

## Cordless Hammer Driver Drill

12V max CXT BL Brushless Cordless 10 mm (3/8")  
32 N-m (280 in.lbs.) Hammer Driver Drill



Capacity	Steel / Wood / Masonry: 10 / 28 / 8 mm (3/8 / 1-1/8 / 5/16")
	Wood (Self-Feed Bit): 56 mm (2-3/16")
Chuck Capacity	0,8 - 10 mm (1/32 - 3/8")
Impacts Per Minute	High / Low: 0 - 25.500 / 0 - 6.750 IPM
No Load Speed	High / Low: 0 - 1.500 / 0 - 450 RPM
Max Fastening Torque	Hard / Soft: 35 / 21 N-m (310 / 190 in.lbs.)
Max Lock Torque	32 N-m (280 in.lbs.)
Dimensions (L x W x H)	168 x 66 x 217 mm
Net weight	1,1 - 1,3 kg

CXT BL MOTOR XPT



Phillips Bit, Belt Clip, Battery, Charger



## DA333D

## Cordless Angle Drill

12V max CXT Li-Ion Cordless 10 mm (3/8") Angle Drill,  
Keyless Chuck



Capacity	Steel: 10 mm (3/8")
	Wood: 12 mm (1/2") Wood (Self-Feed Bit): 24 mm (15/16")
Chuck Capacity	0,8 - 10 mm (1/32 - 3/8")
No Load Speed	0 - 1.100 RPM
Head Height	84 mm (3-5/16")
Center Height	23,5 mm (15/16")
Dimensions (L x W x H)	w/ BL1016/BL1021B: 313 x 68 x 95 mm
Net weight	1,2 - 1,4 kg

CXT



Bit, Belt Clip, Battery, Charger



## TD111D

## Cordless Impact Driver

12V max CXT BL Brushless Cordless A-Mode (Assist Mode)  
135 N-m (1.200 in.lbs.) Impact Driver



Capacity	Machine Screw: M4 - M8 mm (5/32 - 5/16")
	Standard Bolt: M5 - M14 (3/16 - 9/16") High Strength Bolt: M5 - M12 (3/16 - 1/2") Coarse thread (in length): 22 - 90 mm (7/8 - 3-1/2")
Hex Shank	6,35 mm (1/4")
No Load Speed	0 - 3.000 / 0 - 1.300 RPM
Impacts Per Minute	0 - 3.900 / 0 - 1.600 IPM
Max Fastening Torque	135 N-m (1.200 in.lbs.)
Dimensions (L x W x H)	135 x 66 x 210 mm
Net weight	0,97 - 1,1 kg

CXT BL MOTOR XPT



Phillips Bit, Belt Clip, Battery, Charger



**TW160D** Cordless Impact Wrench

12Vmax CXT BL Brushless Cordless 3/8" (9.5 mm)  
160 N-m (120 ft.lbs.) Impact Wrench



Fastening Capacities	Standard Bolt: M8 - M16 (5/16 - 5/8") High Strength Bolt: M6 - M12 (1/4 - 1/2")
Impacts Per Minute	Hard / Soft: 0 - 3.600 / 2.000 IPM
No Load Speed	Hard / Soft: 0 - 2.400 / 1.300 RPM
Square Drive	9,5 mm (3/8")
Max Fastening Torque	160 N-m (120 ft.lbs.)
Dimensions (L x W x H)	w/ BL1016/BL1021B: 144 x 66 x 213 mm
Net weight	1,0 - 1,2 kg



Belt Clip, Battery, Charger

**TW161D** Cordless Impact Wrench

12Vmax CXT BL Brushless Cordless 1/2" (12.7 mm)  
165 N-m (122 ft.lbs.) Impact Wrench



Fastening Capacities	Standard Bolt: M8 - M16 (5/16 - 5/8") High Strength Bolt: M6 - M12 (1/4 - 1/2")
Impacts Per Minute	Hard / Soft: 0 - 3.600 / 2.000 IPM
No Load Speed	Hard / Soft: 0 - 2.400 / 1.300 RPM
Square Drive	12,7 mm (1/2")
Max Fastening Torque	165 N-m (122 ft.lbs.)
Dimensions (L x W x H)	w/ BL1016/BL1021B: 150 x 66 x 213 mm
Net weight	1,1 - 1,2 kg



Belt Clip, Battery, Charger

**TW140D** Cordless Impact Wrench

12Vmax CXT Li-Ion Cordless 1/2" (12.7 mm)  
145 N-m (107 ft.lbs.) Impact Wrench



Fastening Capacities	Standard Bolt: M8 - M16 (5/16 - 5/8") High Strength Bolt: M6 - M12 (1/4 - 1/2")
Square Drive	9,5 mm (3/8")
Impacts Per Minute	0 - 3.200 IPM
No Load Speed	0 - 2.600 RPM
Max Fastening Torque	140 N-m (100 ft.lbs.)
Dimensions (L x W x H)	w/ BL1016/BL1021B: 161 x 66 x 205 mm
Net weight	1 - 1,2 kg



Belt Clip, Battery, Charger

**TW141D** Cordless Impact Wrench

12Vmax CXT Li-Ion Cordless 1/2" (12.7 mm)  
145 N-m (107 ft.lbs.) Impact Wrench



Fastening Capacities	Standard Bolt: M8 - M16 (5/16 - 5/8") High Strength Bolt: M6 - M12 (1/4 - 1/2")
Square Drive	12,7 mm (1/2")
Impacts Per Minute	0 - 3.200 IPM
No Load Speed	0 - 2.600 RPM
Max Fastening Torque	145 N-m (107 ft.lbs.)
Dimensions (L x W x H)	w/ BL1016/BL1021B: 168 x 66 x 205 mm
Net weight	1,1 - 1,2 kg



Belt Clip, Battery, Charger

**HR166D** Cordless Rotary Hammer

12V max CXT BL Brushless Cordless 16 mm (5/8")  
Rotary Hammer, SDS-PLUS Bits



Impact Energy Capacity	EPTA-Procedure 05/2009: 1,1 J Concrete: 16 mm (5/8") Steel: 10 mm (3/8") Wood: 13 mm (1/2") Masonry: 16 mm (5/8")
Chuck Capacity	1,5 - 13 mm (1/16 - 1/2")
Blows Per Minute	0 - 4.800 BPM
No Load Speed	0 - 680 RPM
Dimensions (L x W x H)	w/ BL1016/BL1021B: 250 x 74 x 187 mm
Net weight	1,8 - 2,4 kg



Dust Cup (country-specific), Side Grip, Depth Gauge, Battery, Charger

**HR140D** Cordless Rotary Hammer

12V max CXT Li-Ion Cordless 14 mm (9/16") Rotary Hammer,  
SDS-PLUS Bits



Impact Energy Capacity	EPTA-Procedure 05/2009: 1,0 J Concrete: 14 mm (9/16") Steel: 10 mm (3/8") Wood: 13 mm (1/2") Masonry: 14 mm (9/16")
Chuck Capacity	1,5 - 13 mm (1/16 - 1/2")
Blows Per Minute	0 - 4.900 BPM
No Load Speed	0 - 850 RPM
Dimensions (L x W x H)	w/ BL1016/BL1021B: 246 x 74 x 179 mm
Net weight	1,9 - 2,6 kg



Side Grip, Depth Gauge, Dust Cup (country-specific), Battery, Charger

**DF012D** Cordless Driver Drill

7.2V Li-Ion Cordless Two-Position 5 mm (3/16")  
8 N-m (71 in.lbs.) Driver Drill



Capacity	Steel: 5 mm (3/16") Wood (Self-Feed Bit): 12 mm (15/32") Wood: 6 mm (1/4")
Chuck Capacity	6,35 mm (1/4")
No Load Speed	High / Low: 650 / 200 RPM
Max Fastening Torque	Hard / Soft: 5,6 / 3,6 N-m (50 / 32 in.lbs.)
Max Lock Torque	8,0 N-m (71 in.lbs.)
Dimensions (L x W x H)	Pistol Style: 218 x 44 x 142 mm
Dimensions (L x W)	Straight Style: 273 x 44 mm
Net weight	0,53 kg



Phillips Bit, Battery, Charger



## TD022D

## Cordless Impact Driver

7.2V Li-Ion Cordless Two-Position 25 N-m (220 in.lbs.) Impact Driver



Capacity	Machine Screw: M3 - M8 (1/8 - 5/16") Standard Bolt: M3 - M8 (1/8 - 5/16") High Strength Bolt: M3 - M6 (1/8 - 1/4") Coarse thread (in length): 22 - 45 mm (7/8 - 1-3/4")
Hex Shank	6,35 mm (1/4")
No Load Speed	0 - 2.450 RPM
Impacts Per Minute	0 - 3.000 IPM
Max Fastening Torque	25 N-m (220 in.lbs.)
Dimensions (L x W x H)	Straight Style: 282 x 42 x 52 mm Pistol Style: 227 x 42 x 142 mm
Net weight	0,55 - 0,56 kg



Holster, Bit set, Battery, Charger

## WR100D

## Cordless Ratchet Wrench

12Vmax CXT Li-Ion Cordless 47.5 N-m (420 in.lbs.) Ratchet Wrench



Capacity	Standard Bolt: M5 - M12 (3/16 - 1/2") High Strength Bolt: M5 - M10 (3/16 - 3/8")
Square Drive	9,5 / 6,35 mm (3/8 / 1/4")
No Load Speed	0 - 800 RPM
Max Fastening Torque	47,5 N-m (420 in.lbs.)
Flats Width	13 mm (1/2")
Angle Head Size	Diameter: 31 mm (1-7/32") Height: 25,5 mm (1")
Dimensions (L x W x H)	w/ BL1016/BL1021B: 341 x 67 x 63 mm
Net weight	1,0 - 1,2 kg

**CXT XPT**



Socket Adapter, Battery, Charger, Tool Bag

## CC301D

## Cordless Cutter

12V max CXT Li-Ion Cordless 85 mm (3-3/8") Cutter, Wet Type



Blade Diameter	85 mm (3-3/8")
Hole Diameter	15 mm (9/16")
Max Cutting Capacity	0°: 25,5 mm (1") 45°: 16,5 mm (5/8")
No Load Speed	1.600 RPM
Tank Capacity	Water: 0,5 L
Dimensions (L x W x H)	313 x 170 x 125 mm
Net weight	1,9 kg

**CXT**



Diamond Wheel, Water Supply Tank Assembly, Hex Wrench, Battery, Charger

## CP100D

## Cordless Multi Cutter

12V max CXT Li-Ion Cordless Multi Cutter



Max Cutting Capacity	6 mm (1/4")
No Load Speed	300 RPM
Dimensions (L x W x H)	w/ BL1016/BL1021B: 272 x 66 x 120 mm
Net weight	0,72 - 0,88 kg

**CXT**



Blade, Battery, Charger

## PV301D

## Cordless Sander Polisher

12Vmax CXT BL Cordless Sander Polisher



Pad / Disc Diameter	Twist-On / Twist-Off Style: 50 mm (2") Hook & Loop Style: 80 mm (3-1/8")
Backing Pad Diameter	Twist-On / Twist-Off Style: 46 mm (1-13/16") Hook & Loop Style: 75 mm (2-15/16")
No Load Speed	Polishing: 0 - 2.800 RPM Sanding: 0 - 9.500 RPM
Continuous Use	w/ BL1041B: 18 min
Head Length	127 mm (5")
Dimensions (L x W x H)	w/ BL1016/BL1021B: 137 x 67 x 231 mm
Net weight	1,1 - 1,2 kg

**CXT BL MOTOR XPT**



de Grip, Pad, Adapter, Wool Pad, Sponge Pad, Battery, Charger

## HS301D

## Cordless Circular Saw

12V max CXT Li-Ion Cordless 85 mm (3-3/8") Circular Saw



Blade Diameter	85 mm (3-3/8")
Max Cutting Capacity	0°: 25,5 mm (1") 45°: 16,5 / 16,5 mm (5/8 / 5/8")
No Load Speed	1.500 RPM
Dimensions (L x W x H)	313 x 170 x 155 mm
Net weight	1,6 - 1,7 kg

**CXT**



Dust Nozzle (country-specific), TCT Saw Blade, Hex Wrench, Battery, Charger

## JV101D

## Cordless Jig Saw

12V max CXT Li-Ion Cordless Top Handle Jig Saw



Max Cutting Capacity at 0°	Wood / Aluminum / Mild Steel: 65 / 4 / 2 mm (2-9/16 / 5/32 / 1/16")
Length of Stroke	18 mm (11/16")
Strokes Per Minute	0 - 2.900 SPM
Dimensions (L x W x H)	232 x 76 x 196 mm
Net weight	1,8 - 1,9 kg

**CXT**



Jig Saw Blade, Hex Wrench, Guide Rule (country-specific), Battery, Charger

JR103D

Cordless Recipro Saw

12V max CXT Li-Ion Cordless Recipro Saw



Length of Stroke	13 mm (1/2")
Strokes Per Minute	0 - 3.300 SPM
Capacity	Pipe / Wood: 50 / 50 mm (2 / 2")
Dimensions (L x W x H)	376 x 66 x 186 mm
Net weight	1,3 - 1,5 kg



Battery, Charger, Recipro Saw Blades, Hex Wrench

CG100D

Cordless Caulking Gun

12V max CXT Li-Ion Cordless Caulking Gun



Max Dispensing Force	5.000 N (1.100 lbs)
No Load Speed	0 - 28 mm/sec. (0 - 66 in/min.)
Holder Size	300, 600, 800 mL
Dimensions (L x W x H)	404 x 108 x 259 mm
Net weight	1,9 - 2,6 kg



Holder, Holder Joint, Piston, Rubber Ring, Nozzle, Battery, Charger



UB100D

Cordless Blower

12Vmax CXT Cordless Variable 3-Speed Blower



Max Air Volume	2,6 m³/min
Max Air Velocity	75 m/s
Blowing Force	1,8 N
Max Sealed Suction	4,0 kPa
No Load Speed	0 - 15.800 RPM
Run Time	w/ BL1016, High / Mid / Low: 8 / 20 / 45 min
Dimensions (L x W x H)	w/ BL1016/BL1021B: 505 x 155 x 184 mm
Net weight	1,4 - 1,9 kg



Nozzle, Dust Bag (country-specific), Flexible Hose (country-specific), Battery, Charger

UN460WD

Cordless Hedge Trimmer

12Vmax LXT Cordless 46 cm (18-1/8") Pole Hedge Trimmer



Blade Length	460 mm (18-1/8")
Effective Cutting Length	470 mm 18-1/2"
Max Cutting Capacity	18 mm (11/16")
Strokes Per Minute	3.600 SPM
Continuous Use	w/ BL1041B: 53 min
Dimensions (L x W x H)	1.889 - 2.511 x 87 x 134 mm
Net weight	2,8 - 3,0 kg



Blade Cover, Chip Receiver (country-specific), Shear Blade (country-specific), Battery, Charger

UR100D

Cordless Grass Trimmer

12V max CXT Li-Ion Cordless Grass Trimmer



Cutting Width	Nylon Cutting Head: 260 mm (10") Plastic Blade: 230 mm (9")
No Load Speed	10.000 RPM
Spindle Size	M8 x 1.25 LH
Dimensions (L x W x H)	835 - 1.185 x 267 x 210 - 315 mm
Net weight	1,9 - 2,1 kg



Safety Goggles, Shoulder Belt, Nylon Cutting Head, Nylon Cord, Plastic Blade, Accessory Bag, Hex Wrench, Battery, Charger



US053D

Cordless Garden Sprayer

12Vmax CXT Li-Ion Cordless 5 L Garden Sprayer



Max Pressure	0,3 MPa (3 kgf/cm²)
Chemical tank	5 L
Hose Length	1,7 m
Spray Wand Length	0,5 - 0,7 m
Nozzle Mounting Thread	G 1/4
Dimensions (L x W x H)	343 x 182 x 343 mm
Net weight	2,9 - 3,0 kg



H-Shaped Double Head Nozzle, Spray Wand, Spray Wand Holder, Shoulder Belt, Battery, Charger

**SK10GD**

Rechargeable Green Multi Line Laser

**12V max CXT Li-Ion Rechargeable Green Multi Line Laser**

Leveling accuracy	1 mm / 10 m
Self-leveling range	4
Laser type	Laser class 2: 515 nm
Operating Temperature	-10 - 40°C
Protection class	IP54
Net weight	1,4 - 1,6 kg

Dimensions (with carry handle in retracted position)

**CXI XPT**

Laser detector, Laser Receiver Vise, Laser Viewing Glass, Shoulder Strap, Storage Case, Battery, Charger

**SK20GD**

Rechargeable Green Multi Line Laser

**12V max CXT Li-Ion Rechargeable Green Multi Line Laser**

Leveling accuracy	1 mm / 10 m
Self-leveling range	4
Laser type	Laser class 2: 515 nm
Operating Temperature	-10 - 40°C
Protection class	IP54
Net weight	1,4 - 1,6 kg

Dimensions (with carry handle in retracted position)

**CXI XPT**

Laser detector, Laser Receiver Vise, Laser Viewing Glass, Shoulder Strap, Storage Case, Battery, Charger

**SK40GD**

Rechargeable Green Multi Line Laser

**12V max CXT Li-Ion Rechargeable Green Multi Line Laser**

Leveling accuracy	1 mm / 10 m
Self-leveling range	4
Laser type	Laser class 2: 515 nm
Operating Temperature	-10 - 40°C
Protection class	IP54
Net weight	1,4 - 1,6 kg

Dimensions (with carry handle in retracted position)

**CXI XPT**

Laser detector, Laser Receiver Vise, Laser Viewing Glass, Shoulder Strap, Storage Case, Battery, Charger

**SK700GD / SK700D**

Rechargeable Multi Line Laser

**12V max CXT Li-Ion Rechargeable Multi Line Laser**

Leveling accuracy	2 mm / 10 m
Self-leveling range	4
Laser type	SK700GD: Laser class 2: 510 - 530 nm SK700D: Laser class 2: 630 - 645 nm
Operating Temperature	-10 - 50°C
Protection class	IP54
Dimensions (L x W x H)	w/ BL1016/BL1021B: 149 x 104 x 153 mm
Net weight	0,99 - 1,2 kg

**CXI XPT**

Target Plate, Adapter, Soft Bag

**LD050P**

Laser Distance Measure

**50 m Laser Distance Measure**

Measuring range	0,05 - 50 m
Power supply	Cell battery: AAA 1.5V x 2 pcs
Net weight	0,1 kg



AAA Alkaline Dry Battery 1.5V x2, Carrying strap, Target Plate

**LD080PI**

Laser Distance Measure

**80 m Laser Distance Measure, Inclination Sensor**

Measuring range	0,05 - 80 m
Power supply	Cell battery: AAA 1.5V x 2 pcs
Net weight	0,14 kg



AAA Alkaline Dry Battery 1.5V x2, Carrying strap, Target Plate

**MP100D**

Cordless Inflator

**12Vmax CXT Li-Ion Cordless Inflator**

Rated Operating Time	5 min On / 5 min Off
Max Air Pressure	830 kPa (121 PSI) [8.3 bar]
Air Discharge Amount	200 kPa: 10 L/min
Dimensions (L x W x H)	w/ BL1041B: 255 x 74 x 173 mm
Net weight	1,2 - 1,3 kg

**CXI**

British Adapter, French Adapter, Ball Adapter, Swim Ring Adapter, Battery, Charger



Item perlengkapan dan spesifikasi standar dapat berbeda di setiap negara atau wilayah. Berat bersih dan ukuran dapat berbeda menurut jenis baterai.

# Cleaners



# **AWS**

Auto - start Wireless System

Nyalakan alat



Penyedot debu  
diaktifkan

 **Bluetooth**<sup>®</sup>

**AWS terhubung ke alat listrik dengan Bluetooth**

Merek kata dan logo Bluetooth<sup>®</sup> adalah merek dagang terdaftar yang dimiliki oleh Bluetooth SIG, Inc. dan setiap penggunaan merek tersebut oleh Makita berada di bawah lisensi. Merek dagang dan nama dagang lainnya adalah milik pemiliknya masing-masing.

# Cordless Vacuum Cleaner & Backpack Vacuum Cleaner

## VC001GL

### 40Vmax XGT BL Cordless 8L Vacuum Cleaner (Wet & Dry)

#### Cordless Vacuum Cleaner



**new**

- Performa Vakum yang luar biasa setara dengan model Corded yang dicapai dengan meningkatkan efisiensi pendinginan terhadap panas yang dihasilkan dari komponen listrik karena peningkatan daya output
- Tahan air berperingkat IPX4
- Kompatibel dengan adaptor MAK PAC saat ini; Baterai dapat dilepas/dipasang meskipun adaptor terpasang
- Untuk pembersihan vakum basah dan kering
- Jenis filter: Filter kain



**XGT BL MOTOR XPT**



Floor Nozzle, Straight Pipe, Bent Pipe, Hose, Plastic Dust Bag, Plastic Dust Bag x10, Stopper, Telescopic pipe assembly, Long Sash Nozzle, Battery, Charger

Capacity	Dust / Water: 8 / 6 L
Continuous Use	BL4050F x2: 220 min
Max Air Flow	3,2 m <sup>3</sup> /min
Max Sealed Suction	23 kPa
Suction Power	310 W
Dimensions (L x W x H)	366 x 334 x 425 mm
Net weight	8,1 - 10,0 kg

## VC005GL

### 40Vmax XGT BL Cordless 8L HEPA Vacuum Cleaner (Dry Only)

#### Cordless Vacuum Cleaner



**new**

- Performa Vakum yang luar biasa setara dengan model Corded yang dicapai dengan meningkatkan efisiensi pendinginan terhadap panas yang dihasilkan dari komponen listrik karena peningkatan daya output
- Tahan air berperingkat IPX4
- Kompatibel dengan adaptor MAK PAC saat ini; Baterai dapat dilepas/dipasang meskipun adaptor terpasang
- Dikembangkan sebagai penyedot debu untuk industri pemeliharaan gedung
- Jenis filter: Sangkar filter + filter kain



**XGT BL MOTOR XPT**



Floor Nozzle, Straight Pipe, Bent Pipe, Hose, Paper Dust Bag, Telescopic pipe assembly, Stopper, Battery, Charger, Long Sash Nozzle, Plastic Dust Bag, Plastic Dust Bag x10

Capacity	Dust: 8 L
Continuous Use	BL4050F x2: 220 min
Max Air Flow	2,8 m <sup>3</sup> /min
Max Sealed Suction	23 kPa
Suction Power	265 W
Dimensions (L x W x H)	366 x 334 x 397 mm
Net weight	7,6 - 9,5 kg

## VC008G

### 40Vmax XGT BL Brushless Cordless HEPA Backpack Vacuum Cleaner

#### Cordless Backpack Vacuum Cleaner



**new**

- Performa penghilangan debu yang tinggi
- Mode kebisingan rendah memungkinkan untuk digunakan di lingkungan yang peka terhadap kebisingan seperti kantor, rumah sakit, dan lainnya



**XGT BL MOTOR**



Floor Nozzle, Hose, Hose Band, Nozzle, Telescopic pipe assembly, Bent Pipe, Switching nozzle, Free Nozzle, Dust Bag, Front Cuff (country-specific), Battery, Charger

Capacity	Cloth Dust Bag: 1.5 L
Max Air Flow	2,4 m <sup>3</sup> /min
Max Sealed Suction	18 kPa
Suction Power	w/ Hose 32-1.0 (Max): 180 W
Dimensions (L x W x H)	233 x 151 x 376 mm
Net weight	4,3 - 4,7 kg

## DVC660

### 18V X2 (36V) LXT BL Brushless Cordless HEPA Backpack Vacuum Cleaner

#### Cordless Backpack Vacuum Cleaner



- Mekanisme pembersihan untuk kantong debu kertas
- Peningkatan daya hisap untuk meningkatkan pengumpulan debu
- Motor BL memungkinkan aliran udara maksimal 2,2 m<sup>3</sup>/menit atau tekanan vakum maksimal 11 kPa serta waktu kerja lebih lama
- Fungsi memori mode memungkinkan untuk memulai dengan daya hisap yang sama dengan penggunaan terakhir sebelumnya
- Memberikan waktu pengoperasian hingga 140 menit menggunakan BL1860B pada pengaturan normal



**LXT BL MOTOR**



Floor Nozzle, Hose, Hose Band, Nozzle assembly, Telescopic pipe assembly, Bent Pipe, Switching nozzle, Free Nozzle, Dust Bag, Front Cuffs (22, 24), Battery, Charger

Capacity	Cloth Dust Bag: 5.5 L
Continuous Use	w/ BL1860B, Max / High / Normal: 75 / 40 / 140 min
Max Air Flow	w/ Hose Complete 28-1.0: 2 m <sup>3</sup> /min w/ Hose Complete 28-1.5: 1,8 m <sup>3</sup> /min
Max Sealed Suction	11 kPa
Suction Power	Max / High / Normal w/ Hose 28-1.0: 95 / 45 / 25 W Max / High / Normal w/ Hose 28-1.5: 85 / 45 / 25 W
Dimensions (L x W x H)	297 x 174 x 523 mm
Net weight	6,1 - 6,7 kg

## DVC261

### 18V X2 (36V) LXT BL Brushless Cordless HEPA Backpack Vacuum Cleaner

#### Cordless Backpack Vacuum Cleaner



- Peningkatan daya hisap untuk meningkatkan pengumpulan debu saat terhubung dengan Makita Power Tools
- Motor BL memungkinkan aliran udara maksimal 2,3 m<sup>3</sup>/menit atau tekanan vakum maksimal 11 kPa serta waktu kerja lebih lama
- Fungsi memori mode memungkinkan untuk memulai dengan daya hisap yang sama dengan penggunaan terakhir sebelumnya
- Memberikan waktu pengoperasian hingga 140 menit menggunakan BL1860B pada pengaturan normal



**LXT BL MOTOR**



Floor Nozzle, Hose, Hose Band, Nozzle assembly, Telescopic pipe assembly, Bent Pipe, Switching nozzle, Free Nozzle, Dust Bag, Front Cuffs (22, 24), Battery, Charger

Capacity	Paper Dust Bag / Cloth Dust Bag: 2 / 1.5 L
Continuous Use	w/ BL1860B, Max / High / Normal: 40 / 75 / 140 min
Max Air Flow	w/ Hose complete 32-1.0: 2.2 m <sup>3</sup> /min w/ Hose Complete 28-1.0: 2.0 m <sup>3</sup> /min w/ Hose Complete 28-1.5: 1.8 m <sup>3</sup> /min
Max Sealed Suction	11 kPa
Suction Power	High / Normal w/ Hose 28-1.0: 90 / 45 / 25 W High / Normal w/ Hose 28-1.5: 85 / 45 / 25 W
Dimensions (L x W x H)	230 x 152 x 373 mm
Net weight	3,8 - 4,5 kg

## Cordless Cleaner

CL001G / CL002G / CL003G

# Daya tinggi dengan kebisingan rendah



### CL001G

#### 40Vmax XGT BL Brushless Cordless Cleaner

Cordless Cleaner



- Peningkatan daya hisap 125 W dicapai dengan menggunakan baterai 40Vmax XGT
- Pembersihan yang tenang dicapai dengan mendesain ulang struktur aliran udara
- 4 mode dengan fungsi memori
- Nozzle yang didesain ulang untuk pengoperasian yang nyaman
- Lampu LED bawaan menerangi area kerja
- Dua sakelar tombol tekan satu sentuhan (satu untuk ON/4-perubahan kecepatan, yang lain untuk OFF)



Floor Nozzle, Sash Nozzle, Sash Nozzle Holder, Pipe, Filter H, Easy Shake Off Filter, Battery, Charger

Capacity	730 mL
Continuous Use	w/ BL4025, 1 / 2 / 3 / 4: 80 / 40 / 25 / 17 min
Dimensions (L x W x H)	505 x 113 x 152 mm
Net weight	1,7 - 2,3 kg

### CL002G

#### 40Vmax XGT BL Brushless Cordless Cleaner

Cordless Cleaner



new

- Peningkatan daya hisap 125 W dicapai dengan menggunakan baterai 40Vmax XGT
- Pembersihan yang tenang dicapai dengan mendesain ulang struktur aliran udara
- 4 mode dengan fungsi memori
- Nozzle yang didesain ulang untuk pengoperasian yang nyaman
- Lampu LED bawaan menerangi area kerja
- Dua sakelar tombol tekan satu sentuhan (satu untuk ON/4-perubahan kecepatan, yang lain untuk OFF)



Floor Nozzle, Sash Nozzle, Sash Nozzle Holder, Pipe, Easy Shake Off Dust Bag, Paper Dust Bag, Battery, Charger

Capacity	Dust Bag / Paper Pack: 500 / 330mL
Continuous Use	w/ BL4025, 1 / 2 / 3 / 4: 80 / 40 / 25 / 16 min
Dimensions (L x W x H)	505 x 113 x 177 mm
Net weight	1,8 - 3,0 kg

### CL003G

#### 40Vmax XGT BL Brushless Cordless Cleaner

Cordless Cleaner



new

- Peningkatan daya hisap 125 W dicapai dengan menggunakan baterai 40Vmax XGT
- Pembersihan yang tenang dicapai dengan mendesain ulang struktur aliran udara
- 4 mode dengan fungsi memori
- Nozzle yang didesain ulang untuk pengoperasian yang nyaman
- Lampu LED bawaan menerangi area kerja
- Dua sakelar tombol tekan satu sentuhan (satu untuk ON/4-perubahan kecepatan, yang lain untuk OFF)



Capacity	250mL
Continuous Use	w/ BL4025, 1 / 2 / 3 / 4: 80 / 40 / 25 / 16 min
Dimensions (L x W x H)	505 x 113 x 177 mm
Net weight	1,9 - 2,5 kg

18v + 18v → 36v

Li-Ion Ah 6.0 5.0 4.0 3.0 2.0 1.5

## Cordless Upright Cleaner

DVC560

### Ideal untuk membersihkan karpet




Aliran udara maks. Tekanan vakum maks.

1,9 m<sup>3</sup>/menit

12 kPa

18v + 18v → 36v

### Tingkat pengambilan debu yang tinggi



4 baris bulu berbentuk V meningkatkan tingkat pengambilan debu.

Daya hisap merata di seluruh lebar pembersihan karena bagian lubang hisap terletak di tengah.



menyedot debu

gulungan sikat berputar

### Dua motor BL yang berbeda

- Satu untuk menyedot debu dan yang lainnya untuk memutar sikat rol
- Dua motor dikontrol secara terpisah menurut mode hisap yang dipilih.

+

memungkinkan untuk digunakan di lingkungan yang peka terhadap kebisingan seperti kantor, rumah sakit, dan lainnya.

Mode kebisingan **57 dB(A)**

Mode maks.: 67dB (A) / Mode normal: 64dB (A)

### Waktu kerja lebih lama



Penggunaan terus menerus dengan daya baterai penuh\*

Maksimal sekitar	Tinggi sekitar	Bising Rendah sekitar
<b>25</b> menit	<b>55</b> menit	<b>115</b> menit

\*with BL1850B x2

### Pengaturan ketinggian brushroll 4 tingkat

Dapat diatur dalam 4 tingkat sesuai dengan ketinggian bulu karpet



### Bodi dapat dimiringkan hingga 90 derajat

memungkinkan untuk membersihkan di ruang sempit di bawah furnitur, sofa, tempat tidur dan masih banyak lagi.



DVC560

18V X2 (36V) LXT BL Brushless Cordless 5 L HEPA Upright Cleaner

Cordless Upright Cleaner



- Kinerja isap debu yang tinggi setara dengan corded upright cleaner
- Mode kebisingan rendah memungkinkan untuk digunakan di lingkungan yang peka terhadap kebisingan seperti kantor, rumah sakit, dan lainnya
- Menggunakan dua motor BL yang berbeda, satu untuk menyedot debu dan yang lainnya untuk memutar sikat rol
- Tombol satu sentuhan untuk memilih 3 mode isap dengan fungsi mode memori
- Pengaturan ketinggian sikat 4 tahap



LXT BL MOTOR

3-in-1

Long Sash Nozzle, Round Brush, Filter Bag, Filter H, Filter Bag Set

Capacity	Dust: 5 L
Continuous Use	w/ BL1860B x2, Max / Normal / Low Noise: 30 / 60 / 120 min
Max Air Flow	1,9 m <sup>3</sup> /min
Max Sealed Suction	12 kPa
Suction Power	Max / Normal / Low Noise: 85 / 50 / 25 W
Dust Pick-Up Rate	Max / Normal / Low Noise: 47 / 44 / 40
Cleaning Width	318 mm
Brushroll Rotation Speed	Max / Normal / Low Noise: 3.500 / 2.500 / 1.000 RPM
Dimensions (L x W x H)	326 x 318 x 1.146 mm
Net weight	8,3 - 9,0 kg

**DVC155L**

**18V X2 (36V) LXT BL Cordless 15 L Dust Class L Vacuum Cleaner (Wet & Dry)**

Cordless Vacuum Cleaner



- Lebih bertenaga
- Nosel lantai yang lebih tipis dan dapat diputar untuk meningkatkan kemampuan bermanuver
- Motor BL memungkinkan aliran udara maks 2,1 m<sup>3</sup>/menit atau tekanan vakum maksimal 11 kPa serta waktu kerja lebih lama
- Kapasitas kantong debu 15L yang besar memungkinkan pekerjaan pembersihan terus menerus
- Untuk pembersihan vakum basah dan kering



LXT BL MOTOR XPT



Floor Nozzle, Long Sash Nozzle, Telescopic pipe assembly, Bent Pipe, Pipe, Hose, Plastic Dust Bag x10, Filter, Tool Box, Battery, Charger

Capacity	Dust / Water: 15 / 12 L
Continuous Use	w/ BL1860B: 100 min
Max Air Flow	2,1 m <sup>3</sup> /min
Max Sealed Suction	11 kPa
Suction Power	105 W
Dimensions (L x W x H)	366 x 334 x 421 mm
Net weight	7,2 - 7,9 kg

**DVC156L**

**18V X2 (36V) LXT BL Cordless 15 L Dust Class L Vacuum Cleaner (Dry Only)**

Cordless Vacuum Cleaner



- Lebih bertenaga
- Nosel lantai yang lebih tipis dan dapat diputar untuk meningkatkan kemampuan bermanuver
- Motor BL memungkinkan aliran udara maks 2,1 m<sup>3</sup>/menit atau tekanan vakum maksimal 11 kPa serta waktu kerja lebih lama
- Kapasitas kantong debu 15L yang besar memungkinkan pekerjaan pembersihan terus menerus
- Untuk pembersihan vakum kering



LXT BL MOTOR XPT



Floor Nozzle, Long Sash Nozzle, Telescopic pipe assembly, Bent Pipe, Hose, Front Cuffs (22, 24, 38), Plastic Dust Bag x10, Filter, Tool Box, Battery, Charger

Capacity	Dust: 15 L
Continuous Use	w/ BL1860B: 100 min
Max Air Flow	2,1 m <sup>3</sup> /min
Max Sealed Suction	11 kPa
Suction Power	105 W
Dimensions (L x W x H)	366 x 334 x 421 mm
Net weight	7,3 - 7,9 kg

**DVC157L**

**18V X2 (36V) LXT BL AWS Cordless 15 L Dust Class L HEPA Vacuum Cleaner (Airborne Particles)**

Cordless Vacuum Cleaner



- Lebih bertenaga
- Nosel lantai yang lebih tipis dan dapat diputar untuk meningkatkan kemampuan bermanuver
- Auto-start Wireless System (AWS) terhubung ke alat listrik dengan Bluetooth
- Filter HEPA digunakan untuk menangkap partikel yang sangat halus secara efektif
- Kapasitas kantong debu 15L yang besar memungkinkan pekerjaan pembersihan terus menerus



LXT BL MOTOR AWS XPT



Floor Nozzle, Corner Nozzle, Straight Pipe, Bent Pipe, Hose (38mm-2.5m), Plastic Dust Bag, Plastic Dust Bag x10, Cloth Filter, Tool Box, Battery, Charger, Wireless Unit

Capacity	Dust: 15 L
Continuous Use	w/ BL1860B: 100 min
Max Air Flow	2,4 m <sup>3</sup> /min
Max Sealed Suction	11 kPa
Suction Power	110 W
Dimensions (L x W x H)	366 x 334 x 421 mm
Net weight	8,0 - 8,6 kg

**DVC865L**

**18V X2 (36V) LXT BL Cordless 8 L Dust Class L Vacuum Cleaner (Wet & Dry)**

Cordless Vacuum Cleaner



- Lebih bertenaga
- Nosel lantai yang lebih tipis dan dapat diputar untuk meningkatkan kemampuan bermanuver
- Motor BL memungkinkan aliran udara maks 2,1 m<sup>3</sup>/menit atau tekanan vakum maksimal 11 kPa serta waktu kerja lebih lama
- Kapasitas kantong debu 8L yang besar memungkinkan pekerjaan pembersihan terus menerus
- Untuk pembersihan vakum basah dan kering



LXT BL MOTOR XPT



Floor Nozzle, Long Sash Nozzle, Telescopic pipe assembly, Bent Pipe, Pipe, Hose, Plastic Dust Bag x10, Filter, Tool Box, Battery, Charger

Capacity	Dust / Water: 8 / 6 L
Continuous Use	w/ BL1860B: 100 min
Max Air Flow	2,1 m <sup>3</sup> /min
Max Sealed Suction	11 kPa
Suction Power	105 W
Dimensions (L x W x H)	366 x 334 x 368 mm
Net weight	7,0 - 7,7 kg

**DVC867L**

**18V X2 (36V) LXT BL AWS Cordless 8 L Dust Class L HEPA Vacuum Cleaner (Airborne Particles)**

Cordless Vacuum Cleaner



- Lebih bertenaga
- Nosel lantai yang lebih tipis dan dapat diputar untuk meningkatkan kemampuan bermanuver
- Auto-start Wireless System (AWS) terhubung ke alat listrik dengan Bluetooth
- Filter HEPA digunakan untuk menangkap partikel yang sangat halus secara efektif
- Kapasitas kantong debu 8 L yang besar memungkinkan pekerjaan pembersihan terus menerus



LXT BL MOTOR AWS XPT



Floor Nozzle, Corner Nozzle, Straight Pipe, Bent Pipe, Hose (38mm-2.5m), Plastic Dust Bag, Plastic Dust Bag x10, Cloth Filter, Tool Box, Battery, Charger, Wireless Unit

Capacity	Dust: 8 L
Continuous Use	w/ BL1860B: 100 min
Max Air Flow	2,4 m <sup>3</sup> /min
Max Sealed Suction	11 kPa
Suction Power	110 W
Dimensions (L x W x H)	366 x 334 x 368 mm
Net weight	7,7 - 8,4 kg

**DVC866L**
**18V X2 (36V) LXT BL Cordless 8 L Dust Class L Vacuum Cleaner (Dry Only)**
**Cordless Vacuum Cleaner**


- Lebih bertenaga
- Nosel lantai yang lebih tipis dan dapat diputar untuk meningkatkan kemampuan bermanuver
- Motor BL memungkinkan aliran udara maks 2,1 m<sup>3</sup>/menit atau tekanan vakum maksimal 11 kPa serta waktu kerja lebih lama
- Kapasitas kantong debu 8 L yang besar memungkinkan pekerjaan pembersihan terus menerus
- Untuk pembersihan vakum kering


**LXT BL XPT**


Floor Nozzle, Corner Nozzle, Straight Pipe, Bent Pipe, Hose (38mm-2.5m), Plastic Dust Bag, Plastic Dust Bag x10, Cloth Filter, Tool Box, Battery, Charger

Capacity	Dust: 8 L
Continuous Use	w/ BL1860B: 100 min
Max Air Flow	2,1 m <sup>3</sup> /min
Max Sealed Suction	11 kPa
Suction Power	105 W
Dimensions (L x W x H)	366 x 334 x 368 mm
Net weight	7,0 - 7,7 kg

**DVC860L**
**Cordless / 18V X2 (36V) LXT Li-Ion Cordless 8 L Dust Class L Vacuum Cleaner (Wet & Dry)**
**Cordless and Cordless Vacuum Cleaner**


- Didukung oleh dua baterai 18V LXT secara seri
- Penggunaan serbaguna berkat 2 sumber daya yang berbeda
- Pengukur bahan bakar baterai ganda
- Memberikan kemampuan bermanuver yang mudah
- Motor bertenaga 1.050W menghasilkan 3,6 m<sup>3</sup>/mnt
- Memberikan waktu pengoperasian hingga 65 menit menggunakan BL1850B
- Untuk pembersihan vakum basah dan kering


**LXT**


Floor Nozzle, Corner Nozzle, Straight Pipe, Bent Pipe, Hose (38mm-2.5m), Plastic Dust Bag, Plastic Dust Bag x10, Cloth Filter, Tool Box, Connection cord (country-specific), Battery, Charger

Capacity	Dust / Water: 8 / 6 L
Continuous Use	w/ BL1850B x2: 65 min
Max Air Flow	AC / DC: 3,6 / 2,1 m <sup>3</sup> /min
Max Sealed Suction	AC / DC: 24 / 9 kPa
Suction Power	AC / DC: 320 / 25 - 70 W
Dimensions (L x W x H)	366 x 334 x 368 mm
Net weight	8,6 - 9,2 kg

**Cordless Portable Vacuum Cleaner**
**DVC750L**
**Ringkas, portabel, dan mudah digunakan**

**DVC750L**
**18V LXT BL Brushless Cordless 7.5 L Dust Class L HEPA Portable 2-Speed Vacuum Cleaner (Wet & Dry)**
**Cordless Portable Vacuum Cleaner**


- Desain ringkas dan seimbang antara daya hisap dan waktu kerja
- Sistem filtrasi mampu membersihkan diri secara otomatis (opsional), dirancang untuk mempertahankan efisiensi hisap yang optimal dan masa pakai filter yang lebih lama
- Motor BL memungkinkan aliran udara maks 1,6 m<sup>3</sup>/menit
- HEPA Filter digunakan untuk menangkap partikel yang sangat halus secara efektif
- Telah memenuhi standar EU untuk Debu Kelas L


**LXT BL XPT**


Hose, Floor Nozzle, Sash Nozzle, Shoulder Belt, Round Brush, Shelf Brush, Joint, Battery, Charger

Capacity	Dust / Water: 7.5 / 4.5 L
Continuous Use	w/ BL1850B (High): 30 min w/ BL1850B (Normal): 60 min
Max Air Flow	High / Normal: 1,6 / 1,3 m <sup>3</sup> /min
Max Sealed Suction	High / Normal: 6,7 / 4,2 kPa
Suction Power	High / Normal: 50 / 25 W
Dimensions (L x W x H)	418 x 251 x 278 mm
Net weight	4,3 - 4,6 kg

DVC350

18V LXT Li-Ion Cordless Vacuum Cleaner

Cordless Vacuum Cleaner



- Desain ringkas dan ringan sehingga mudah dibawa
- Mudah digunakan bersama alat Makita yang lain
- Kapasitas kantong debu besar 3 L
- Tombol pengaturan volume udara Tinggi/Rendah untuk menyesuaikan dengan penggunaan Anda
- Dilengkapi tali selempang bahu sehingga semakin mudah dibawa-bawa



LXT



Charger, Battery, Nozzle, Dust Bag, Hose, Shoulder Belt

Max Air Flow	1,4 m <sup>3</sup> /min
Max Sealed Suction (water column)	6,0 kPa (612 mmH <sub>2</sub> O)
Recoverable capacity	Dust: 3,0 L (0,8 gal)
Dimensions (L x W x H)	273 x 195 x 226 mm
Net weight	2,2 - 2,4 kg

DCL501Z

18V LXT BL Brushless Cordless HEPA 2-Speed Cyclone Cleaner

Cordless Cyclone Cleaner



- Daya Hisap kuat yang tahan lama berkat motor BL
- Sistem filtrasi dengan pemisahan siklon
- Filter HEPA dengan kapasitas filtrasi tinggi yang efisien menangkap 99,97% partikel
- Tongkat teleskopik dapat diperpanjang untuk memungkinkan penyesuaian ketinggian pegangan agar sesuai dengan tinggi pengguna
- Dilengkapi dengan Star Protection Computer Controls™ untuk melindungi dari kelebihan beban, pemakaian berlebih, dan pemanasan berlebih



BL MOTOR



Shoulder Belt, Crevice Nozzle, Cleaning Brush, Floor Nozzle, Zoom Pipe, Hose, Hose Hook

Capacity	250 mL
Continuous Use	w/ BL1860B (High): 35 min w/ BL1860B (Low): 77 min
Max Air Flow	1,2 m <sup>3</sup> /min
Max Sealed Suction (water column)	10 kPa (1.020 mmH <sub>2</sub> O)
Suction Power	High / Low: 75 / 25 W
Dimensions (L x W x H)	352 x 189 x 252 mm
Net weight	3,1 - 3,4 kg

DCL280

18V LXT BL Brushless Li-Ion Cordless Cleaner

Cordless Cleaner



- Peningkatan Daya Hisap dicapai dengan menggunakan motor BL yang sangat efisien
- Motor BL dikontrol secara elektronik untuk mengoptimalkan penggunaan energi baterai untuk waktu pengoperasian yang lebih lama per pengisian daya
- Getaran rendah; menggunakan elastomer yang lebih lembut, getaran pada housing berkurang, meningkatkan kenyamanan bahkan dalam pembersihan yang terus menerus



LXT BL MOTOR



Floor Nozzle, Sash Nozzle, Sash Nozzle Holder, Pipe, Filter H, Easy Shake Off Filter, Battery, Charger

Capacity	750 mL
Continuous Use	BL1830B: 20 min
Max Air Flow	1,4 m <sup>3</sup> /min
Max Sealed Suction (water column)	6,4 kPa (640 mmH <sub>2</sub> O)
Dimensions (L x W x H)	1.016 x 113 x 155 mm
Net weight	3,1 - 3,4 kg

DCL281 / DCL282

18V LXT BL Brushless Li-Ion Cordless Cleaner

Cordless Cleaner



- Peningkatan Daya Hisap dicapai dengan menggunakan motor BL yang sangat efisien
- Motor BL dikontrol secara elektronik untuk mengoptimalkan penggunaan energi baterai untuk waktu pengoperasian yang lebih lama per pengisian daya
- Getaran rendah; menggunakan elastomer yang lebih lembut, getaran pada housing berkurang, meningkatkan kenyamanan bahkan dalam pembersihan yang terus menerus



LXT BL MOTOR



Floor Nozzle, Sash Nozzle, Sash Nozzle Holder, Pipe, Filter H, Easy Shake Off Filter, Easy Shake Off Dust Bag, Paper Dust Bag, Battery, Charger

Capacity	DCL281: 750 mL DCL282: 500 mL
Continuous Use	w/ BL1830B Max / High / Normal: 15 / 20 / 50 min
Max Air Flow	1,5 m <sup>3</sup> /min
Max Sealed Suction (water column)	8,2 kPa (820 mmH <sub>2</sub> O)
Dimensions (L x W x H)	DCL281: 1.016 x 113 x 154 mm DCL282: 1.016 x 114 x 154 mm
Net weight	DCL281: 1,2 - 1,6 kg DCL282: 1,3 - 1,6 kg

DCL182

18V LXT Li-Ion Cordless Cleaner

Cordless Cleaner



- Daya Hisap yang kuat untuk pembersihan cepat dengan waktu pengoperasian yang lebih lama
- Penggunaan terus menerus hingga 66 menit dari satu baterai BL1850B yang terisi penuh
- Tombol sakelar dengan pemilihan volume udara (Tinggi/Rendah) untuk mengurangi kelelahan dalam penggunaan terus-menerus
- Nosel lantai yang didesain ulang untuk meningkatkan kemampuan bermanuver dan pengumpulan serpihan



LXT BL MOTOR



Floor Nozzle, Sash Nozzle, Sash Nozzle Holder, Pipe, Dust Bag, Paper Dust Bag, Battery, Charger

Capacity	Dust Bag / Paper Pack: 500 / 330 mL
Continuous Use	w/ BL1850B High / Low: 33 / 66 min
Max Air Flow	1,0 m <sup>3</sup> /min
Max Sealed Suction (water column)	4,0 kPa (400 mmH <sub>2</sub> O)
Dimensions (L x W x H)	1.004 x 115 x 151 mm
Net weight	1,3 kg

18V

12V<sub>max</sub>

## Cordless Cleaner

DCL184 / CL121D

### Ideal untuk pembersihan interior



#### Selang fleksibel yang dapat disimpan

Selang yang tidak dilipat dapat mengenai kaki dan menyebabkan cedera.

Kait selang



Foto: DCL184

Pipa lurus

#### Baterai

DCL184

18V

LXT Li-Ion

3-Speed

3-Speed

3-Speed

3-Speed

3-Speed

3-Speed

3-Speed

3-Speed

3-Speed

3-Speed

3-Speed

3-Speed

3-Speed

3-Speed

3-Speed

3-Speed

3-Speed

3-Speed

3-Speed

3-Speed

3-Speed

3-Speed

3-Speed

3-Speed

3-Speed

3-Speed

3-Speed

3-Speed

3-Speed

3-Speed

3-Speed

3-Speed

3-Speed

3-Speed

3-Speed

#### Attachment Blower



#### DCL184

Cordless Cleaner

#### 18V LXT Li-Ion Cordless 3-Speed Cleaner



- Daya Hisap lebih tinggi dan waktu pengoperasian terus menerus yang lebih lama
- Desain rumah yang optimal untuk pembersihan interior mobil
- Dilengkapi dengan berbagai nozel khusus yang optimal untuk membersihkan interior mobil
- Dapat disambungkan dengan nozzle dari Cordless Cleaner Makita lainnya
- Dengan blower nozzle, dapat diubah menjadi blower sehingga menambah fungsi/keserbagunaan



LXT



Seat Nozzle, Mat Nozzle, Rubber Nozzle, Soft Brush, Blower Attachment, Dust Bag, Paper Dust Bag, Shoulder Belt, Battery, Charger

Capacity	Cloth Dust Bag / Paper Dust Bag: 500 / 330 mL
Continuous Use	w/ BL1830B Max / High / Normal: 20 / 30 / 80 min
Max Air Flow	Cleaning: 1,4 m <sup>3</sup> /min
Max Sealed Suction (water column)	5,4 kPa (550 mmH <sub>2</sub> O)
Suction Power	Max / High / Normal: 38 / 23 / 5 W
Max Air Flow	Blowing: 0,4 m <sup>3</sup> /min
Max Air Velocity	Blowing: 100 m/s
Dimensions (L x W x H)	w/ BL1830B / BL1840B / BL1850B / BL1860B: 365 x 138 x 202 mm
Net weight	1,8 - 2,2 kg

#### CL121D

Cordless Cleaner

#### 12Vmax CXT Li-Ion Cordless 3-Speed Cleaner



- Desain perumahan optimal untuk pembersihan interior mobil
- Dilengkapi dengan berbagai nozel khusus yang optimal untuk membersihkan interior mobil
- Dapat disambungkan dengan nozzle dari Cordless Cleaner Makita lainnya
- Dengan blower nozzle, dapat diubah menjadi blower sehingga menambah fungsi/keserbagunaan
- Pembersihan dapat dilakukan tanpa nozzle dengan menggunakan pipa lurus dan ujung miring sebagai nozzle



CXT



Seat Nozzle, Mat Nozzle, Rubber Nozzle, Soft Brush, Blower Attachment, Dust Bag, Paper Dust Bag, Shoulder Belt, Battery, Charger

Capacity	Cloth Dust Bag / Paper Dust Bag: 500 / 330 mL
Continuous Use	w/ BL1041B Max / High / Normal: 27 / 32 / 67 min
Max Air Flow	1,3 m <sup>3</sup> /min
Max Sealed Suction (water column)	4,6 kPa (470 mmH <sub>2</sub> O)
Suction Power	Max / High / Normal: 28 / 19 / 5 W
Max Air Flow	Blowing: 0,3 m <sup>3</sup> /min
Max Air Velocity	Blowing: 76 m/s
Dimensions (L x W x H)	w/ BL1016/BL1021B: 345 x 138 x 202 mm
Net weight	1,7 - 1,8 kg

**12V<sub>max</sub>****10.8V****CL107FD****12V max CXT Li-Ion Cordless Cleaner**

Cordless Cleaner



- Daya Hisap yang lebih kuat untuk pembersihan yang lebih cepat dengan waktu pengoperasian yang lebih lama
- Penggunaan terus menerus hingga 50 menit dari satu baterai BL1041B yang terisi penuh
- Lampu peringatan kapasitas baterai mulai berkedip ketika kapasitas baterai yang tersisa hampir habis
- Desain kebisingan rendah ideal untuk operasi pembersihan yang tenang di lokasi kerja di antara area perumahan



Floor Nozzle, Sash Nozzle, Sash Nozzle Holder, Pipe, Dust Bag, Paper Dust Bag, Battery, Charger

Capacity	Dust Bag / Paper Pack: 500 / 330 mL
Continuous Use	Max / High / Normal: 20 / 24 / 50 min
Max Air Flow	1,4 m <sup>3</sup> /min
Max Sealed Suction (water column)	6,4 kPa (640 mmH <sub>2</sub> O)
Suction Power	Max / High / Normal: 32 / 20 / 5 W
Dimensions (L x W x H)	960 x 112 x 150 mm
Net weight	1,1 - 1,3 kg

**CL114FD****12Vmax Li-Ion Cordless Cleaner Built-In Battery**

Cordless Cleaner



- Pembersih 3-Kecepatan dengan Lampu LED
- Daya Hisap 35 W yang jauh lebih tinggi berkat baterai 2,0 Ah
- Waktu pengisian lebih singkat dicapai dengan menggunakan pengisi daya baterai DC1002
- Didukung oleh baterai built-in 12Vmax Lithium-Ion dengan daya adaptor AC
- Tombol sakelar dengan pemilihan volume udara (Kuat/Tinggi/Normal) untuk mengurangi kelelahan dalam penggunaan terus menerus



Floor Nozzle, Sash Nozzle, Sash Nozzle Holder, Pipe, Dust Bag, Paper Dust Bag, Charger

Capacity	Dust Bag / Paper Pack: 500 / 330 mL
Continuous Use	Powerful / High / Normal: 10 / 18 / 55 min
Max Air Flow	1,4 m <sup>3</sup> /menit
Max Sealed Suction (water column)	5,0 kPa (510 mmH <sub>2</sub> O)
Suction Power	Max / High / Normal: 35 / 20 / 5 W
Dimensions (L x W x H) w/ Pipe & Nozzle:	983 x 113 x 136 mm
Net weight	1,1 kg

**CL104D****10.8V/1.5Ah built-in Li-Ion Battery**

Cordless Cleaner



- Desain baru
- Daya tinggi
- Mode turbo memungkinkan daya hisap yang lebih tinggi



Charger, Battery cartridge, Nozzle assembly, Sash nozzle, Pipe, Filter (factory-mounted), Pre-filter (factory-mounted)

Capacity	Dust Bag / Paper Pack: 500 / 330 mL
Max Air Flow	1,3 m <sup>3</sup> /menit
Continuous Use	Turbo / High / Low: 10 / 15 / 30 menit
Max Sealed Suction (water column)	3,2 kPa (326 mmH <sub>2</sub> O)
Dimensions (L x W x H)	983 x 113 x 136 mm
Net weight	1,1 kg



# Outdoor

## MR002G

Job Site Radio

12Vmax-40Vmax CXT LXT XGT Li-Ion Cordless Bluetooth Job Site Radio



Run time (approx)	w/ BL4040: 27,5 h
Frequency Band	FM / AM: 87,5 - 108 MHz / 522 - 1.710 kHz
Speaker Size	Dia. 89 mm x2
Dimensions (L x W x H)	280 x 171 x 434 mm
Net weight	4,5 - 5,3 kg

**CXT LXT XGT** Bluetooth



AC Adaptor, AA Battery

## MR004G

Job Site Radio

12Vmax-40Vmax CXT LXT XGT Li-Ion Cordless Bluetooth Job Site DAB / DAB+ Radio



Run time (approx)	w/ BL4040: 30 h
Frequency Band	FM / DAB / DAB+: 87,5 - 108 MHz / 174,928 - 239,200 MHz / 174,928 - 239,200 MHz
Speaker Size	Dia. 89 mm x2
Dimensions (L x W x H)	280 x 171 x 434 mm
Net weight	4,6 - 5,4 kg

**CXT LXT XGT** Bluetooth **dab+**



AC Adaptor

## DMR116

Job Site Radio

14.4V-18V LXT Li-Ion Cordless Job Site Radio



Run time (approx)	w/ BL1850(B): 31 h
Frequency Band	FM / AM: 87,5 - 108 MHz / 522 - 1.710 kHz
Speaker Size	Dia. 76 mm x2
Dimensions (L x W x H)	257 x 163 x 431 mm
Net weight	4,4 - 4,7 kg

**LXT**



new

AC Adaptor, AA Battery

## DMR108N

Job Site Radio

10.8V-18V CXT LXT Li-Ion Cordless Job Site Radio



Run time (approx)	w/ BL1850B: 28 h
Frequency Band	FM / AM: 87,5 - 108 MHz / 522 - 1.710 kHz
Speaker Size	Dia. 89 mm x2
Dimensions (L x W x H)	262 x 163 x 431 mm
Net weight	4,4 - 4,9 kg

**CXT LXT** Bluetooth



new

AC Adaptor, AA Battery

## DMR110N

Job Site Radio

10.8V-18V CXT LXT Li-Ion Cordless Job Site Radio



Run time (approx)	w/ BL1850B: 26 h
Frequency Band	FM / DAB / DAB+: 87,5 - 108 MHz / 174,928 - 239,200 MHz / 174,928 - 239,200 MHz
Speaker Size	Dia. 76 mm x2
Dimensions (L x W x H)	262 x 163 x 431 mm
Net weight	4,3 - 4,9 kg

**CXT LXT DAB**



new

AC Adaptor

## CF002G / DCF301

Cordless Fan

40Vmax XGT Li-Ion Cordless 330 mm (13") Fan (CF002G)  
18V / 14.4V LXT Li-Ion Cordless 330 mm (13") Fan (DCF301)



Continuous Use w/o oscillation	CF002G: w/ BL4040 Low / Mid / High: 1.020 / 640 / 320 min DCF301: w/ BL1860B Low / Mid / High: 850 / 430 / 215 min
Max Air Velocity	High / Mid / Low: 240 / 170 / 120 m/min
Air Flow	High / Mid / Low: 21 / 15 / 10 m <sup>3</sup> /min
Fan size	330 mm (13")
Dimensions (L x W x H)	CF002G: 277 x 439 x 602 mm DCF301: 269 x 439 x 602 mm
Net weight	CF002G: 3,8 - 5,1 kg DCF301: 3,8 - 4,5 kg

**XGT** CF002G **LXT** DCF301



AC Adaptor

## CW001G

Cordless Cooler &amp; Warmer Box

18V LXT / 40Vmax XGT Cordless Cooler & Warmer Box



Run Time (hrs)	w/ BL4050 X2, -18 / 5 / 60°C: 10 / 28 / 8,5 hrs
Capacity	20 L (5,3 gal)
Cooling Capacity	-18 / -15 / -10 / -5 / 0 / 5 / 10°C
Warming Capacity	30 / 35 / 40 / 45 / 50 / 55 / 60°C
Pemanasan	
Dimensions (L x W x H)	663 x 341 x 372 mm
Net weight	13,8 - 16,1 kg

**LXT XGT**



new

Shoulder Belt, AC Adaptor, Cigar Socket Cable

## DKT360

Cordless Kettle

18Vx2 LXT Li-Ion Cordless Kettle



Boiling time	8 min (0,8 L water from 23°C)
Water tank capacity	0,8 L
Dimensions (L x W)	233 x 263 x 307 mm
Net weight	2,7 - 3,4 kg

**LXT**



new

Fast charger



# Fan Jacket Fan Vest

DFJ216 / DFJ312 / DFJ416 /  
DFJ212 / DFJ213 / DFJ214 /  
DFV210 / DFV214 / DFV215



## Cordless Fan Jacket Cordless Fan Vest

### Unit kipas



**BL  
MOTOR**

Tipis, unit kipas yang datar tidak mengganggu pengoperasian Anda.



38mm

Penutup kipas yang dapat dilepas memungkinkan pembersihan pisau kipas dengan mudah.

**XPT**



### Cordless Fan Vest

### Cordless Fan Jacket

**Polyester cotton blend**  
(65% polyester / 35% cotton)

**Polyester**  
Moisture-permeable,  
water-repellent fabric

**Polyester**  
Moisture-permeable,  
water-repellent fabric

**Polyester**  
Moisture-permeable,  
water-repellent fabric

**Polyester**  
Stretchable fabric

DFV215A

18V  
12V max



new

DFV214A

18V  
12V max



new

DFV210A

18V  
12V max



DFJ212A

18V  
12V max



DFJ213A

18V  
12V max



### Fitur



Pakaian di bawah rompi terlihat, memungkinkan pengguna untuk memakai seragam kerja.

DFV214A



Lapisan antibakteri dan deodoran

- DFV215A
- DFJ213A
- DFV214A
- DFJ312A
- DFV210A
- DFJ416A
- DFJ212A



Lingkaran sabuk

- DFV214A



Masukkan slider pendukung

- DFV210A
- DFJ212A



Tali serut yang dapat disesuaikan

- DFV210A




Tali velcro untuk penyesuaian manset

- DFJ212A



Saku lengan

- DFJ212A
- DFJ214A



Tudung kepala yang dapat disimpan

- DFJ212A



Saku pulpen



- DFJ213A
- DFJ312A
- DFJ216A
- DFJ416A

# Cordless Fan Jacket / Cordless Fan Vest


## Perbandingan kenaikan suhu tubuh selama bekerja

Suhu kulit setelah 10 menit bekerja di bawah suhu 35° C dan kelembaban 60%

Jangan pernah gunakan jaket kipas yang suhunya mencapai lebih dari 50°C (122°F). Jika tidak, dapat menyebabkan luka bakar pada kulit Anda. Juga hindari penggunaan dalam kelembaban yang tinggi.



tanpa Jaket



dengan Jaket (DFJ212A)


## "Sirkulasi udara dalam" asli Makita

- DFV215A
- DFV214A
- DFV210A
- DFJ212A
- DFJ214A
- DFJ213A
- DFJ312A
- DFJ416A



Lapisan breathable

**SIRKULASI UDARA**  
Cordless Fan Jacket



memungkinkan udara masuk melalui bagian luar jaket dan lapisan dalam membuat Anda tetap sejuk dan merasa nyaman.

## Penggunaan kain berperforma tinggi agar sesuai dengan berbagai pengoperasian



kelembaban yang dapat diserap

### Kain anti air dan mudah menyerap

- DFV214A
- DFV210A
- DFJ212A

air hampir tidak menembus bahkan tekanan tahan air mencapai 1.000 mm



### Kain dapat diregangkan

- DFJ213A

ringan, elastis, tahan angin dan nyaman dipakai



### Kain anti air dan antistatik

- DFJ214A

anti air dan kemampuan dalam menyerap air membuat rasa pengap berkurang

Polyester Water-repellent, antistatic fabric	Polyester	Cotton	Polyester + Titaniumprocessing
<b>DFJ214A</b> 18V 12V max 	<b>DFJ216A</b> 18V 12V max 	<b>DFJ312A</b> 18V 12V max 	<b>DFJ416A</b> 18V 12V max 

<p>Ritsleting dapat dilepas dengan cepat ■ DFJ213A ■ DFJ214A</p>	<p>Tombol kancing dan karet yang dapat disesuaikan ■ DFJ213A ■ DFJ214A</p>	<p>Antistatik ■ DFJ214A</p>	<p>Bahan retroreflektif ■ DFJ214A</p>	<p>Saku jaring untuk bungkus es ■ DFJ216A</p>	<p>Lengan yang bisa dilepas ■ DFJ312A</p>	<p>Saku pengikat ■ DFJ312A</p>	<p>Lengan ritsleting yang bisa dilepas ■ DFJ416A</p>	<p>Bantalan bahu ■ DFJ416A</p>	<p>Loop untuk memasang peniti ■ DFJ416A</p>
--	--	---------------------------------	---	---	---	------------------------------------	--	------------------------------------	---

## Ukuran Jaket

### Vest

foto: DFV210A



### Jaket

foto: DFJ216A



DFV215A	S	M	L	XL	2XL	3XL
Panjang	63/67	65/69	67/71	69/72	71/73	73/74
Bahu	39/43	41/45	43/47	45/49	47/51	49/53
Dada	106/113	111/118	116/123	121/128	126/133	131/138
Pinggang	100/107	105/112	110/117	115/122	120/127	125/132

DFV214A	FA (S~L)			FB (XL~3XL)		
Panjang	49/53			55/57		
Bahu	39/41			42/44		
Dada	103~122/110~129			112~131/119~138		
Pinggang	98~117/105~124			107~126/114~133		

DFV210A	S	M	L	XL	2XL	3XL
Panjang	63/67	65/69	67/71	69/72	71/73	73/74
Bahu	39/43	41/45	43/47	45/49	47/51	49/53
Dada	106/113	111/118	116/123	121/128	126/133	131/138
Pinggang	100/107	105/112	110/117	115/122	120/127	125/132

DFJ212A	S	M	L	XL	2XL	3XL
Panjang	62/66	64/68	66/70	68/71	70/72	72/73
Bahu	40/44	42/46	44/48	46/50	48/52	50/54
Lengan baju	79/87	82/90	85/93	88/95	91/97	92/99
Dada	108/117	113/122	118/127	123/132	128/137	133/142
Pinggang	102/111	107/116	112/121	117/126	122/131	127/136

DFJ213A	S	M	L	XL	2XL	3XL
Panjang	61/65	63/67	65/69	67/70	69/71	70/72
Bahu	43/47	45/49	47/51	49/53	51/55	53/57
Lengan baju	58/62	60/64	62/66	64/67	66/68	66/69
Dada	109/117	114/122	119/127	124/132	129/137	134/142
Pinggang	95~103/ 103~111	100~108/ 108~116	105~113/ 113~121	110~118/ 118~126	115~123/ 123~131	120~128/ 128~136

DFJ214A	S	M	L	XL	2XL	3XL
Panjang	64/68	66/70	68/72	70/73	72/74	73/75
Bahu	43/47	45/49	47/51	49/53	51/55	53/57
Lengan baju	58/62	60/64	62/66	64/67	66/68	66/69
Dada	109/117	114/122	119/127	124/132	129/137	134/142
Pinggang	95~103/ 103~111	100~108/ 108~116	105~113/ 113~121	110~118/ 118~126	115~123/ 123~131	120~128/ 128~136

DFJ216A	S	M	L	XL	2XL	3XL
Panjang	63/67	65/69	67/71	69/72	71/73	72/74
Bahu	58/62	60/64	62/66	64/67	66/68	66/69
Lengan baju	43/47	45/49	47/51	49/53	51/55	53/57
Dada	111/119	116/124	121/129	126/134	131/139	136/144
Pinggang	81~105/ 89~113	86~110/ 94~118	91~115/ 99~123	96~120/ 104~128	101~125/ 109~133	106~130/ 114~138

DFJ312A	S	M	L	XL	2XL	3XL
Panjang	62/68	64/70	66/72	68/74	70/76	72/78
Bahu	50/56.5	52/59	54/61.5	56/64	58/66.5	60/69
Lengan baju	52/58	54/60	56/62	58/64	60/66	62/68
Dada	114/126	118/131	122/136	126/141	130/146	134/151
Pinggang	74~105/ 87~113	78~109/ 92~113	82~113/ 97~113	86~117/ 102~113	90~121/ 109~138	94~125/ 112~143

DFJ416A	S	M	L	XL	2XL	3XL
Panjang	61/65	63/67	65/69	67/70	69/71	70/72
Bahu	43/47	45/49	47/51	49/53	51/55	53/57
Lengan baju	58/62	60/64	62/66	64/67	66/68	66/69
Dada	111/119	116/124	121/129	126/134	131/139	136/144
Pinggang	95~105/ 103~113	100~110/ 108~118	105~115/ 113~123	110~120/ 118~128	115~125/ 123~133	120~130/ 128~138

Ukuran Asia/Ukuran UNI EROPA & AS  
(dalam cm)

# PRODUCTS

▣ DRILLING / FASTENING



# Drilling / Fastening

## Impact Driver

TD0101



411	Continuous rating Input	230 W
	Capacity	Machine Screw: M4 - M8 (5/32 - 5/16") Standard Bolt: M5 - M14 (3/16 - 9/16") High Strength Bolt: M5 - M10 (3/16 - 3/8") Coarse thread (in length): 22 - 90 mm (7/8 - 3-1/2")
	Driving Shank (Hex)	6,35 mm (1/4")
	No Load Speed	0 - 3.600 RPM
	Impacts Per Minute	0 - 3.200 IPM
	Max Fastening Torque	100 N·m (74 ft.lbs.)
	Dimensions (L x W x H)	184 x 67 x 192 mm
	Net weight	0,99 kg
	Power supply cord	2,5 m (8,2 ft)



## Drill

DS4011  
13 mm (1/2")



411	Continuous rating Input	750 W
	Capacity	Steel: 13 mm (1/2") Wood: 36 mm (1-7/16") Wood (Self-Feed Bit): 127 mm (5")
	Chuck Capacity	2 - 13 mm (1/16 - 1/2")
	No Load Speed	600 RPM
	Dimensions (L x W x H)	340 x 83 x 401 mm
	Net weight	2,8 kg
	Power supply cord	2,5 m (8,2 ft)



## Drill

DP4003  
13 mm (1/2")



419	Continuous rating Input	750 W
	Capacity	Steel: 13 mm (1/2") Wood: 38 mm (1-1/2") Wood (Self-Feed Bit): 76 mm (3")
	Chuck Capacity	1,5 - 13 mm (1/16 - 1/2")
	No Load Speed	0 - 700 RPM
	Overall Length	308 mm
	Net weight	2,5 kg
	Power supply cord	2,5 m (8,2 ft)



## Drill

DP3003  
10 mm (3/8")



419	Continuous rating Input	710 W
	Capacity	Steel: 10 mm (3/8") Wood: 32 mm (1-1/4") Wood (Self-Feed Bit): 64 mm (2-1/2")
	Chuck Capacity	0,8 - 10 mm (1/32 - 3/8")
	No Load Speed	0 - 1.200 RPM
	Overall Length	296 mm
	Net weight	2,2 kg
	Power supply cord	2,5 m (8,2 ft)



## Drill

6412  
10 mm (3/8")



64	Continuous rating Input	450 W
	Capacity	Steel: 10 mm (3/8") Wood: 25 mm (1") Wood (Self-Feed Bit): 50 mm (2")
	Chuck Capacity	1,5 - 10 mm (1/16 - 3/8")
	No Load Speed	0 - 3.400 RPM
	Dimensions (L x W x H)	228 x 64 x 183 mm
	Net weight	1,3 kg
	Power supply cord	2,0 m (6,6 ft)



## Angle Drill

DA3010F  
10 mm (3/8")



419	Continuous rating Input	450 W
	Capacity	Steel: 10 mm (3/8") Wood: 25 mm (1") Wood (Self-Feed Bit): 50 mm (2")
	Chuck Capacity	1,5 - 10 mm (1/16 - 3/8")
	No Load Speed	0 - 2.400 RPM
	Overall Length	270 mm
	Net weight	1,6 kg
	Power supply cord	2,5 m (8,2 ft)




## Mixer

UT2204



303	Continuous rating Input	850 W
	Blade Diameter	220 mm (8-5/8")
	No Load Speed	550 RPM
	Dimensions (L x W x H)	929 x 89 x 152 mm
	Net weight	2,7 kg
	Power supply cord	2,5 m (8,2 ft)

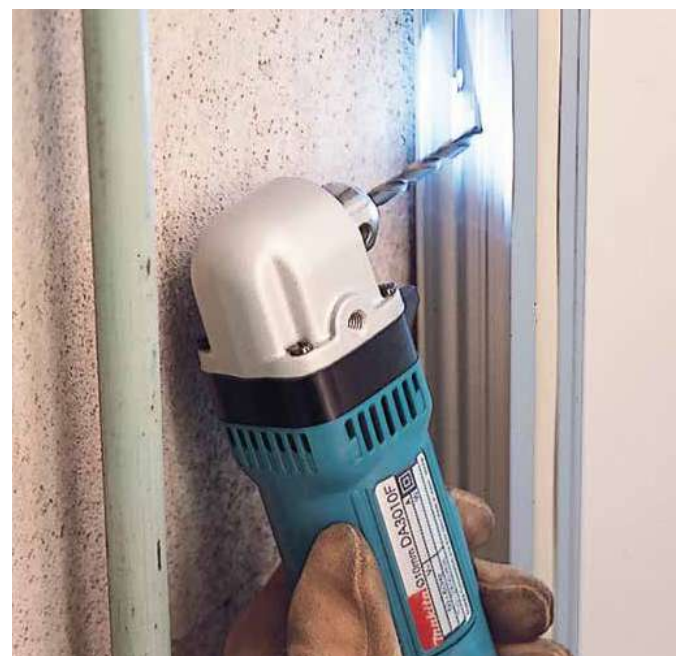

## Drywall Screwdriver

FS6300



419	Continuous rating Input	570 W
	Capacity	Drywall Screw: 4 mm (5/32")
	Driving Shank (Hex)	6,35 mm (1/4")
	No Load Speed	0 - 6.000 RPM
	Dimensions (L x W x H)	279 x 65 x 207 mm
	Net weight	1,4 kg
	Power supply cord	2,5 m (8,2 ft)

Dimensions: for countries providing noise suppressor and connect bit 60



# Drilling / Fastening

## Impact Wrench

153 mm

**TW1000**  
1" (25.4 mm)



Continuous rating Input	1.200W
Fastening Capacities	Standard Bolt: M24 - M30 (1 5/16 - 1-3/16")
	High Strength Bolt: M22 - M24 (7/8 - 1 5/16")
Square Drive	25,4 mm (1")
No Load Speed	1.400 RPM
Impacts Per Minute	1.500 IPM
Max Fastening Torque	1.000 N·m (738 ft.lbs.)
Dimensions (L x W x H)	382 x 110 x 290 mm
Net weight	8,8 kg
Power supply cord	2,5 m (8,2 ft)

## Impact Wrench

100 mm

**6906**  
3/4" (19 mm)



Continuous rating Input	850W
Fastening Capacities	Standard Bolt: M16 - M22 (5/8 - 7/8")
	High Strength Bolt: M16 - M20 (5/8 - 3/4")
Square Drive	19 mm (3/4")
No Load Speed	1.700 RPM
Impacts Per Minute	1.600 IPM
Max Fastening Torque	588 N·m (441 ft.lbs.)
Overall Length	327 mm
Net weight	5,6 kg
Power supply cord	2,5 m (8,2 ft)

## Impact Wrench

411 mm

**TW0350**  
1/2" (12.7 mm)



Continuous rating Input	400W
Fastening Capacities	Standard Bolt: M12 - M22 (1/2 - 7/8")
	High Strength Bolt: M12 - M16 (1/2 - 5/8")
	Square Drive
No Load Speed	2.000 RPM
Impacts Per Minute	2.000 IPM
Max Fastening Torque	350 N·m (260 ft.lbs.)
Dimensions (L x W x H)	283 x 87 x 233 mm
Net weight	3 kg
Power supply cord	2,5 m (8,2 ft)

## Shear Wrench

303 mm

**6924N**  
M22 (7/8"), M24 (1"), SHTB22



Continuous rating Input	1.050W
Capacity	Super high tensile bolt: M22
No Load Speed	19 RPM
Max Fastening Torque	1.100 N·m (810 ft.lbs.)
Dimensions (L x W x H)	330 x 104 x 257 mm
Net weight	7,5 kg
Power supply cord	2,5 m (8,2 ft)

## Shear Wrench

411 mm

**6922NB**  
M16 (5/8"), M20 (3/4"), M22 (7/8")



Continuous rating Input	1.330W
No Load Speed	18 RPM
Max Fastening Torque	804 N·m (593 ft.lbs.)
Dimensions (L x W x H)	249 x 84 x 252 mm
Net weight	4,9 kg
Power supply cord	2,5 m (8,2 ft)



# PRODUCTS

## ▣ IMPACT DRILLING / DEMOLITION



# Impact Drilling / Demolition

## 2-Speed Hammer Drill

**HP2050**  
20 mm (3/4")



Continuous rating Input	720W
Capacity	Concrete: 20 mm (3/4") Steel Hi: 8 mm (5/16") Steel Lo: 13 mm (1/2") Wood Hi: 25 mm (1") Wood Lo: 40 mm (1-9/16")
Chuck Capacity	1,5 - 13 mm (1/16 - 1/2")
Impacts Per Minute	High: 0 - 58.000 IPM Low: 0 - 24.000 IPM
No Load Speed	High: 0 - 2.900 RPM
Overall Length	362 mm
Net weight	2,5 kg
Power supply cord	2,5 m (8,2 ft)

## Hammer Drill

**HP1630**  
16 mm (5/8")



Continuous rating Input	710W
Capacity	Concrete: 16 mm (5/8") Steel: 13 mm (1/2") Wood: 30 mm (1-3/16") Wood (Self-Feed Bit): 60 mm (2-3/8") Masonry: 16 mm (5/8")
Chuck Capacity	1,5 - 13 mm (1/16 - 1/2")
Blows Per Minute	0 - 48.000 BPM
No Load Speed	0 - 3.200 RPM
Dimensions (L x W x H)	296 x 75 x 204 mm
Net weight	2,1 kg
Power supply cord	2,0 m (6,6 ft)

## Combination Hammer

**HR2810X5**  
28 mm (1-1/8"), Adapted for SDS-PLUS bits



Continuous rating Input	800W
Impact Energy	EPTA-Procedure 05/2009: 2,8 J
Capacity	Concrete (w/ TCT Bit): 28 mm (1-1/8") Steel: 13 mm (1/2") Wood: 32 mm (1-1/4") Wood (Self-Feed Bit): 32 mm (1-1/4") Masonry: 28 mm (1-1/8")
Chuck Capacity	1,5 - 13 mm (1/16 - 1/2")
Blows Per Minute	0 - 4.500 BPM
No Load Speed	0 - 1.100 RPM
Dimensions (L x W x H)	314 x 89 x 225 mm
Net weight	3,4 - 3,8 kg
Power supply cord	2,5 m (8,2 ft)

## Combination Hammer

**HR2631FX5**  
26 mm (1"), Adapted for SDS-PLUS bits



Continuous rating Input	800W
Impact Energy	EPTA-Procedure 05/2009: 2,4 J
Capacity	Concrete: 26 mm (1") Steel: 13 mm (1/2") Wood: 32 mm (1-1/4") Wood (Self-Feed Bit): 32 mm (1-1/4") Masonry: 26 mm (1")
Chuck Capacity	1,5 - 13 mm (1/16 - 1/2")
Blows Per Minute	0 - 4.600 BPM
No Load Speed	0 - 1.200 RPM
Dimensions (L x W x H)	361 x 77 x 209 mm
Net weight	2,9 - 3,4 kg
Power supply cord	2,5 m (8,2 ft)

## Combination Hammer

**HR2470X5**  
24 mm (15/16"), Adapted for SDS-PLUS bits



Continuous rating Input	780W
Impact Energy	EPTA-Procedure 05/2009: 2,4 J
Capacity	Concrete: 24 mm (15/16") Steel: 13 mm (1/2") Wood: 32 mm (1-1/4") Wood (Self-Feed Bit): 32 mm (1-1/4") Masonry: 24 mm (15/16")
Chuck Capacity	1,5 - 13 mm (1/16 - 1/2")
Blows Per Minute	0 - 4.500 BPM
No Load Speed	0 - 1.100 RPM
Dimensions (L x W x H)	370 x 84 x 214 mm
Net weight	2,9 - 3,3 kg
Power supply cord	4,0 m (13,1 ft)

## Rotary Hammer

**HR5212C**  
52 mm (2-1/16"), Adapted for SDS-MAX bits



Continuous rating Input	1.510W
Impact Energy	EPTA-Procedure 05/2009: 20 J
Capacity	Concrete (w/ TCT Bit): 52 mm (2") Masonry: 52 mm (2")
Blows Per Minute	1.100 - 2.250 BPM
No Load Speed	150 - 310 RPM
Dimensions (L x W x H)	599 x 140 x 287 mm
Net weight	11,9 - 12 kg
Power supply cord	5,0 m (16,4 ft)

## Rotary Hammer

**HR4013C**  
40 mm (1-9/16"), Adapted for SDS-MAX bits



Continuous rating Input	1.100W
Impact Energy	EPTA-Procedure 05/2009: 8 J
Capacity	Concrete (w/ TCT Bit): 40 mm (1-9/16") Masonry: 40 mm (1-9/16")
Blows Per Minute	1.450 - 2.900 BPM
No Load Speed	250 - 500 RPM
Dimensions (L x W x H)	479 x 112 x 263 mm
Net weight	6,8 - 6,9 kg
Power supply cord	5,0 m (16,4 ft)

## Rotary Hammer

**HR3541FC**  
35 mm (1-3/8"), Adapted for SDS-MAX bits



Continuous rating Input	850W
Impact Energy	EPTA-Procedure 05/2009: 5,7 J
Capacity	Concrete (w/ TCT Bit): 35 mm (1-3/8") Steel: 13 mm (1/2") Wood: 32 mm (1-1/4") Wood (Self-Feed Bit): 32 mm (1-1/4") Masonry: 35 mm (1-3/8")
Chuck Capacity	1,5 - 13 mm (1/16 - 1/2")
Blows Per Minute	1.650 - 3.300 BPM
No Load Speed	315 - 630 RPM
Dimensions (L x W x H)	439 x 114 x 239 mm
Net weight	5,6 - 5,7 kg
Power supply cord	5,0 m (16,4 ft)

## Rotary Hammer

**HR3001CJ**  
30 mm (1-3/16") Adapted for SDS-PLUS bits



Continuous rating Input	1.050W
Impact Energy	EPTA-Procedure 05/2009: 3,9 J
Capacity	Concrete (w/ TCT Bit): 30 mm (1-3/16") Concrete (w/ Diamond Core Bit): 80 mm (3-1/8") Steel: 13 mm (1/2") Wood: 32 mm (1-1/4") Wood (Self-Feed Bit): 32 mm (1-1/4") Masonry: 30 mm (1-3/16")
Chuck Capacity	1,5 - 13 mm (1/16 - 1/2")
Blows Per Minute	0 - 4.500 BPM
No Load Speed	0 - 840 RPM
Dimensions (L x W x H)	369 x 98 x 226 mm
Net weight	4,1 - 4,5 kg
Power supply cord	4,0 m (13,1 ft)

## Rotary Hammer

**HR3011FCJ**  
30 mm (1-3/16") Adapted for SDS-PLUS bits



Continuous rating Input	1.050W
Impact Energy	EPTA-Procedure 05/2009: 3,9 J
Capacity	Concrete (w/ TCT Bit): 30 mm (1-3/16") Concrete (w/ Diamond Core Bit): 80 mm (3-1/8") Steel: 13 mm (1/2") Wood: 32 mm (1-1/4") Wood (Self-Feed Bit): 32 mm (1-1/4") Masonry: 30 mm (1-3/16")
Chuck Capacity	1,5 - 13 mm (1/16 - 1/2")
Blows Per Minute	0 - 4.500 BPM
No Load Speed	0 - 840 RPM
Dimensions (L x W x H)	369 x 98 x 242 mm
Net weight	4,4 - 4,8 kg
Power supply cord	4,0 m (13,1 ft)

## Rotary Hammer

**HR2460X5**  
24 mm (15/16") Adapted for SDS-PLUS bits



Continuous rating Input	780W
Impact Energy	EPTA-Procedure 05/2009: 2,4 J
Capacity	Concrete: 24 mm (15/16") Steel: 13 mm (1/2") Wood: 32 mm (1-1/4") Wood (Self-Feed Bit): 32 mm (1-1/4") Masonry: 24 mm (15/16")
Chuck Capacity	1,5 - 13 mm (1/16 - 1/2")
Blows Per Minute	0 - 4.500 BPM
No Load Speed	0 - 1.100 RPM
Dimensions (L x W x H)	362 x 84 x 214 mm
Net weight	2,8 - 3,2 kg
Power supply cord	2,5 m (8,2 ft)

## Rotary Hammer

**HR2230X5**  
22 mm (7/8") Adapted for SDS-PLUS bits



Continuous rating Input	710W
Impact Energy	EPTA-Procedure 05/2009: 2,2 J
Capacity	Concrete (w/ TCT Bit): 22 mm (7/8") Concrete (w/ Diamond Core Bit): 65 mm (2-9/16") Steel: 13 mm (1/2") Wood: 32 mm (1-1/4") Wood (Self-Feed Bit): 32 mm (1-1/4") Masonry: 22 mm (7/8")
Chuck Capacity	1,5 - 13 mm (1/16 - 1/2")
Blows Per Minute	0 - 4.050 BPM
No Load Speed	0 - 1.050 RPM
Dimensions (L x W x H)	357 x 84 x 214 mm
Net weight	2,6 - 3,1 kg
Power supply cord	2,5 m (8,2 ft)

# Impact Drilling / Demolition

## Demolition Hammer

105 mm

**HM0810A**  
11/16" : 17 mm Hex Shank



Continuous rating Input 900W  
Blows Per Minute 2.900 BPM  
Overall Length 410 mm (16-1/8")  
Net weight 6,7 kg (14,7 lbs.)  
Power supply cord 5,0 m (16,4 ft)

## Demolition Hammer

350 mm

**HM0871C**  
Adapted for SDS-MAX bits



Continuous rating Input 1.100W  
Impact Energy EPTA-Procedure 05/2009: 8,1 J  
Blows Per Minute 1.100 - 2.650 BPM  
Dimensions (L x W x H) 466 x 116 x 230 mm  
Net weight 5,6 - 5,8 kg  
Power supply cord 5,0 m (16,4 ft)

## Demolition Hammer

155 mm

**HM1201**  
13/16" : 21 mm Hex Shank



Continuous rating Input 1.130W  
Blows Per Minute 2.000 BPM  
Overall Length 480 mm (18-7/8")  
Net weight 9,1 kg  
Power supply cord 5,0 m (16,4 ft)

## Demolition Hammer

175 mm

**HM1213C**  
Adapted for SDS-MAX bits



Continuous rating Input 1.510W  
Impact Energy EPTA-Procedure 05/2009: 18,6 J  
Blows Per Minute 900 - 1.900 BPM  
Dimensions (L x W x H) 576 x 149 x 265 mm  
Net weight 10,8 kg  
Power supply cord 5,0 m (16,4 ft)

## Electric Breaker

175 mm

**HM1317C**  
1-3/16" : 30 mm Hex Shank



Continuous rating Input 1.510W  
Impact Energy EPTA-Procedure 05/2009: 25 J  
Blows Per Minute 730 - 1.450 BPM  
Dimensions (L x W x H) 715 x 129 x 266 mm  
Net weight 17 kg  
Power supply cord 5,0 m (16,4 ft)

## Demolition Hammer

204 mm

**HM1306**  
1-3/16" : 30 mm Hex Shank



Continuous rating Input 1.510W  
Impact Energy EPTA-Procedure 05/2009: 21,7 J  
Blows Per Minute 1.450 BPM  
Dimensions (L x W x H) 652 x 121 x 231 mm  
Net weight 15,1 kg  
Power supply cord 5,0 m (16,4 ft)

## Electric Breaker

218 mm

**HM1501X1**  
1-3/16" : 30 mm Hex Shank



Continuous rating Input 1.850W  
Impact Energy EPTA-Procedure 05/2009: 48,1 J  
Blows Per Minute 1.300 BPM  
Dimensions (L x W x H) 781 x 130 x 266 mm  
Net weight 18,4 kg  
Power supply cord 4,0 m (13,1 ft)

## Electric Breaker

218 mm

**HM1511X1**  
1-3/16" : 30 mm Hex Shank



Continuous rating Input 1.850W  
Impact Energy EPTA-Procedure 05/2009: 48,9 J  
Blows Per Minute 1.300 BPM  
Dimensions (L x W x H) 781 x 130 x 266 mm  
Net weight 19,2 kg  
Power supply cord 4,0 m (13,1 ft)

## Electric Breaker

204 mm

**HM1810**  
1-1/8" : 28,6 mm Hex Shank



Continuous rating Input 2.000W  
Impact Energy EPTA-Procedure 05/2009: 63 J  
Blows Per Minute 1.100 BPM  
Dimensions (L x W x H) 824 x 148 x 624 mm  
Net weight 32 kg  
Power supply cord 5,0 m (16,4 ft)

## Electric Breaker

218 mm

**HM1812**  
1-1/8" : 28,6 mm Hex Shank



Continuous rating Input 2.000W  
Impact Energy EPTA-Procedure 05/2009: 72,8 J  
Blows Per Minute 870 BPM  
Dimensions (L x W x H) 843 x 210 x 608 mm  
Net weight 31,3 kg  
Power supply cord 5,0 m (16,4 ft)

## Power Scraper

218 mm

**HK1820**  
Adapted for SDS-PLUS bits



Continuous rating Input 550W  
Impact Energy EPTA-Procedure 05/2009: 3,1 J  
Blows Per Minute 0 - 3.200 BPM  
Dimensions (L x W x H) 351 x 102 x 203 mm  
Net weight 3,4 kg  
Power supply cord 5,0 m (16,4 ft)



# PRODUCTS

## ▣ CUTTING



# Cutting

## Angle Cutter

**4112HS**  
305 mm (12")



Continuous rating Input	1.650W
Wheel Diameter	305 mm (12")
Hole Diameter	25,4 mm (1")
Capacity	Max cutting: 100 mm (4")
No Load Speed	5.000 RPM
Overall Length	648 mm
Net weight	10,4 kg
Power supply cord	2,5 m (8,2 ft)



## Cutter

**4107R**  
180 mm (7-1/8")



Continuous rating Input	1.400W
Capacity	Max cutting: 60 mm (2-3/8")
Blade Diameter	180 mm (7-1/8")
No Load Speed	5.000 RPM
Overall Length	370 mm
Net weight	6,3 kg
Power supply cord	5,0 m (16,4 ft)



## Portable Cut-off

**2416S**  
405 mm (16")



Continuous rating Input	1.430W
Wheel Diameter	405 mm (16")
Hole Diameter	25,4 mm (1")
No Load Speed	2.300 RPM
Dimensions (L x W x H)	610 x 265 x 535 mm
Net weight	19,2 kg
Power supply cord	2,5 m (8,2 ft)

## Portable Cut-off

**2414NB**  
355 mm (14")



Continuous rating Input	2.000 W
Wheel Diameter	355 mm (14")
Hole Diameter	25,4 mm (1")
No Load Speed	3.800 RPM
Dimensions (L x W x H)	500 x 280 x 600 mm
Net weight	16,4 kg
Power supply cord	2,5 m (8,2 ft)



## Metal Cutting Saw

**LC1230**  
305 mm (12")



Continuous rating Input	1.750 W
Blade Diameter	305 mm (12")
Hole Diameter	25,4 mm (1")
Max Cutting Capacity	0°: 115 mm (4-1/2") 45°: 90 mm (3-1/2")
No Load Speed	1.300 RPM
Dimensions (L x W x H)	516 x 306 x 603 mm
Net weight	19,3 kg
Power supply cord	2,5 m (8,2 ft)



## Metal Shear

**JS3201J**  
3.2 mm (10 Ga)



Continuous rating Input	710W
Capacity	Steel up to 400 N/mm <sup>2</sup> : 3,2 mm Steel up to 600 N/mm <sup>2</sup> : 2,5 mm Steel up to 800 N/mm <sup>2</sup> : 1,5 mm Aluminum up to 200 N/mm <sup>2</sup> : 4,0 mm
Min. cutting radius	50 mm (2")
Strokes Per Minute	1.600 SPM
Dimensions (L x W x H)	213 x 90 x 239 mm
Net weight	3,4 kg
Power supply cord	2,5 m (8,2 ft)



## Metal Shear

**JS1602**  
1.6 mm (16 Ga)



Continuous rating Input	380W
Capacity	Steel up to 400 N/mm <sup>2</sup> : 1,6 mm Steel up to 600 N/mm <sup>2</sup> : 1,2 mm Steel up to 800 N/mm <sup>2</sup> : 0,8 mm Aluminum up to 200 N/mm <sup>2</sup> : 2,5 mm
Min. cutting radius	30 mm (1-3/16")
Strokes Per Minute	4.000 SPM
Dimensions (L x W x H)	255 x 74 x 146 mm
Net weight	1,6 kg
Power supply cord	2,5 m (8,2 ft)



## Nibbler

**JN3201**  
3.2 mm (10 Ga)



Continuous rating Input	710W
Capacity	Steel up to 400 N/mm <sup>2</sup> : 3,2 mm Steel up to 600 N/mm <sup>2</sup> : 2,5 mm Steel up to 800 N/mm <sup>2</sup> : 1,0 mm Aluminum up to 200 N/mm <sup>2</sup> : 3,5 mm
Min. cutting radius	Outside edge: 128 mm (5-1/16") Inside edge: 120 mm (4-3/4")
Strokes Per Minute	1.300 SPM
Dimensions (L x W x H)	225 x 90 x 254 mm
Net weight	3,4 kg
Power supply cord	2,5 m (8,2 ft)



## Nibbler

**JN1601**  
1.6 mm (16 Ga)



Continuous rating Input	550W
Capacity	Steel up to 400 N/mm <sup>2</sup> : 1,6 mm Steel up to 600 N/mm <sup>2</sup> : 1,2 mm Steel up to 800 N/mm <sup>2</sup> : 0,8 mm Aluminum up to 200 N/mm <sup>2</sup> : 2,5 mm
Min. cutting radius	Outside edge: 50 mm (2") Inside edge: 45 mm (1-3/4")
Strokes Per Minute	2.200 SPM
Overall Length	261 mm
Net weight	1,6 kg
Power supply cord	2,0 m (6,6 ft)



## Aluminum Groove Cutter

**CA5000X**  
118 mm (4-5/8")



Continuous rating Input	1.300W
Wheel Diameter	118 mm (4-5/8")
Hole Diameter	20 mm (13/16")
Blade	Type: Cutter blade / TCT saw blade
Max cutting capacity w/ Cutter blade	w/ Guide rail: 11 mm (7/16")
Max cutting capacity w/ TCT Saw blade	w/ Guide rail: 36 mm (1-7/16") w/o Guide rail: 41 mm (1-5/8")
No Load Speed	2.200 - 6.400 RPM
Dimensions (L x W x H)	346 x 250 x 250 mm
Net weight	4,7 kg
Power supply cord	2,5 m (8,2 ft)



# PRODUCTS

## ▣ GRINDING / SANDING



# Grinding / Sanding

## Angle Grinder

### 2.800 W AFT D-Handle Angle Grinder, Anti-Restart Function, Soft Start, Mechanical Brake, Large Trigger Switch



**AFT**



	<b>GA7071</b>	<b>GA9071</b>
Continuous rating Input	2.800 W	2.800 W
Wheel Diameter	180 mm (7")	230 mm (9")
Hole Diameter	22,23 mm (7/8")	22,23 mm (7/8")
No Load Speed	8.500 RPM	6.600 RPM
Dimensions (L x W x H)	506 x 200 x 146 mm	506 x 250 x 146 mm
Net weight	6,2 - 6,7 kg	6,4 - 8,5 kg
Power supply cord	2,5 m (8,2 ft)	2,5 m (8,2 ft)

Anti-Vibration Grip, Wheel Cover, Lock Nut Wrench

## Angle Grinder

### 2.700 W Angle Grinder, Large Trigger Switch



without Rotatable Handle

	<b>GA7082</b>	<b>GA9082</b>
Continuous rating Input	2.700 W	2.800 W
Wheel Diameter	180 mm (7")	230 mm (9")
No Load Speed (RPM)	8.500 RPM	6.600 RPM
Dimensions (L x W x H)	499 x 200 x 144 mm	499 x 250 x 144 mm
Net weight	6,0 kg	6,1 kg
Power supply cord	2,5 m (8,2 ft)	2,5 m (8,2 ft)

Side Grip, Wheel Cover, Lock Nut Wrench

## Angle Grinder

### 2.200 W Angle Grinder, Large Trigger Switch



	<b>GA7020</b>	<b>GA9020</b>
Continuous rating Input	2.200 W	2.200 W
Wheel Diameter	180 mm (7")	230 mm (9")
Hole Diameter	22,23 mm (7/8")	22,23 mm (7/8")
No Load Speed	8.500 RPM	6.600 RPM
Dimensions (L x W x H)	473 x 200 x 140 mm	473 x 249 x 140 mm
Net weight	5,56 - 6,06 kg	5,76 - 8,05 kg
Power supply cord	2,5 m (8,2 ft)	2,5 m (8,2 ft)

Side Grip, Wheel Cover, Lock Nut Wrench

## Angle Grinder

### 2.000 W Angle Grinder, Anti-Restart Function, Soft Start, Large Trigger Switch



	<b>GA7050R01</b>
Continuous rating Input	2.000 W
Wheel Diameter	180 mm (7")
Hole Diameter	22,23 mm (7/8")
No Load Speed	8.500 RPM
Dimensions (L x W x H)	455 x 200 x 132 mm
Net weight	4,66 - 5,18 kg
Power supply cord	2,5 m (8,2 ft)

Side Grip, Wheel Cover, Lock Nut Wrench

## Angle Grinder

### 1.050 W SJS Angle Grinder, Finger Trigger Switch



	<b>GA5020</b>	<b>GA6020</b>
Continuous rating Input	1.050 W	1.050 W
Wheel Diameter	125 mm (5")	150 mm (6")
Hole Diameter	22,23 mm (7/8")	22,23 mm (7/8")
No Load Speed	12.000 RPM	10.000 RPM
Dimensions (L x W x H)	356 x 139 x 120 mm	356 x 169 x 120 mm
Net weight	2,7 - 3,9 kg	2,8 - 3,2 kg
Power supply cord	2,5 m (8,2 ft)	2,5 m (8,2 ft)

Depressed Center Wheel, Side Grip, Wheel Cover, Lock Nut Wrench

## Angle Grinder

### 1.400 W Angle Grinder, Soft Start, Slide Switch, X-LOCK



**XLOCK**



	<b>GA5080R</b>
Continuous rating Input	1.400 W
Wheel Diameter	125 mm (5")
Hole Diameter	22,3 mm (7/8")
Max Cutting Depth	31 mm (1-1/4")
No Load Speed	12.000 RPM
Circumference of Grip Portion	205 mm (8-1/8")
Dimensions (L x W x H)	309 x 141 x 113 mm
Net weight	2,5 - 3,6 kg
Power supply cord	2,5 m (8,2 ft)

Depressed Center Wheel, Side Grip, Wheel Cover

# Grinding / Sanding

## Angle Grinder

### 840 W Angle Grinder, Toggle Switch



<b>325</b>	<b>9558HNG</b>
Continuous rating Input	840 W
Wheel Diameter	125 mm (5")
Hole Diameter	22,23 mm (7/8")
No Load Speed	11.000 RPM
Dimensions (L x W x H)	271 x 139 x 106 mm
Net weight	1,7 - 3 kg
Power supply cord	2,5 m (8,2 ft)



Depressed Center Wheel, Side Grip, Wheel Cover, Lock Nut Wrench

## Angle Grinder

### 1.400 W SJS II Variable Speed Angle Grinder, Anti-Restart Function, Mechanical Brake, Soft Start, Slide Switch



<b>318</b>	<b>GA4041C</b>
Continuous rating Input	1.400 W
Wheel Diameter	100 mm (4")
Hole Diameter	16 mm (5/8")
No Load Speed	2.800 - 11.000 RPM
Dimensions (L x W x H)	325 x 117 x 117 mm
Net weight	2,5 - 2,8 kg
Power supply cord	2,5 m (8,2 ft)



Depressed Center Wheel, Side Grip, Wheel Cover, Lock Nut Wrench

## Angle Grinder

### 1.100 W SJS II Angle Grinder, Slide Switch



<b>325</b>	<b>GA4040</b>
Continuous rating Input	1.100 W
Wheel Diameter	100 mm (4")
Hole Diameter	16 mm (5/8")
No Load Speed	11.000 RPM
Dimensions (L x W x H)	303 x 117 x 111 mm
Net weight	2,2 - 2,5 kg
Power supply cord	2,5 m (8,2 ft)



Depressed Center Wheel, Side Grip, Wheel Cover, Lock Nut Wrench

## Angle Grinder

### 720 W Angle Grinder, Slide Switch



<b>459</b>	<b>GA4030</b>
Continuous rating Input	720 W
Wheel Diameter	100 mm (4")
Hole Diameter	16 mm (5/8")
No Load Speed	11.000 RPM
Dimensions (L x W x H)	266 x 117 x 95 mm
Net weight	1,73 - 2,02 kg
Power supply cord	2,5 m (8,2 ft)



Depressed Center Wheel, Side Grip, Wheel Cover, Lock Nut Wrench

## Angle Grinder

### 720 W Angle Grinder, Paddle Switch



<b>459</b>	<b>GA4034</b>
Continuous rating Input	720 W
Wheel Diameter	100 mm (4")
Hole Diameter	16 mm (5/8")
No Load Speed	11.000 RPM
Dimensions (L x W x H)	265 x 118 x 95 mm
Net weight	1,77 - 2,06 kg
Power supply cord	2,5 m (8,2 ft)



Depressed Center Wheel, Side Grip, Wheel Cover, Lock Nut Wrench

## Angle Grinder

### 710 W Angle Grinder, Toggle Switch



<b>325</b>	<b>9553B</b>
Continuous rating Input	710 W
Wheel Diameter	100 mm (4")
Hole Diameter	16 mm (5/8")
No Load Speed	11.000 RPM
Dimensions (L x W x H)	258 x 118 x 97 mm
Net weight	1,5 - 1,9 kg
Power supply cord	2,5 m (8,2 ft)



Depressed Center Wheel, Wheel Cover, Lock Nut Wrench

## Grinding / Sanding

## Angle Grinder


## 570 W Angle Grinder, Toggle Switch



<b>411</b> <small>mm</small>	<b>N9500N</b>
Continuous rating Input	570 W
Wheel Diameter	100 mm (4")
Hole Diameter	16 mm (5/8")
No Load Speed	12,000 RPM
Overall Length	245 mm
Net weight	1,6 - 1,9 kg
Power supply cord	2,5 m (8,2 ft)



Depressed Center Wheel, Wheel Cover, Lock Nut Wrench



## Straight Grinder

**204** mm**GS5000**  
125 mm (5")

Continuous rating Input	750W
Wheel Diameter	125 mm (5")
Hole Diameter	12,7, 20 mm (13/16")
No Load Speed	5.600 RPM
Dimensions (L x W x H)	590 x 189 x 116 mm
Net weight	5 - 5,2 kg
Power supply cord	2,5 m (8,2 ft)



## Disc Sander

**303** mm**GV7000**  
180 mm (7")

Continuous rating Input	550W
Abrasive Disc Size	180 mm (7")
Capacity	Pad: 180 mm (7")
No Load Speed	4.700 RPM
Overall Length	210 mm
Net weight	2,1 kg
Power supply cord	2,5 m (8,2 ft)



## Polisher

**303** mm**9237C**  
180 mm (7")

Continuous rating Input	1.200W
Capacity	Wool Bonnet: 180 mm (7") Wool Pad: 180 mm (7")
No Load Speed	0 - 3.200 RPM
Dimensions (L x W x H)	431 x 198 x 187 mm
Net weight	3,2 - 3,4 kg
Power supply cord	2,5 m (8,2 ft)



## Polisher

**303** mm**PV7000C**  
180 mm (7")

Continuous rating Input	900W
Capacity	Pad: 180 mm (7") Wool Bonnet: 180 mm (7")
No Load Speed	600 - 2.100 RPM
Overall Length	210 mm
Net weight	2,1 kg
Power supply cord	2,5 m (8,2 ft)



## Concrete Planer

**253** mm**PC5001C**  
125 mm (5")

Continuous rating Input	1.400 W
Wheel Diameter	125 mm (5")
Hole Diameter	22,23 mm (7/8")
No Load Speed	10.000 RPM
Dimensions (L x W x H)	479 x 182 x 195 mm
Net weight	4 kg
Power supply cord	5 m (16,4 ft)



## Die Grinder

**325** mm**GD0601**  
6 mm (1/4")

Continuous rating Input	400W
Collet Capacity	3, 6 mm or 3,7 - 4,06 lbs.
	3, 6 mm or 1/8, 1/4"
Wheel Diameter	38 mm (1-1/2")
No Load Speed	25.000 RPM
Dimensions (L x W x H)	359 x 82 x 82 mm
Net weight	1,68 - 1,84 kg
Power supply cord	2,5 m (8,2 ft)



## Die Grinder

**325** mm**GD0600**  
6 mm (1/4")

Continuous rating Input	400W
Collet Capacity	3, 6 mm or 3,77 - 4,12 lbs.
	3, 6 mm or 1/8, 1/4"
Wheel Diameter	38 mm (1-1/2")
No Load Speed	25.000 RPM
Dimensions (L x W x H)	358 x 82 x 82 mm
Net weight	1,71 - 1,87 kg
Power supply cord	2,5 m (8,2 ft)



## Die Grinder

**64** mm**GD0603**  
6 mm (1/4")

Continuous rating Input	240W
Collet Capacity	6 mm or 2.16 lbs.
	6 mm or 1/4"
Max Wheel Diameter	19 mm (3/4")
No Load Speed	28.000 RPM
Diameter of grip	65 mm
Circumference of Grip	203 mm
Portion	
Dimensions (L x W x H)	289 x 64 x 67 mm
Net weight	0,98 kg
Power supply cord	2,5 m (8,2 ft)



## Bench Grinder

**GB801**  
205 mm (8")

Continuous rating Input	550W
Wheel Diameter	205 mm (8")
Wheel width	19 mm (3/4")
Hole Diameter	15,88 mm (5/8")
H.P.	3/4
No Load Speed	2.850 RPM (50 Hz) / 3.450 RPM (60 Hz)
Dimensions (L x W x H)	395 x 265 x 333 mm
Net weight	19,91 - 19,63 kg



# Grinding / Sanding

## Bench Grinder

**GB602**  
150 mm (6")



Continuous rating Input	250W
Wheel Diameter	150 mm (6")
Wheel width	16 mm (5/8")
Hole Diameter	12,7 mm (1/2")
H.P.	1/3
No Load Speed	2.850 RPM (50 Hz) / 3.450 RPM (60 Hz)
Dimensions (L x W x H)	375 x 205 x 286 mm
Net weight	9,31 - 9,08 kg

## Belt Sander

303

**9404**  
100 mm x 610 mm (4" x 24")



Continuous rating Input	1.010 W
Belt Speed	210 - 440 m/min (690 - 1.440 ft/min)
Belt Size	100 x 610 mm (4 x 24")
Overall Length	334 mm
Net weight	4,8 kg
Power supply cord	5,0 m (16,4 ft)

## Belt Sander

303

**9920**  
76 mm x 610 mm (3" x 24")



Continuous rating Input	1.010W
Belt Speed	210 - 440 m/min (690 - 1.440 ft/min)
Belt Size	76 x 610 mm (3 x 24")
Overall Length	334 mm
Net weight	4,5 kg
Power supply cord	5,0 m (16,4 ft)

## Belt Sander

411

**9031**  
30 mm x 533 mm (1-3/16" x 21")



Continuous rating Input	550W
Belt Speed	200 - 1.000 m/min (656 - 3.280 ft/min)
Belt Size	30 x 533 mm
Overall Length	380 mm
Net weight	2,1 kg
Power supply cord	2,5 m (8,2 ft)

## Belt Sander

411

**9032**  
9 mm x 533 mm (3/8" x 21")



Continuous rating Input	500W
Belt Speed	300 - 1.700 m/min (980 - 5.600 ft/min)
Belt Size	9 x 533 mm
Max sanding depth	110 mm
Overall Length	420 mm
Net weight	1,6 kg
Power supply cord	2,5 m (8,2 ft)

## Finishing Sander

419

**BO4556**  
1/4 Sheet 200 W



Continuous rating Input	200W
Pad Size	112 x 102 mm (4-3/8 x 4")
Abrasive Paper Size	114 x 140 mm (4-1/2 x 5-1/2")
Orbits Per Minute	14.000 OPM
Dimensions (L x W x H)	131 x 112 x 141 mm
Net weight	1,1 kg
Power supply cord	2,0 m (6,6 ft)

## Finishing Sander

64

**BO3710**  
1/3 Sheet 190 W



Continuous rating Input	190W
Pad Size	93 x 185 mm (3-5/8 x 7-1/4")
Abrasive Paper Size	93 x 228 mm (3-5/8 x 9")
Orbits Per Minute	11.000 OPM
Strokes Per Minute	22.000 SPM
Orbit Diameter	2,0 mm (1/16")
Dimensions (L x W x H)	253 x 92 x 154 mm
Net weight	1,6 kg
Power supply cord	2,0 m (6,6 ft)

## Finishing Sander

64

**BO3711**  
1/3 Sheet 190 W



Continuous rating Input	190W
Pad Size	93 x 185 mm (3-5/8 x 7-1/4")
Abrasive Paper Size	93 x 228 mm (3-5/8 x 9")
Orbits Per Minute	4.000 - 11.000 OPM
Strokes Per Minute	8.000 - 22.000 SPM
Orbit Diameter	2,0 mm (1/16")
Dimensions (L x W x H)	253 x 92 x 154 mm
Net weight	1,6 kg
Power supply cord	2,0 m (6,6 ft)

## Orbital Sander

419

**9046**



Continuous rating Input	600W
Pad Size	115 x 229 mm (4-1/2 x 9")
Abrasive Paper Size	115 x 280 mm (4-1/2 x 11")
Orbits Per Minute	6.000 OPM
Overall Length	283 mm
Orbit Diameter	5 mm
Net weight	3,1 kg
Power supply cord	2,5 m (8,2 ft)

## Random Orbit Sander

419

**BO6050J**



Continuous rating Input	750W
Pad Diameter	150 mm (6")
Abrasive Disc Size	150 mm (6")
Orbits Per Minute	1.600 - 6.800 OPM
Sanding Strokes Per Minute	3.200 - 13.600 SPM
Pad speed in Roto-orbit mode	140 - 600 rpm
Orbit Diameter	5,5 mm
Dimensions (L x W x H)	330 x 155 x 145 mm
Net weight	2,6 kg
Power supply cord	2,5 m (8,2 ft)

## Random Orbit Sander

64

**BO5041**



Continuous rating Input	300W
Pad Diameter	123 mm (4-7/8")
Abrasive Disc Size	125 mm (5")
Orbits Per Minute	4.000 - 12.000 OPM
Dimensions (L x W x H)	218 x 123 x 153 mm
Net weight	1,4 kg
Power supply cord	2,0 m (6,6 ft)



# PRODUCTS

## ▣ SAWING



# Sawing

## Miter Saw

**LS1440**  
355 mm (14")



Continuous rating Input	1,380W
Blade Diameter	355 mm (14")
Hole Diameter	25, 25.4 mm (1")
Max Cutting Capacity	0°: 122 x 152 mm 45°: 122 x 115 mm
No Load Speed	3,200 RPM
Dimensions (L x W x H)	530 x 596 x 435 mm
Hole Diameter	25, 25.4 mm (1")
Net weight	34.2 kg
Power supply cord	2.5 m (8.2 ft)

Tool does not come with saw blade.

## Compound Miter Saw

**LS1040**  
260 mm (10-1/4")



Continuous rating Input	1,650W
Blade Diameter	260 mm (10-1/4")
Hole Diameter	15.88, 25, 25.4, 30 mm
Miter Angle	45 / 52° L, 45, 52° R
Bevel Angle	45° L
Max Cutting Capacity	0°: 90.5 x 95 mm 45°: 90.5 x 67 mm
No Load Speed	4,600 RPM
Dimensions (L x W x H)	530 x 476 x 532 mm
Net weight	12.4 kg
Power supply cord	2.5 m (8.2 ft)

Tool does not come with saw blade.

## Slide Compound Miter Saw

**LS1019L**  
260 mm (10-1/4")



**DXT**



Continuous rating Input	1,510W
Blade Diameter	260 mm (10-1/4")
Bevel Angle	48 / 48° L, 48, 48° R
Miter Angle	60 / 60° L, 60, 60° R
Max Cutting Capacity	0°: 68, 91 x 279, 310 mm 45°: 68, 91 x 197, 218 mm
No Load Speed	3,200 RPM
Dimensions (L x W x H)	805 x 644 x 660 mm
Net weight	26.3 kg
Power supply cord	2.5 m (8.2 ft)

## Table Saw

**2712**  
260 mm (10-1/4")



Blade Diameter	315 mm (12-3/8")
Hole Diameter	30.0 mm (1-3/16")
Max Cutting Capacity	0°: 85 mm (3-3/8") 45°: 58 mm (2-1/4")
No Load Speed	2,950, 3,400 RPM
Bevel Capacity	0 - 45°
Dimensions (L x W x H)	1,670 x 700 x 810 mm
Net weight	54 kg
Power supply cord	3.0 m (9.8 ft)

## Flip Over Saw

**LF1000**  
260 mm (10-1/4")



**Flipper**



Continuous rating Input	1,650W
Blade Diameter	260 mm (10-1/4")
Max Cutting Capacity	45°: 50 x 150 mm 90°: 20, 68 x 155, 210 mm
No Load Speed	2,700 RPM
Hole Diameter	30, 25.4 mm (1-3/16, 1")
Dimensions (L x W x H)	Miter saw: 660 x 650 x 1,220 mm Table saw: 660 x 650 x 1,060 mm
Net weight	36 kg
Power supply cord	2.5 m (8.2 ft)

## Table Saw

**2703**  
255 mm (10")



Continuous rating Input	1,650W
Blade Diameter	255 mm (10")
Max Cutting Capacity	0°: 91 mm (3-9/16") 45°: 63 mm (2-1/2")
No Load Speed	4,600 RPM
Dimensions (L x W x H)	560 x 686 x 308 mm
Net weight	17.8 - 18.9 kg
Power supply cord	2.5 m (8.2 ft)

## Circular Saw

**5800NB**  
180 mm (7-1/8")



Continuous rating Input	900W
Blade Diameter	180 mm (7-1/8")
Hole Diameter	19.05, 20 mm (3/4, 13/16")
Max Cutting Capacity	0°: 64 mm (2-1/2") 45°: 43 mm (1-11/16")
No Load Speed	4,500 RPM
Overall Length	272 mm
Net weight	3.5 kg
Power supply cord	5.0 m (16.4 ft)

## Circular Saw

**N5900B**  
235 mm (9-1/4")



Continuous rating Input	2,000W
Blade Diameter	235 mm (9-1/4")
Hole Diameter	25 mm (1")
Max Cutting Capacity	0°: 85 mm (3-3/8") 45°: 60 mm (2-3/8") 50°: 53 mm (2-1/16")
No Load Speed	4,100 RPM
Overall Length	380 mm
Net weight	6.8 kg
Power supply cord	2.5 m (8.2 ft)

## Circular Saw

**5008MG**  
210 mm (8-1/4")



Continuous rating Input	1,800W
Blade Diameter	210 mm (8-1/4")
Hole Diameter	15.88, 20, 25, 25.4, 30 mm (5/8, 13/16, 1, 1-3/16")
Max Cutting Capacity	0°: 75.5 mm (3") 45°: 57 mm (2-1/4") 50°: 51.5 mm (2")
No Load Speed	5,200 RPM
Dimensions (L x W x H)	332 x 243 x 277 mm
Net weight	4.8 kg
Power supply cord	2.5 m (8.2 ft)

## Plunge Cut Circular Saw

**SP6000**  
165 mm (6-1/2")



Continuous rating Input	1,300W
Wheel Diameter	165 mm (6-1/2")
Hole Diameter	20 mm (13/16")
Blade Diameter	165 mm (6-1/2")
Max Cutting Capacity	0°: 56 mm (2-3/16") 45°: 40 mm (1-9/16") 48°: 38 mm (1-1/2")
No Load Speed	2,200 - 6,400 RPM
Dimensions (L x W x H)	341 x 225 x 250 mm
Net weight	4.1 kg
Power supply cord	2.5 m (8.2 ft)



# Sawing

## Jig Saw

**4327M**  
210 mm (8-1/4")



Continuous rating Input	450W
Capacity	Wood: 65 mm (2-9/16") Steel: 6 mm (1/4")
Length of Stroke	18 mm (11/16")
Strokes Per Minute	500 - 3,100 SPM
Dimensions (L x W x H)	224 x 77 x 197 mm
Net weight	1.9 kg
Power supply cord	2.0 m (6.6 ft)



## Jig Saw

**4329**



Continuous rating Input	450W
Max Cutting Capacity at 0°	Wood: 65 mm (2-9/16") Steel: 6 mm (1/4")
Length of Stroke	18 mm (11/16")
Strokes Per Minute	500 - 3,100 SPM
Dimensions (L x W x H)	223 x 77 x 197 mm
Net weight	1.9 kg
Power supply cord	2.0 m (6.6 ft)

Dasar Die-Cast Aluminium



## Recipro Saw

**JR3070CT**



Continuous rating Input	1,510W
Length of Stroke	32 mm (1-1/4")
Strokes Per Minute	0 - 2,800 SPM
Capacity	Pipe: 130 mm (5-1/8") Wood: 255 mm (10")
Overall Length	485 mm
Net weight	4.6 kg
Power supply cord	2.5 m (8.2 ft)

**AVT**



## Recipro Saw

**JR3051TK**



Continuous rating Input	1,200W
Length of Stroke	30 mm (1-3/16")
Strokes Per Minute	0 - 3,000 SPM
Capacity	Pipe: 130 mm (5-1/8") Wood: 255 mm (10")
Dimensions (L x W x H)	447 x 97 x 176 mm
Net weight	3.2 - 3.3 kg
Power supply cord	2.5 m (8.2 ft)



## Band Saw

**LB1200F**



Continuous rating Input	900W
Blade Length	2,240 mm (88")
Capacity	Thickness of cut: 165 mm Throat: 305 mm (12")
Blade Speed	High: (50Hz) 800 (60Hz) 1,000 m/min (50Hz) 2,624 (60Hz) 3,280 ft/min Low: (50Hz) 400 (60Hz) 500 m/min (50Hz) 1,312 (60Hz) 1,640 ft/min
Dimensions (L x W x H)	615 x 775 x 1,600 mm
Net weight	82 kg
Power supply cord	2.5 m (8.2 ft)



## Scroll Saw

**SJ401**



Continuous rating Input	50W
Capacity	Thickness of cut: 50 mm (2") Throat: 406 mm (16")
Length of Stroke	18 mm (11/16")
Strokes Per Minute	400 - 1,600 SPM
Overall Length	600 mm
Net weight	14 kg (30.87 lbs.)



# PRODUCTS

## ▣ PLANING / ROUTERING



# Planing / Routing

## Power Planer

153 mm

**2012NB**  
304 mm (12")



Continuous rating Input	1,650W
Planing Width	304 mm (12")
Cutting Width	304 mm (12")
Cutting Depth	Cutting width 0-150 mm: 3 mm (1/8") Cutting width 150-240 mm: 1.5 mm (1/16")
Feed rate/min.	8.5 m (27.9 ft)
No Load Speed	8,500 RPM
Dimensions (L x W x H)	483 x 771 x 401 mm
Net weight	27.1 - 27.6 kg
Power supply cord	2.5 m (8.2 ft)

## Power Planer

153 mm

**1805N**  
155 mm (6-1/8")



Continuous rating Input	1,140W
Planing Width	155 mm (6-1/8")
Planing Depth	2 mm (1/16")
No Load Speed	15,000 RPM
Overall Length	445 mm
Net weight	7.9 kg
Power supply cord	5.0 m (16.4 ft)

## Power Planer

106 mm

**1911B**  
110 mm (4-3/8")



Continuous rating Input	840W
Planing Width	110 mm (4-3/8")
Planing Depth	2 mm (1/16")
No Load Speed	16,000 RPM
Overall Length	355 mm
Net weight	4.1 kg
Power supply cord	5.0 m (16.4 ft)

## Power Planer

411 mm

**KP0800XK**  
82 mm (3-1/4")



Continuous rating Input	620W
Planing Width	82 mm (3-1/4")
Planing Depth	2.5 mm (3/32")
Shipping	9 mm (11/32")
No Load Speed	17,000 RPM
Dimensions (L x W x H)	285 x 158 x 158 mm
Net weight	2.8 kg
Power supply cord	2.5 m (8.2 ft)

## Plate Joiner

459 mm

**PJ7000**



Continuous rating Input	701W
Blade Diameter	100 mm (4")
No Load Speed	11,000 RPM
Hole Diameter	22 mm (7/8")
Wheel Diameter	100 mm (4")
Dimensions (L x W x H)	302 x 139 x 145 mm
Net weight	2.8 kg
Power supply cord	2.5 m (8.2 ft)

## Trimmer

411 mm

**3709**  
6 mm (1/4")



Continuous rating Input	530W
Collet Capacity	6 mm or 1/4"
No Load Speed	30,000 RPM
Dimensions (L x W x H)	82 x 90 x 199 mm
Net weight	1.5 kg
Power supply cord	2.5 m (8.2 ft)

## Trimmer

411 mm

**RT0702C**  
6 mm (1/4"), 8 mm (3/8")



new

Continuous rating Input	710W
Collet Capacity	6, 8 mm or 1/4, 3/8"
No Load Speed (RPM)	10,000 - 34,000 RPM
Dimensions (L x W x H)	89 x 89 x 210 mm
Net weight	1.8 - 2.8 kg

## Trimmer

51 mm

**N3701**  
6 mm (1/4")



Continuous rating Input	440W
Collet Capacity	6 mm or 1/4"
No Load Speed	30,000 RPM
Overall Height	181 mm
Net weight	1.6 kg
Power supply cord	2.5 m (8.2 ft)

## Groove Cutter

153 mm

**3501N**  
120 mm (4-3/4")



Continuous rating Input	1,160W
Max cutter blade size	Diameter x Width: 120 x 36 mm (4-3/4 x 1-3/8")
Max cutting depth	Cutter / Cutter: 30 mm (1-1/8") / 65 mm (2-1/2")
No Load Speed	6,500 RPM
Overall Length	365 mm
Net weight	7.2 kg
Power supply cord	5.0 m (16.4 ft)

## Router

153 mm

**3601B**  
12 mm (1/2")



Continuous rating Input	930W
Collet Capacity	12 mm or 7.9 lbs.
No Load Speed	23,000 RPM
Overall Height	190 mm
Net weight	3.6 kg
Power supply cord	5.0 m (16.4 ft)

## Router

**RP2302FC**  
12 mm (1/2")



new

Continuous rating Input	2,300W
Collet Capacity	12 mm or 13.7 lbs.
Plunge Capacity	0 - 70 mm (0 - 2-3/4")
Base dia.	170 mm (6-11/16")
No Load Speed	9,000 - 23,000 RPM
Dimensions (L x W x H)	155 x 294 x 327 mm
Net weight	6.2 kg
Power supply cord	4.0 m (13.1 ft)



# Others



## Blower

UB1103



303 mm

Continuous rating Input	600W
Max Air Volume	0 - 4.1 m <sup>3</sup> /min
Max Air Velocity	0 - 91 m/s
Air Pressure	0 - 5.7 kPa
No Load Speed	0 - 16,000 RPM
Dimensions (L x W x H)	479 x 185 x 178 mm
Net weight	1.9 - 2.2 kg
Power supply cord	2.5 m (8.2 ft)



## Electric Chain Saw

UC4041A



132 mm

Continuous rating Input	1,800W
Chain speed per minute	870 m (2,900 ft)
Guide Bar Length	400 mm (16")
Saw chain	Pitch: 3/8"
Dimensions (L x W x H)	455 x 245 x 200 mm
Net weight	4.7 kg
Power supply cord	0.3 m (0.98 ft)



Saw Chain, Guide Bar Cover, Hook complete

## Heat Gun

HG6030



Continuous rating Input	1,800W
Dimensions (L x W x H)	233 x 80 x 208 mm
Net weight	0.57 kg
Power supply cord	2.0 m (6.6 ft)



## Heat Gun

HG6530VK




Continuous rating Input	2,000W
Air Temperature	50 - 650 °C
Air Flow	Stage 1: 500 L/min Stage 2: 280 L/min Stage 3: 550 L/min
Dimensions (L x W x H)	257 x 85 x 206 mm
Net weight	0.72 kg
Power supply cord	2.0 m (6.6 ft)



# Makita - A Global Brand

Makita telah mendirikan basis bisnis yang dioperasikan secara langsung di sekitar 50 negara di seluruh dunia, dan telah meningkatkan jaringan penjualan di lebih dari 170 negara dan kemampuan layanan purna jual untuk menjadi salah satu perusahaan terkemuka di industri. Selain itu, Makita memproduksi perkakas listrik dan OPE di Cina, Rumania, Thailand, Inggris, Brasil, AS, dan Jerman. Saat ini, sekitar 90% dari pekerjaan manufaktur dalam hal volume produksi dilakukan di luar negeri.

Jaringan penjualan dan layanan Makita di seluruh dunia, serta kualitas produksi yang stabil dan tinggi yang dipastikan di pabriknya di seluruh dunia adalah perwujudan dari merek Makita.

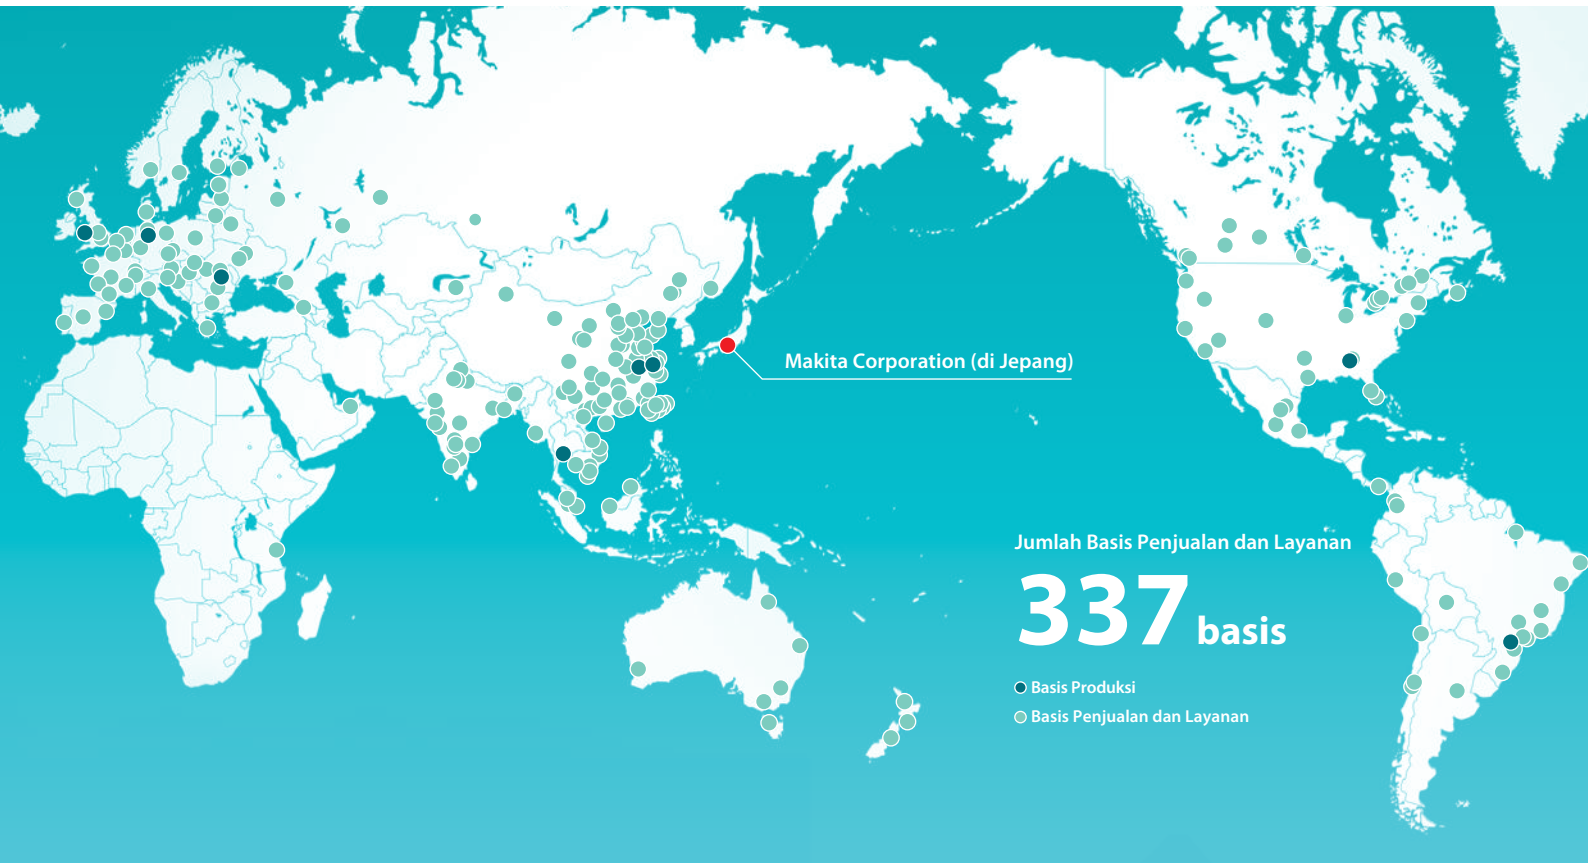

## JAPAN

Makita Corporation Headquarters



## JAPAN

Okazaki Plant



## U.S.A.

U.S. Plant



## UNITED KINGDOM

U.K. Plant



## ROMANIA

Romania Plant



## GERMANY

Germany Plant



## BRAZIL

Brazil Plant



## CHINA

China Plant (MCC)



## CHINA

China Plant (MKC)



## THAILAND

Thailand Plant







[▶ Makita IDN](#)
[📷 Makita.idn](#)
[f Makita Indonesia](#)

SERVICE CENTER  
**0800 1152 792**  
 (BEBAS PULSA)

**Free Demo & Trial**  
**021 7590 8899**  
 TECHNICAL SUPPORT



 **Service Center**