


SWITCH CIRCUIT			MATERIAL AND FINISH AS BELOW						
WHEN CARD IS EJECTED		WHEN CARD IS INSERTED	A	Housing	LCP UL94V-0 Black	E			
OPEN		CLOSE	B	Contact	Phosphor Bronze C5191, 0.15t, Contact Area:5u" Gold, Solder Area:Gold Flash	F			
			C	Switch	Phosphor Bronze C5191, 0.15t, Gold Flash	G			
						H			

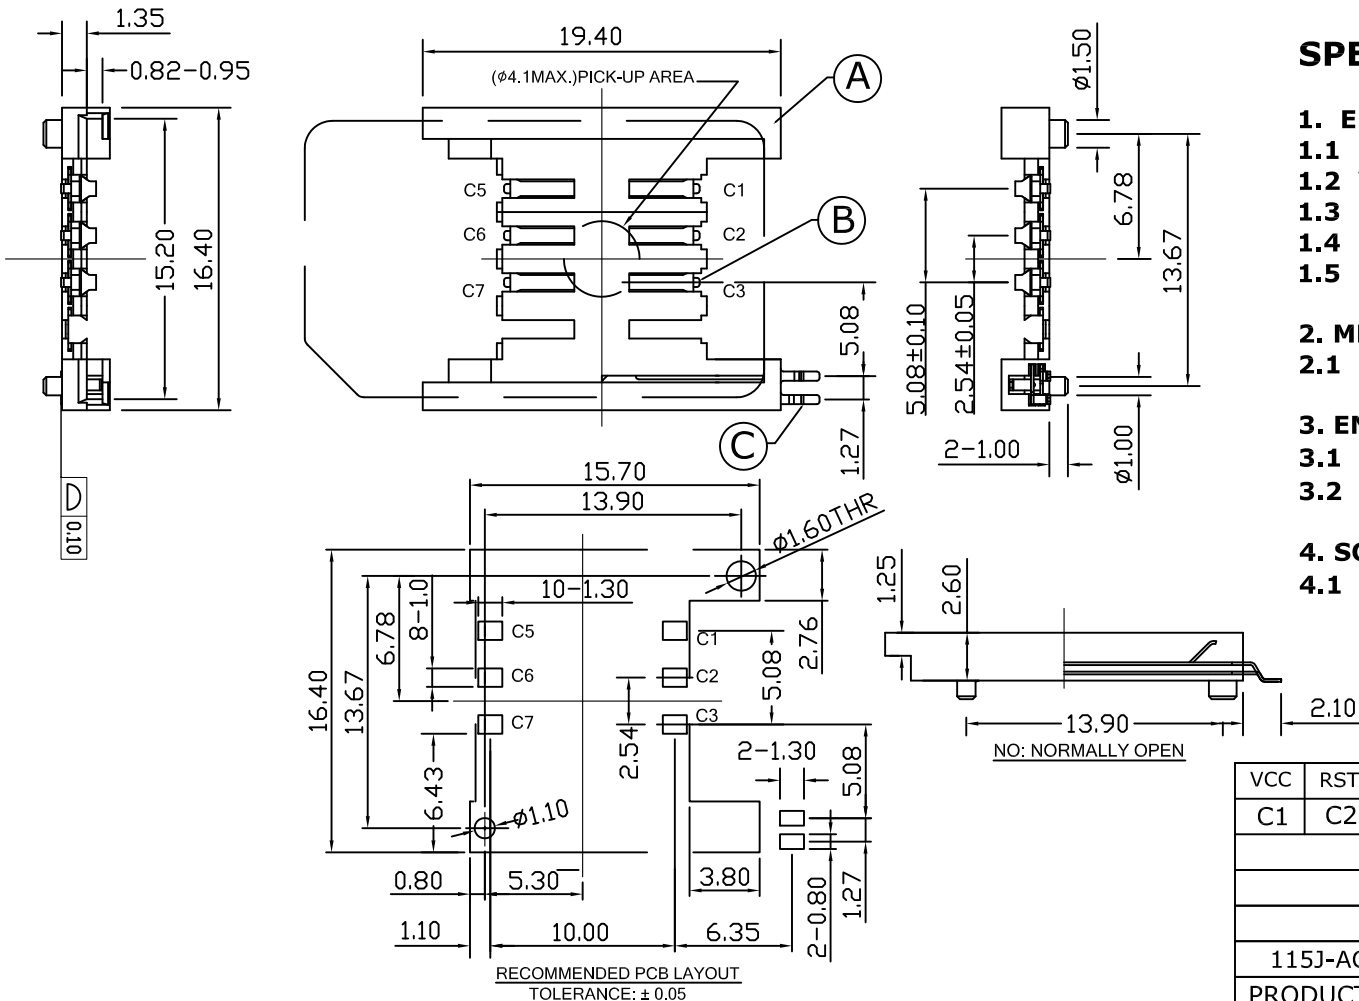

**SPECIFICATION:**

- 1. ELECTRICAL**
  - 1.1 Current Rating: 1.0A
  - 1.2 Voltage Rating: 30V AC/DC
  - 1.3 Contact Resistance: 50mΩ
  - 1.4 Insulation Resistance: 1000MΩ
  - 1.5 Dielectric Withstanding Voltage: 500VDC
- 2. MECHANICAL**
  - 2.1 Durability: 10000 Cycle
- 3. ENVIRONMENTAL**
  - 3.1 Operating temperature range: -40°C~+85°C
  - 3.2 Storage temperature range: -40°C~+85°C
- 4. SOLDER ABILITY**
  - 4.1 Recommended IR Reflow Temperature: 260°C

VCC	RST	CLK	GND	VPP	I/O					
C1	C2	C3	C5	C6	C7					

**PIN ASSIGNMENT**

115J-ACO0		SIM Card 6Pin Socket Normally Open Switch , Contact Area:5u" Gold								
PRODUCT NO.	DESCRIPTION									

UNLESS OTHERWISE SPECIFIED TOLERANCE		
ANGLES	ANG.	±5°
LINEAR	0.	±0.3
	0.0	±0.25
	0.00	±0.20
SCALE	AS SHOWN	UNIT: mm
DRAWN	Willis	2013/09/24
CHECKED	Angel	2013/09/24
APPROVED	Ken	2013/09/24



www.attend.com.tw

Revise:										
Revise:										
Revise:										

REV.	DESCRIPTION	DATE	REV.	DESCRIPTION	DATE	SIZE	REV.	FILE NAME
1						A4	1.0	115J-ACO0_B_1