



## Tall Tubular - 12V200Ah (20hr)

### BATTERY CONSTRUCTION


Component	Positive Plate	Negative Plate	Container	Cover	Safety Valve	Terminal	Separator	Electrolyte
Raw Material	Lead Dioxide	Lead	PPCP	PPCP	NA	Lead Alloy	PVC	Flooded free acid

### GENERAL FEATURES

- The battery is having free  $H_2SO_4$  electrolyte and requires, DM Water topping up once every six months
- Can be installed in vertical direction only
- Lead, Antimony, Tin alloy grid for high Corrosion resistance
- Long service life, float or cyclic applications.
- Low Maintenance, operation
- Low self discharge
- Case and cover available in standard PPCP material

### DIMENSIONS AND WEIGHT

Length (mm)	500
Width (mm)	187
Height (mm)	416
Approx Weight (kg)	36/63
(Dry/Filled)	

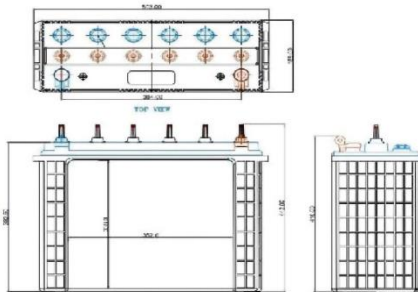

### PERFORMANCE CHARACTERISTICS

Nominal Voltage	12V
Number of cell	6
Design Life	5-7 years

### NOMINAL CAPACITY (27°C)

20 hour rate (10A, 10.5V)	200Ah
10 hour rate (17.6A, 10.5V)	176Ah
5 hour rate (30A, 10.5V)	150Ah

### SELF DISCHARGE

2.5% of capacity declined per month at 27°C (average) Operating Temperature Range	
Discharge	-20-50°C
Charge	-10-50°C
Storage	-20-50°C
Max. Discharge Current 77°F (25°C)	160A(3s)
Short Circuit Current	200A
Charge Methods: Constant Current Charge 77°F (25°C)	

### CYCLE USE

Maximum charging voltage	14.5-14.6v
Maximum charging current	20A
Temperature compensation	75mV/300moh

### STANDBY USE

Maximum charging voltage	14.1-14.4V
No charge current limit is required	
Temperature compensation	

### DISCHARGE CONSTANT CURRENT (AMPERES AT 27°C)

Hours	5h	10h	20h
Final Voltage	10.5	10.5	10.5
% of 20h capacity	150	176	200

(Note) The above characteristics data are average values obtained within three charge/discharge cycles not the minimum values.

