

Ecorel Flexipack Pvt. Ltd.

ABOUT US

We are equipped with 5.5 mtr wide width blown extrusion machine with imported die (designed from North America) .It helps to get uniform thickness in complete width of film to have minimum gsm variation. We are manufacturing plastic film with wide range of applications like construction film used in road making, mulching film, green house film, pond lining film, tarpaulin, liner bags. The thickness, colour and size of film can be customised according to need to customer. We have inhouse laboratory to check the quality of incoming material, WIP and finished good to avert any kind of quality issue at customer's end.

CONTACT US

Phone


(M) 9828995833, 7976797004,
6353140304

Email

ecorel.pack@gmail.com

Adress

G745 Phase IV, RIICO Boranada,
Jodhpur - 342001

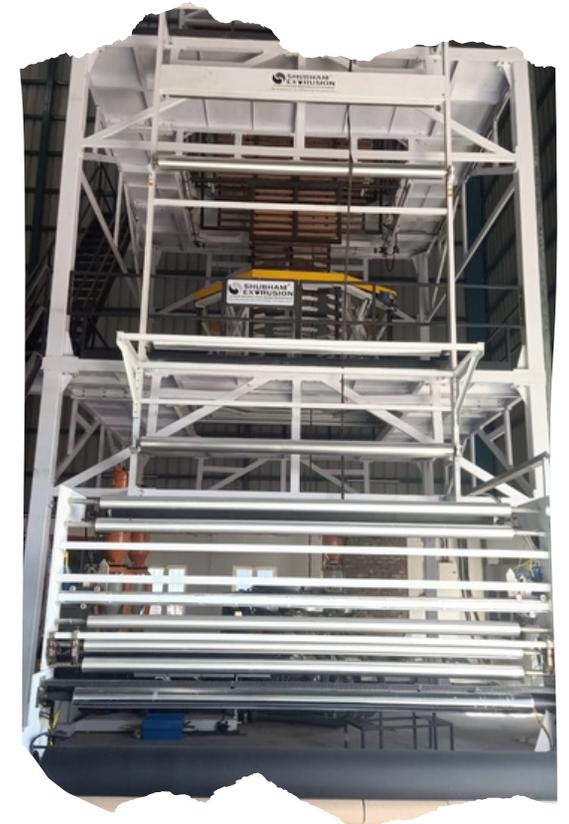

BUSINESS BROCHURE



Construction Film

5.5 mtr wide width film in various thickness for high strength, minimum gauge variation, high water resistant and high durability.

Thickness – 100 to 250 mic

Type – Roll form and Bundled Form



Shrink Hood/Pallet Cover

High Mechanical strength, puncture resistance, high holding force which helps to retain the actual shape of goods. ease of transportation and handling and keeps product safe from contamination (dust, dirt, moisture).

Thickness - 100 to 250 mic

Type –Bundled Form

Colour- as desired



Mulch Film

Multi layer film with UV stabilizer which helps to retain

- a.Reduce water consumption
- b.Increase soil temperature
- c.Speed up germination and cultivation cycle
- d.Eliminate/Reduce the usage of herbicides and pesticides

Thickness – 25 to 40 mic

Type –Bundled Form



Tarpaulin

HD and LL based Tarpaulin as protection cover from dust and moisture of grains and goods.

Thickness - 100 to 250 mic

Type –Bundled Form

Colour- as desired



Collation Shrink Film

An alternative to corrugated box, cost effective, low carbon foot print, water and spill proof.

Thickness - 65 mic

Type –Roll Form



Green House Film

Temperature control for plants
Thickness - 100 to 250 mic
Type – Bundled Form



PE Release Film/Tubber Separator Film

Smooth protective release film
a.Used in curing process of tires and retreads, rubber sheeting
b.Increases mechanical properties of tyre
c.Retains freshness, stickiness and cleanliness of rubber
Thickness - 80 to 120 mic
Roll Width - 16 to 120 cm
Roll Length- Per your requirements
Film Color - Pink, White, Blue, Violet, Yellow, Beige, Green
Core Inner Diameter- 76 mm core
Film Texture – Plain Smooth