


LED MERCURY

An excellent energy-saving replacement for HID or high wattage CFL and incandescent light bulbs. It also produces similar brightness to HID with superior quality of light. Perfect for applications that require extremely bright light sources and less bulb changes in hard to reach locations.



Industrial / Warehouse

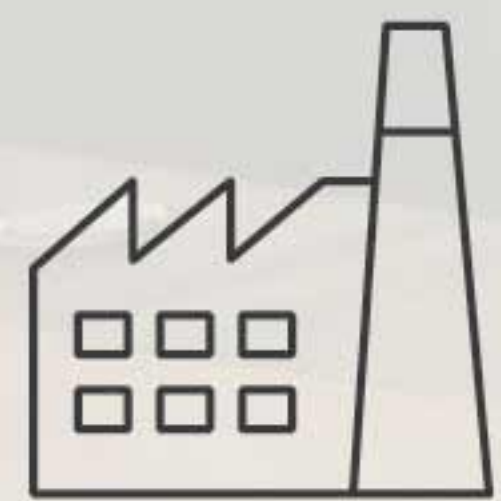

Rate (W)	Voltage(V) Frequency(Hz)	Flux (lm)	Colour	Colour Temp (K)	RA	Power Factor	Beam Angle (degree)	Lifetime (hours)	Lamp Base	IP	Driver	Dimension (w x l x h :mm.)	Weight (g)	Package size (pieces : mm.)
35	220-240 50/60Hz	4200	Extra Daylight	6500K	70	0.5	-	12000	E27	-	-	90x90x211	250	1pc : 93x93x225 10pcs : 192x471x233 100pcs: 477x966x474
45	220-240 50/60Hz	5200	Extra Daylight	6500K	70	0.5	-	12000	E27	-	-	90x90x211	290	1pc : 93x93x225 10pcs : 192x471x233 100pcs: 477x966x474
65	220-240 50/60Hz	6800	Extra Daylight	6500K	70	0.5	-	12000	E40	-	-	120x120x293	540	1pc : 125x125x308 6pcs : 256x381x298
85	220-240 50/60Hz	8800	Extra Daylight	6500K	70	0.5	-	12000	E40	-	-	120x120x293	540	1pc : 125x125x308 6pcs : 256x381x298