

MyTarget POKKT Mediation

POKKT SDK version used: **7.5.0**

MyTarget SDK version used: **4.8.0 (GDPR Compliance)**

Prerequisites

- Create account at <https://target.my.com> and add your application.
- Read instructions at https://target.my.com/partners/help/ios_sdk/getting_started to understand integration of iOS application with MyTarget.

Step 1: Configure POKKT Dashboard


- Create account at <http://www.pokkt.com>
- To use the MyTarget Mediation please enter the following details on POKKT Dashboard:

Configuration

App Key	<input type="text" value="42a656858d"/>
Class Name	<input type="text" value="com.pokkt.thirdparty.LoopmeNetwork"/>
ECPM	<input type="text" value="1"/>

- **Class Name (required)**: This is the class name that you define inside your application to set up the network. Classname for the network can be set during SDK integration. If you are using Pokkt's default adaptors for mediation, then class name will be "MyTargetNetwork" (you can simply copy-paste it without the quotes).
- **SlotId**: MyTarget uses "slotId" as ad placement id, map Pokkt's "screen name" with the MyTarget's "slotId". Please check MyTarget documentation for more details.

- Please provide reporting api key which is available at ReportingAPI details section of MyTarget account.

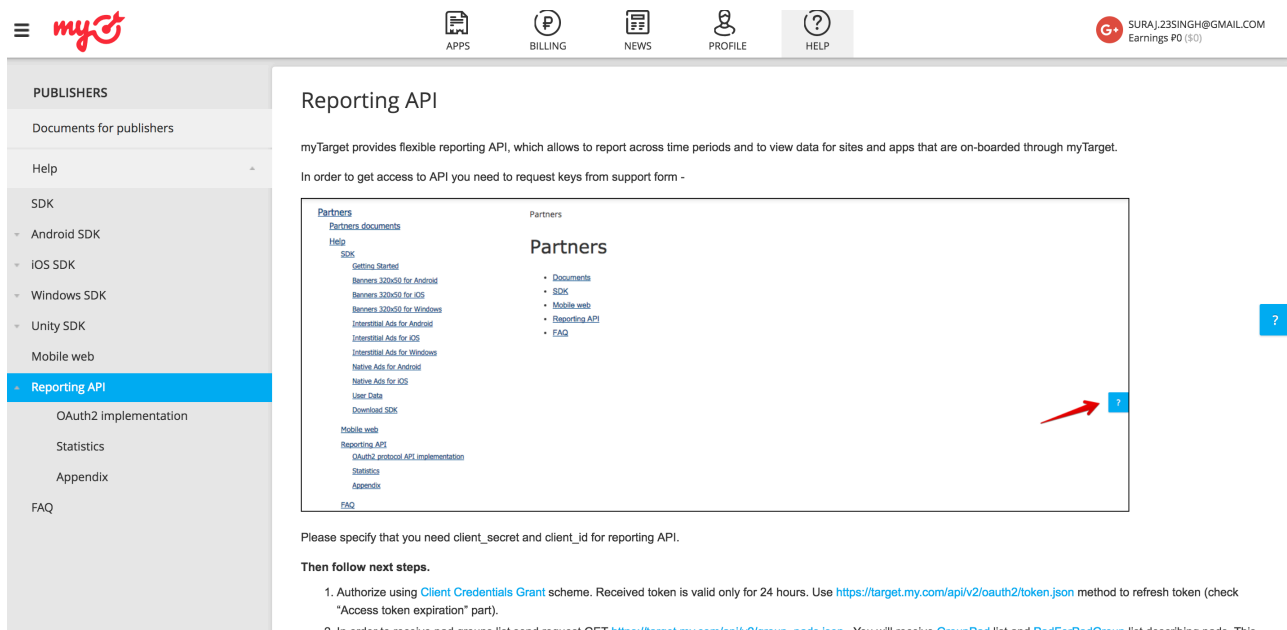

Reporting API

myTarget provides flexible reporting API, which allows to report across time periods and to view data for sites and apps that are on-boarded through myTarget.

In order to get access to API you need to request keys from support form -

Partners documents
[Help](#)
[SDK](#)
[Getting Started](#)
[Banner 320x50 for Android](#)
[Banner 320x50 for iOS](#)
[Banner 320x50 for Windows](#)
[Interstitial Ads for Android](#)
[Interstitial Ads for iOS](#)
[Interstitial Ads for Windows](#)
[Native Ads for Android](#)
[Native Ads for iOS](#)
[User Data](#)
[Download SDK](#)
[Mobile web](#)
[Reporting API](#)
[OAuth2 protocol API implementation](#)
[Statistics](#)
[Appendix](#)
[FAQ](#)

Partners
[Documents](#)
[SDK](#)
[Mobile web](#)
[Reporting API](#)
[FAQ](#)

Please specify that you need client_secret and client_id for reporting API.

Then follow next steps.

1. Authorize using [Client Credentials Grant](#) scheme. Received token is valid only for 24 hours. Use <https://target.my.com/api/v2/oauth2/token.json> method to refresh token (check "Access token expiration" part).
2. In order to receive partner names list send request GET <https://target.my.com/api/v2/nmin/names.json>. You will receive [GroupPart](#) list and [PartForPartGroup](#) list describing names. This

Step 2: Configuration in Application

- Download the mediation project from POKKT and it is recommended to use the same class file **MyTargetNetwork** in your project. And if you want to do some changes please do those changes in same file.
- Add the MyTargetSDK either as a standalone library file in libs folder.