
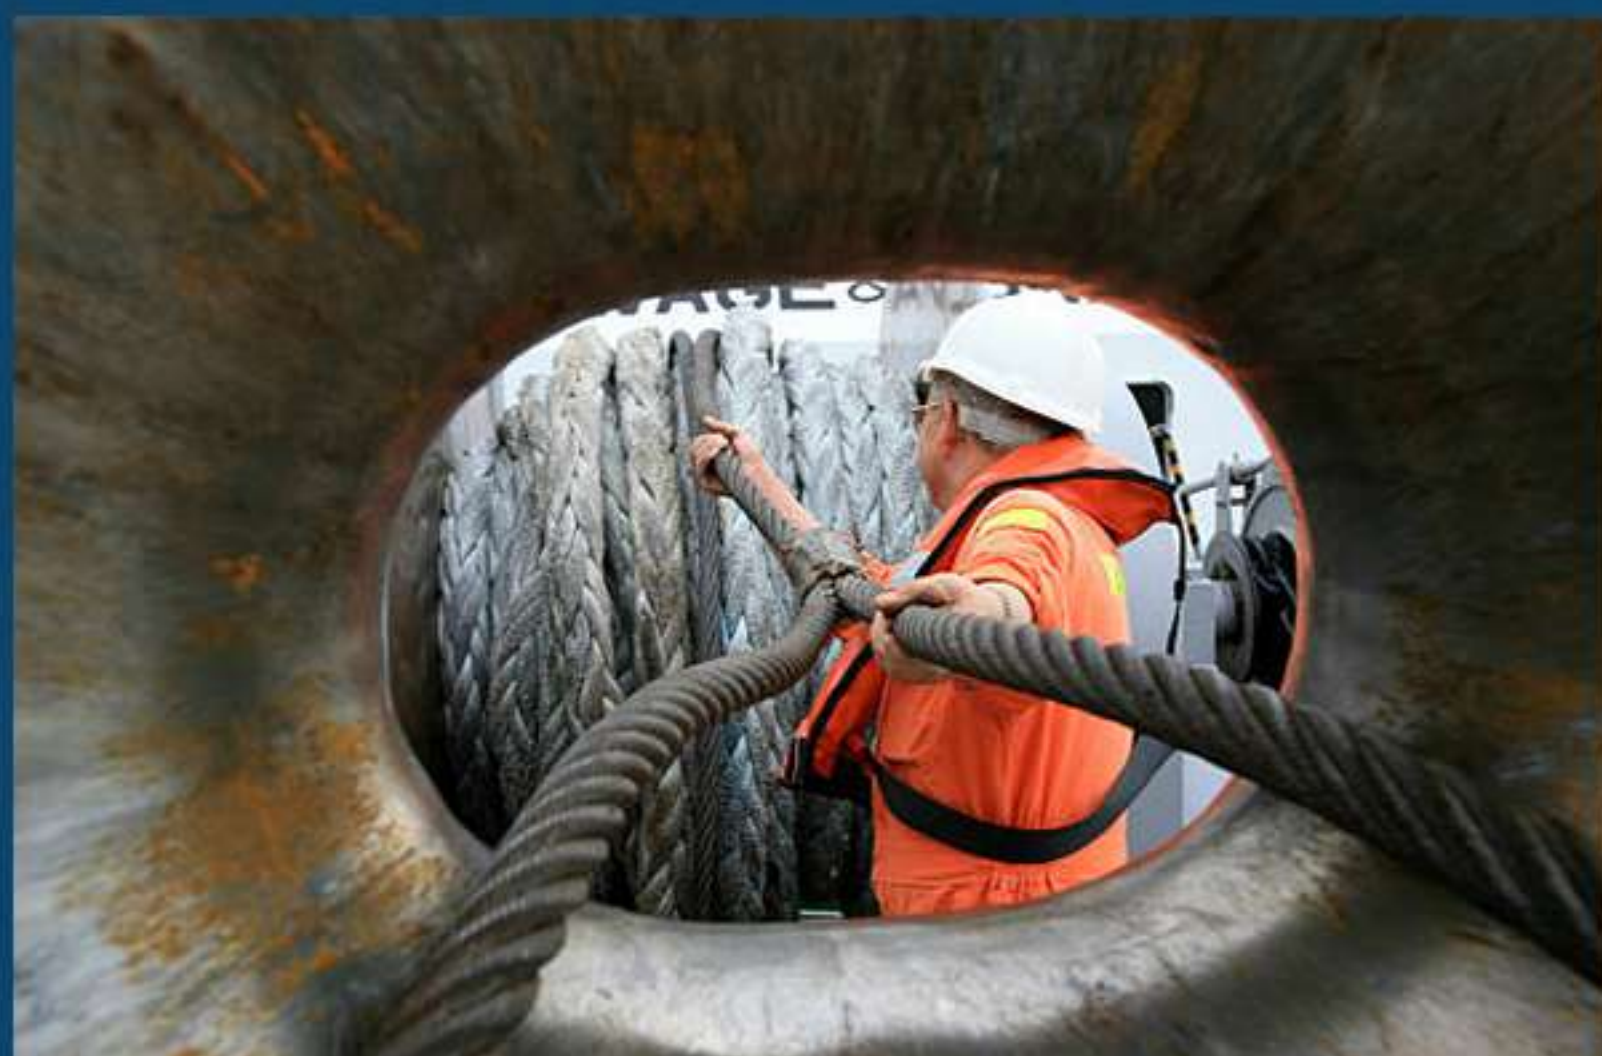


MULTIPACK ROPES CATALOGUE

2021-2022

DANLINE, MONOFILAMENT,
FILM ROPES & TWINES

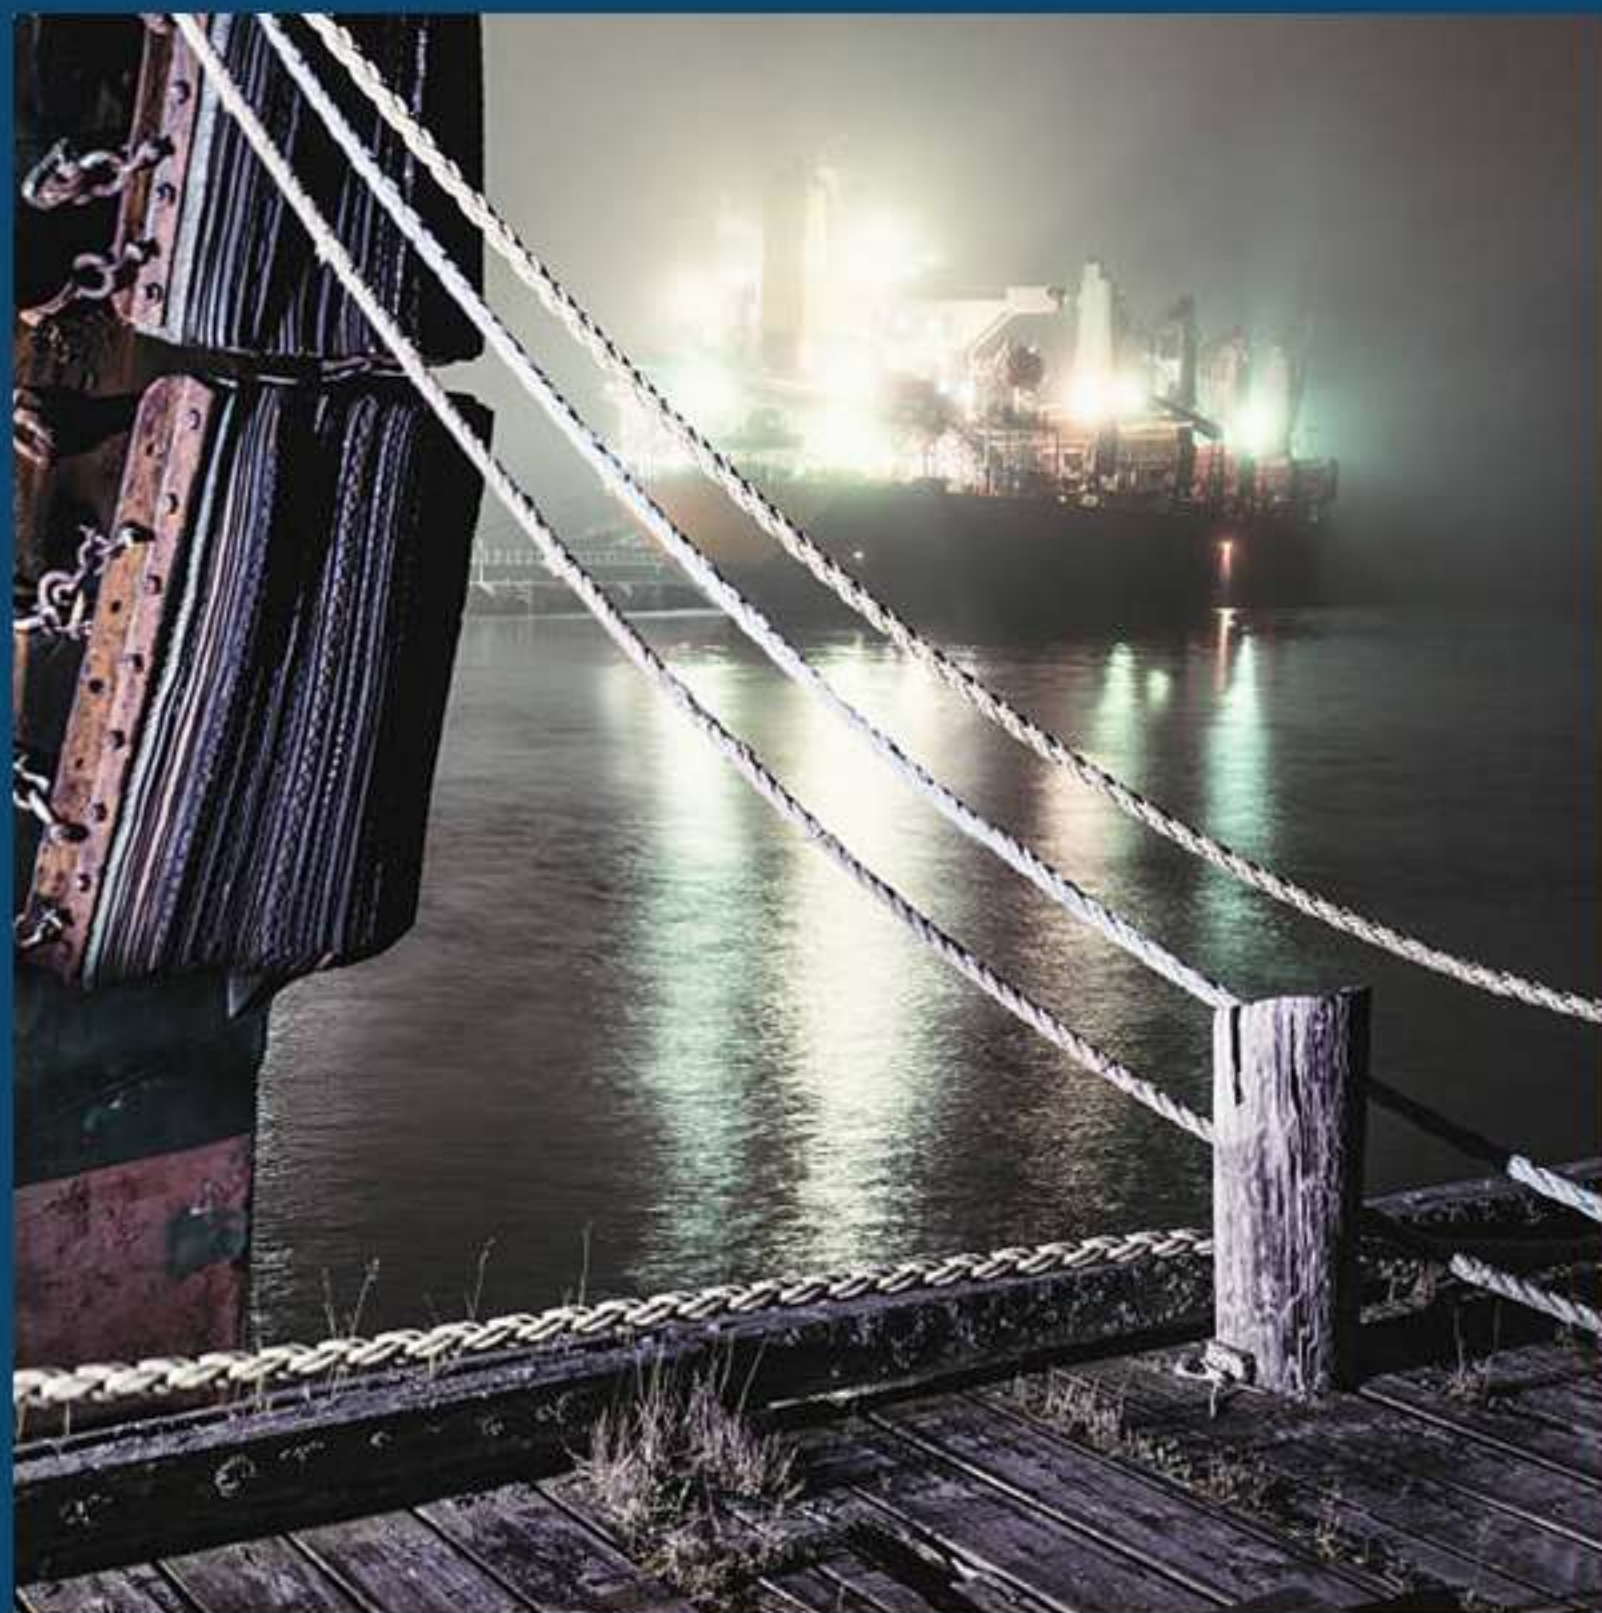

MULTIPACK
Plastic Industries

We Understand Packaging



www.multipackglobal.com



MULTIPACK
Plastic Industries
We Understand Packaging



ABOUT US

MULTIPACK PLASTIC INDUSTRIES

We introduce ourselves as the famous manufacture & exporter of high-quality Monofilament Rope, HDPE Rope, Polypropylene Rope, PP Dan line Rope, PP Baler Twine & PP Film Rope. Offered products (Ropes) are manufactured using excellent quality raw material and advanced technology as per the set industry standards. These products are highly appreciated for features like smooth texture, high durability, wear & tear resistance and high tensile strength. We offer these products in various specifications to meet different requirements of our customers.

Our company consistently focuses on betterment of our all products by keeping pace with the latest developments in the field and the customer at our prime focus. The company is achieving new goals every year.



PRODUCTS:

1. MULTIPACK HDPE (PE) MONOFILAMENT ROPE

2. MULTIPACK POLYPROPYLENE MONOFILAMENT ROPE

3. MULTIPACK POLYPROPYLENE FILM ROPE

4. MULTIPACK POLYPROPYLENE DANLINE ROPE

5. MULTIPACK BALER TWINE



www.multipackglobal.com



MULTIPACK
Plastic Industries
We Understand Packaging



MULTIPACK HDPE (PE) MONOFILAMENT ROPE

Specifications (3 & 4 Strand):

SIZE (DIAMETER)		WEIGHT	MINIMUM BREAKING STRENGTH	
mm	Inch	Kgs/100 mtrs	Kgs	Lbs
4	5/32"	0.81	200	441
6	1/4"	1.82	400	882
8	5/16"	3.27	700	1543
10	3/8"	4.90	1100	2425
12	1/2"	7.20	1500	3307
14	9/16"	9.50	2100	4630
16	5/8"	12.80	2800	6173
18	3/4"	16.10	3500	7716
20	13/16"	20.00	4300	9480
22	7/8"	24.30	5100	11244
24	1"	29.50	6100	13448
28	1-1/8"	39.30	8200	18078
32	1-5/16"	52.50	10700	23589

Tolerance: up to 14mm = + / - 8%, 16mm & above + / - 5%

Characteristics:

- ✓ Resistance to abrasion
- ✓ Shock loading
- ✓ Smooth finish
- ✓ Easy to handle
- ✓ Same breaking strength in dry or wet conditions
- ✓ Variety of colours

Applications:

- ✓ Commercial
- ✓ Marine & Fishing
- ✓ Domestic
- ✓ Trap fishing application
- ✓ Line haulers



www.multipackglobal.com



MULTIPACK
Plastic Industries
We Understand Packaging



MULTIPACK POLYPROPYLENE MONOFILAMENT ROPE

Specifications (3 & 4 Strand):

SIZE (DIAMETER)		WEIGHT	MINIMUM BREAKING STRENGTH	
mm	Inch	Kgs/100 mtrs	Kgs	Lbs
4	5/32"	0.74	214	472
6	1/4"	1.70	602	1327
8	5/16"	3.00	1060	2337
10	3/8"	4.60	1560	3439
12	1/2"	6.60	2210	4872
14	9/16"	9.00	3050	6724
16	5/8"	11.60	3770	8311
18	3/4"	14.80	4810	10604
20	13/16"	18.00	5800	12787
22	7/8"	22.00	6960	15344
24	1"	26.00	8130	17923
26	1-5/64"	31.00	9410	20745
28	1-1/8"	35.50	10700	23589
30	1-1/4"	41.00	12220	26940
32	1-5/16"	46.00	13500	29762

Tolerance: up to 14mm = + / - 8%, 16mm & above + / - 5%

Characteristics:

- ✓ Floats on water
- ✓ Minimal water absorption
- ✓ Low weight

Applications:

- ✓ Safety float, Anchor & Mooring lines for small craft
- ✓ Safety, Nursery & All-purpose lines
- ✓ Alongside towing & Tie- downs



www.multipackglobal.com



MULTIPACK
Plastic Industries
We Understand Packaging



MULTIPACK POLYPROPYLENE FILM ROPE

Specifications (3 & 4 Strand):

SIZE (DIAMETER)		WEIGHT	MINIMUM BREAKING STRENGTH	
mm	Inch	Kgs/100 mtrs	Kgs	Lbs
4	5/32"	0.74	214	472
6	1/4"	1.70	602	1327
8	5/16"	3.00	1060	2337
10	3/8"	4.55	1560	3439
12	1/2"	6.59	2210	4872
14	9/16"	9.00	3050	6724
16	5/8"	11.59	3770	8311
18	3/4"	14.80	4810	10604
20	13/16"	18.00	5800	12787
22	7/8"	22.00	6960	15344
24	1"	26.00	8130	17924
28	1-1/8"	35.50	10700	23589
30	1-1/4"	40.46	12220	26940
32	1-5/16"	46.00	13500	29762

Tolerance: up to 14mm = + / - 8%, 16mm & above + / - 5%

Characteristics:

- ✓ Light Weight
- ✓ Positive buoyancy (floats)
- ✓ Doesn't absorb water

Applications:

- ✓ Hoisting, Rigging
- ✓ Safety & All-purpose lines
- ✓ Mooring & Barge lines



www.multipackglobal.com



MULTIPACK
Plastic Industries
We Understand Packaging



MULTIPACK POLYPROPYLENE DANLINE ROPE

Specifications (3 & 4 Strand):

SIZE (DIAMETER)		WEIGHT	MINIMUM BREAKING STRENGTH	
mm	Inch	Kgs/100 mtrs	Kgs	Lbs
4	5/32"	0.74	280	617
6	1/4"	1.70	680	1499
8	5/16"	3.00	1200	2646
10	3/8"	4.55	1800	3968
12	1/2"	6.59	2700	5952
14	9/16"	9.00	3600	7937
16	5/8"	11.59	4500	9921
18	3/4"	14.80	5800	12787
20	13/16"	18.00	6900	15212
22	7/8"	22.00	8400	18519
24	1"	26.00	9900	21826
28	1-1/8"	35.50	13200	29101
32	1-5/16"	46.00	16800	37038

Tolerance: up to 14mm = + / - 8%, 16mm & above + / - 5%

Characteristics:

- ✓ High ultra – violet light resistance
- ✓ Anti - abrasion
- ✓ Stronger than Multipack PP Monofilament Ropes

Applications:

- ✓ Fishing & Marine (Aquaculture & Fish farming)
- ✓ Rigging & Used in oil fields
- ✓ Industrial



www.multipackglobal.com



MULTIPACK
Plastic Industries
We Understand Packaging



MULTIPACK BALER TWINE

Polypropylene / Split film – Baler Twine

Specification as per European Market

TYPE	RUNNAGE M/kg.	Mt. / Box	BREAKING STRENGTH Kgf.	Knot Strength Kgf	Kg. / Box
900	900	6800	44	24	8.10
750	750	6400	51	28	9.00
500	500	4250	72	40	9.00
400	400	4200	88	49	11.00
350	350	3660	100	55	11.00
330	330	3660	105	58	11.60
300	300	3050	115	64	10.70
265	265	2820	129	72	11.10
150	150	2620	222	128	18.70
130	130	2200	255	147	18.20
120	120	1220	275	160	10.70

Available traverse heights of Twine Spools: 150mm = 6 Inch,
200mm = 8 Inch, 250mm = 10 Inch, 300mm = 12 Inch

Characteristics:

- ✓ Knotless Packing
- ✓ Light in weight
- ✓ Easy to handle

Applications:

- ✓ In Sugar industry
- ✓ In Agriculture industry



www.multipackglobal.com



Multipack Plastic Industries

We Understand Packaging



Address: H-701, Titanium City Center, 100 Feet Road, Anand Nagar, Satellite, Ahmedabad - 380015, Gujarat, India



Tel: +917940193950



Email: enquiry@multipackglobal.com



Website: www.multipackglobal.com



www.multipackglobal.com